

READ THIS FIRST!

- If you already have another type of transponder on your windshield, contact the Customer Service Center.
- You MUST correctly and permanently install the transponder on the inside of the windshield with the barcode facing the driver. Do not attach the transponder to your visor or other temporary location.
- If you have more than one vehicle, be sure the proper transponder is in the correct vehicle.
- Install the transponder when the windshield's temperature is above 50°F (10°C). In colder climates, use your heater/defroster to warm the windshield before installing the transponder. Also, wipe the windshield dry before installing the transponder.
- If you have a motorcycle or vehicle with special needs, please contact Customer Service.



1 Choose Location from Illustrations Below

2 Clean Area Using Alcohol Wipe

Mirror Mounted to Header



Mirror Mounted to Windshield



Large Truck, No Rearview Mirror




Adhere to right of center post.



Use This Ruler

3 Peel Off Backing

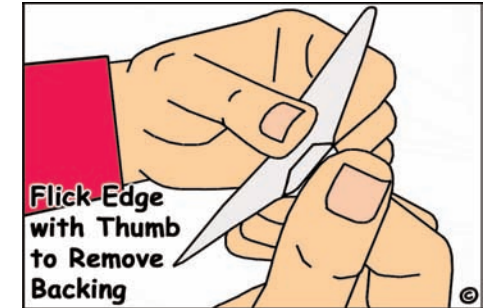


Once the transponder is installed, removal will destroy or deactivate it.

Remember, you need to remove the air bubbles between the windshield and transponder or the transponder may not work as designed.


Continued on other side

4 Apply

Make sure you have the transponder in the correct location (Step 1) before touching it to the glass. Hold the transponder away from the glass with one hand, and press one edge to the glass.

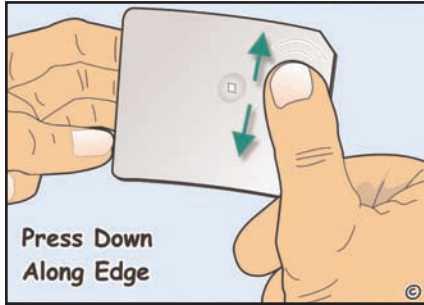

Stick the transponder to the glass by rubbing your thumb up and down in a zigzag motion across entire transponder surface. Be sure to rub over the transponder's chip to remove as much air as possible.

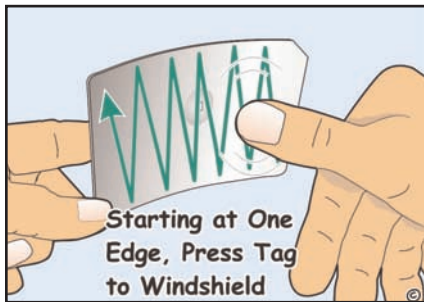

Step outside your vehicle, and look at the transponder through the windshield. If your transponder looks like **Photo A**, with air trapped between the transponder and windshield, continue rubbing on transponder from the center to the edges to remove trapped air.

Photo A
Too much trapped air; continue pushing out trapped air by rubbing on transponder as shown in Step 4.



Photo B
Good installation; you're done.



5 You're Good To Go!

Use *Good To Go!* express lanes and there's no need to stop or even slow down. You won't see or hear any lights or beeps. Simply enjoy a safer, more reliable commute.

Removing Your Transponder

Once you remove your transponder, you cannot reuse it. If you decide to remove the transponder from your windshield, first peel off the transponder, then scrape off any remaining transponder residue, and finally clean that area of your windshield with an alcohol wipe or windshield cleaner.

 Use caution if using sharp tools to remove old transponder.



Customer Service: 1-866-936-8246
wsdot.wa.gov/goodto go

Quick and Easy Installation Instructions *Good To Go!*[™]



IMPORTANT
READ ALL OF THESE INSTRUCTIONS BEFORE
INSTALLING THIS TRANSPONDER