



Transmittal Number PT 14-113	Date January 2015
Publication Title / Publication Number <i>Hydraulics Manual M 23-03.04</i>	
Originating Organization Environmental and Engineering Programs, Hydraulics Office, through Administrative and Engineering Publications	

Remarks and Instructions

This supplement revises *Hydraulics Manual* Section 1-3.1, Hydraulic Report Types. It provides revised instructions for report types required for WSDOT projects. As stated in Chapter 1-2 of the WSDOT June 2010 Hydraulics Manual, Headquarters Hydraulics takes the primary responsibility for the hydrological, hydraulic and riverine analyses in specialty areas such as fish passage, river restoration, scour, floodways/floodplains, and water crossings. The revised Section 1-3.1 adds the specialty report requirement for project elements that are to be performed by Headquarters Hydraulics (or other qualified and approved personnel) and revises which elements require a Type A Hydraulic Report. This will eliminate redundant documentation for supporting engineering justification for all drainage modifications that occur as a result of a project.

The complete manual, revision packages, and individual chapters can be accessed at www.wsdot.wa.gov/publications/manuals/m23-03.htm.

Please contact Katie Mozes at 360-705-7261 or Jay Christianson at 360-705-7269 with comments, questions, or suggestions for improvement to the manual.

Instructions for Printed Manuals

Page numbers indicating portions of the manual that are to be removed and inserted are shown below.

Chapter	Remove Pages	Insert Pages
Title Page	i–ii	i–ii
Contents	iii–viii	iii–viii
Chapter 1 Design Policy	1-1 – 1-18	1-1 – 1-18

To get the latest information for WSDOT administrative and engineering manuals, sign up for e-mail updates for individual manuals at www.wsdot.wa.gov/publications/manuals/.

Washington State Department of Transportation
Administrative and Engineering Publications
PO Box 47304
Olympia, WA 98504-7304

Phone: 360-705-7430
E-mail: engrpubs@wsdot.wa.gov

Approved By	Signature
-------------	-----------



**Washington State
Department of Transportation**

Hydraulics Manual

M 23-03.04

January 2015

Environmental and Engineering Programs
Hydraulics Office

Americans with Disabilities Act (ADA) Information

Materials can be made available in an alternate format by emailing the WSDOT Diversity/ADA Affairs Team at wsdotada@wsdot.wa.gov or by calling toll free, 855-362-4ADA (4232). Persons who are deaf or hard of hearing may make a request by calling the Washington State Relay at 711.

Title VI Notice to the Public

It is Washington State Department of Transportation (WSDOT) policy to ensure no person shall, on the grounds of race, color, national origin, or sex, as provided by Title VI of the Civil Rights Act of 1964, be excluded from participation in, be denied the benefits of, or be otherwise discriminated against under any of its federally funded programs and activities. Any person who believes his/her Title VI protection has been violated may file a complaint with WSDOT's Office of Equal Opportunity (OEO). For Title VI complaint forms and advice, please contact OEO's Title VI Coordinator at 360-705-7082 or 509-324-6018.

To get the latest information on WSDOT publications, sign up for individual email updates at www.wsdot.wa.gov/publications/manuals.

Washington State Department of Transportation
Hydraulics Office
PO Box 47329
Olympia, WA 98504

Chapter 1	Design Policy	1-1
1-1	General	1-1
1-2	Responsibility	1-2
1-3	Hydraulic Reports	1-3
1-4	Storm Frequency Policy and Recommended Software/Design Tools	1-8
1-5	Hydraulic Report Review Schedule	1-11
	Appendix 1-1 Conversion Table	1-14
	Appendix 1-2 Environmental Documentation	1-15
	Appendix 1-3 Hydraulic Report Outline	1-16
	Appendix 1-4 Hydraulic Report Checklist	1-17
Chapter 2	Hydrology	2-1
2-1	General Hydrology	2-1
2-2	Selecting a Method	2-2
2-3	Drainage Basin	2-5
2-4	Cold Climate Considerations	2-5
	2-4.1 Calculating Snowmelt	2-5
	2-4.2 Additional Considerations	2-6
2-5	The Rational Method	2-7
	2-5.1 General	2-7
	2-5.2 Runoff Coefficients	2-8
	2-5.3 Time of Concentration	2-10
	2-5.4 Rainfall Intensity	2-13
	2-5.5 Rational Formula Example	2-16
2-6	Single-Event Hydrograph Method: Santa Barbara Urban Hydrograph	2-16
	2-6.1 Design Storm Hyetograph	2-17
	2-6.2 Runoff Parameters	2-18
	2-6.3 Hydrograph Synthesis	2-22
	2-6.4 Level Pool Routing	2-23
	2-6.5 Hydrograph Summation	2-24
2-7	Continuous Simulation Method (Western Washington Only for Stormwater)	2-24
	2-7.1 Modeling Requirements	2-25
2-8	Published Flow Records	2-28
2-9	USGS Regression Equations	2-29
2-10	Flood Reports	2-31
2-11	Mean Annual Runoff	2-32
	Appendix 2-1 USGS Streamflow Gage Peak Flow Records	2-33
	Appendix 2-2 USGS Regression Equations	2-93
	Appendix 2-3 Isopluvial and MAP Web Links and Mean Annual Runoff Data	2-103

Chapter 3	Culvert Design	3-1
3-1	Overview	3-1
3-1.1	Metric Units and English Units	3-1
3-2	Culvert Design Documentation	3-2
3-2.1	Common Culvert Shapes and Terminology	3-2
3-2.2	Hydraulic Reports	3-3
3-2.3	Required Field Data	3-3
3-2.4	Engineering Analysis	3-5
3-3	Hydraulic Design of Culverts	3-7
3-3.1	Culvert Design Flows	3-8
3-3.1.1	Precast Reinforced Concrete Three Sided Structure	3-9
3-3.1.2	Additional Requirement for Culverts Over 20'	3-10
3-3.1.3	Alignment and Grade	3-10
3-3.1.4	Allowable Grade	3-10
3-3.1.5	Minimum Spacing	3-11
3-3.1.6	Culvert Extension	3-11
3-3.1.1	Temporary Culverts	3-12
3-3.2	Allowable Headwater	3-12
3-3.2.1	General	3-12
3-3.2.2	Allowable Headwater for Circular and Box Culverts and Pipe Arches	3-13
3-3.2.3	Allowable Headwater for Bottomless Culverts	3-15
3-3.3	Tailwater Conditions	3-15
3-3.4	Flow Control	3-16
3-3.4.1	Culverts Flowing With Inlet Control	3-16
3-3.4.2	Calculating Headwater for Inlet Control	3-17
3-3.4.4	Calculating Headwater for Outlet Control	3-26
3-3.4.5	Outlet Control Nomographs	3-28
3-3.5	Velocities in Culverts — General	3-42
3-3.5.1	Calculating Outlet Velocities for Culverts in Inlet Control	3-43
3-3.5.2	Calculating Outlet Velocities for Culverts in Outlet Control	3-44
3-3.6	Culvert Hydraulic Calculations Form	3-50
3-3.7	Computer Programs	3-55
3-3.8	Example	3-56
3-4	Culvert End Treatments	3-61
3-4.1	Projecting Ends	3-61
3-4.2	Beveled End Sections	3-62
3-4.3	Flared End Sections	3-63
3-4.4	Headwalls and Slope Collars	3-64
3-4.5	Wingwalls and Aprons	3-65
3-4.6	Improved Inlets	3-66
3-4.7	Energy Dissipators	3-67
3-4.8	Culvert Debris	3-68
3-5	Miscellaneous Culvert Design Considerations	3-72
3-5.1	Multiple Culvert Openings	3-72
3-5.2	Camber	3-73
3-5.5	Angle Points	3-73
3-5.6	Upstream Ponding	3-74
3-5.7	Misc Design Considerations – Siphons	3-75

Chapter 4	Open Channel Flow	4-1
4-1	General	4-1
4-2	Determining Channel Velocities	4-2
4-2.1	Field Measurement	4-3
4-2.2	Manning's Equation	4-4
4-2.2.1	Hand Calculations	4-5
4-2.2.2	Field Slope Measurements	4-8
4-2.2.3	Manning's Equation in Sections	4-9
4-3	Roadside Ditch Design Criteria	4-11
4-4	Critical Depth	4-11
4-4.1	Example Critical Depth in a Rectangular Channel	4-13
4-4.2	Example Critical Depth in a Triangular Channel	4-13
4-4.3	Example Critical Depth in a Trapezoidal Channel	4-14
4-4.3	Example Critical Depth in a Circular Shaped Channel	4-14
4-5	River Backwater Analysis	4-14
4-6	River Stabilization	4-16
4-6.1	Bank Barbs	4-17
4-6.1.1	Riprap Sizing for Bank Barbs	4-20
4-6.1.2	Riprap Placement for Bank Barbs	4-22
4-6.1.3	Vegetation	4-22
4-6.2	Drop Structures	4-23
4-6.3	Riprap Bank Protection	4-25
4-6.3.1	Riprap Sizing for Bank Protection	4-26
4-6.3.2	Placement of Riprap Bank Protection	4-29
4-6.3.3	Scour Analysis for Bridges and Three Sided Culverts	4-30
4-6.4	Engineered Log Jams and Large Woody Debris	4-31
4-7	Downstream Analysis	4-32
4-7.1	Downstream Analysis Reports	4-33
4-7.2	Review of Resources	4-33
4-7.3	Inspection of Drainage Conveyance System	4-34
4-7.4	Analysis of Off Site Affects	4-34
4-8	Weirs	4-35
4-8.1	Rectangular Weirs	4-36
4-8.2	V-Notch Weirs	4-37
4-8.3	Trapezoidal or Cipoletti Weirs	4-37
	Appendix 4-1 Manning's Roughness Coefficients (n)	4-1

Chapter 5	Drainage of Highway Pavements	5-1
5-1	Roadway and Structure Geometrics and Drainage	5-1
5-2	Hydrology	5-2
5-3	Rural Highway Drainage	5-2
5-3.1	Downstream End of Bridge Drainage	5-3
5-3.2	Slotted Drains and Trench Systems	5-3
5-3.3	Drop Inlets	5-4
5-4	Gutter Flow	5-4
5-5	Grate Inlets and Catch Basins	5-6
5-5.1	Inlet Types	5-7
5-5.2	Capacity of Inlets on a Continuous Grade	5-12
5-5.3	Side Flow Interception	5-14
5-5.4	Capacity of Inlets in Sag Locations	5-20
5-6	Hydroplaning and Hydrodynamic Drag	5-26
Chapter 6	Storm Drains	6-1
6-1	Introduction	6-1
6-2	Design Criteria	6-2
6-3	Data for Hydraulics Report	6-5
6-4	Storm Drain Design – Handheld Calculator Method	6-6
6-4.1	General	6-6
6-4.2	Location	6-6
6-4.3	Discharge	6-6
6-4.4	Drain Design Section	6-9
6-4.5	Drain Profile	6-11
6-4.6	Remarks	6-11
6-5	Storm Drain Design – Computer Analysis	6-11
6-6	Hydraulic Grade Line	6-12
6-6.1	Friction Losses in Pipes	6-14
6-6.2	Junction Entrance and Exit Losses	6-14
6-6.3	Losses From Changes in Direction of Flow	6-15
6-6.4	Losses From Multiple Entering Flows	6-16
6-7	Drywells	6-17
6-8	Pipe Materials for Storm Drains	6-17
6-9	Subsurface Drainage	6-18
Chapter 7	Fish Passage	7-1
7-1	Introduction	7-1
7-2	Designing for Fish Passage	7-1
7-2.1	General	7-1
7-2.2	Types of Structures	7-2
7-2.3	Culvert Design Approach	7-2
7-2.	River Training Devices	7-3

Chapter 8	Pipe Classifications and Materials	8-3
8-1	Classifications of Pipe	8-3
8-1.1	Drain Pipe	8-4
8-1.2	Underdrain Pipe	8-4
8-1.3	Culvert Pipe	8-5
8-1.4	Storm Sewer Pipe	8-9
8-1.5	Sanitary Sewer Pipe	8-10
8-2	Pipe Materials	8-11
8-2.1	Concrete Pipe	8-11
8-2.2	Metal Pipe – General	8-13
8-2.3	Thermoplastic Pipe – General	8-16
8-2.4	Ductile Iron Pipe	8-20
8-2.5	Solid Wall HDPE	8-20
8-3	Vacant	8-20
8-4	Pipe Corrosion Zones and Pipe Alternate Selection	8-20
8-4.1	Corrosion Zone I	8-21
8-4.2	Corrosion Zone II	8-22
8-4.3	Corrosion Zone III	8-23
8-5	Corrosion	8-29
8-5.1	pH	8-29
8-5.2	Resistivity	8-30
8-5.3	Methods for Controlling Corrosion	8-30
8-6	Abrasion	8-32
8-7	Pipe Joints	8-34
8-8	Pipe Anchors	8-35
8-8.1	Thrust Blocks	8-35
8-9	Pipe Rehabilitation and Abandonment	8-35
8-9.1	Pipe Replacement	8-35
8-9.2	Trenchless Techniques for Pipe Replacement	8-36
8-10	Pipe Design	8-37
8-10.1	Categories of Structural Materials	8-37
8-10.2	Structural Behavior of Flexible Pipes	8-37
8-10.3	Structural Behavior of Rigid Pipes	8-38
8-10.4	Foundations, Bedding, and Backfill	8-39
8-11	Structural Analysis and Fill Height Tables	8-40
8-11.1	Pipe Cover	8-40
8-11.2	Shallow Cover Installation	8-40
8-11.3	Fill Height Tables	8-42

1-1 General

The *Hydraulics Manual* M 23-03 provides the guidance for designing hydraulic features related to WSDOT transportation design including: hydrology, culverts, open channel flow, drainage collection and conveyance systems, fish passage, and pipe materials. These hydraulic features are necessary to maintain safe driving conditions and protect the highway against surface and subsurface water. The chapters contained in this manual are based on the Federal Highway Administration's (FHWA) *Hydraulic Engineering Circulars* (HECs) that can be found at www.fhwa.dot.gov/bridge/hydpub.htm.

This manual makes frequent references to the *Highway Runoff Manual* M 31-16 (HRM), which provides the WSDOT requirements for managing stormwater discharges to protect water quality, beneficial uses of the state's waters, and the aquatic environment in general. The intent is that the two manuals are to be used in tandem for complete analysis and design of stormwater facilities for roadway and other transportation infrastructure projects. Projects should also consult the WSDOT *Design Manual* M 22-01, specifically Section 1210 and for design-build projects the *Guidebook for Design-Build Highway Project Development*.

In addition to the guidance in this manual, project engineer offices (PEOs) should use good engineering judgment and always keep in mind the legal and ethical obligations of WSDOT concerning hydraulic issues. Drainage facilities must be designed to convey the water across, along, or away from the highway in the most economical, efficient, and safest manner without damaging the highway or adjacent property. Furthermore, care must be taken to ensure that the highway construction does not interfere with or damage any of these facilities.

This chapter of the *Hydraulics Manual* explains the WSDOT policy regarding hydraulic design and hydraulic reports. In [Section 1-2](#), the roles and responsibilities of both the PEO and Headquarters (HQ) Hydraulics Office are defined. WSDOT has specific documentation requirements for the hydraulic report which are specified in [Section 1-3](#). Each hydraulic feature is designed based on specific design frequencies and in some cases a specific design tool or software. A summary of the design frequency and recommended design tools or software for most hydraulic features contained in this manual is summarized in [Section 1-4](#). Finally, [Section 1-5](#) defines the process for reviewing and approving a hydraulic report.

1-2 Responsibility

The project engineer's office (PEO) is responsible for the preparation of correct and adequate drainage design. Actual design work may be performed in the PEO, by another WSDOT office, or by a private consulting engineer. However, in all cases, it is the project engineer's responsibility to ensure that the design work is completed and that a hydraulic report is prepared as described in [Section 1-3](#) of this manual. In addition, the hydraulic report should follow the review process outlined in [Section 1-5](#). The PEO is also responsible for initiating the application for hydraulic related permits required by various local, state, and federal agencies.

While the region is responsible for the preparation of hydraulic reports and PS&E for all drainage facilities except bridges, assistance from the HQ Hydraulics Office may be requested for any drainage facility design. The HQ Hydraulics Office offers technical assistance to project engineers, WSDOT consultants, and Highways and Local Programs for the items listed below.

1. Hydraulic design of drainage facilities (culverts, storm drains, stormwater BMPs, siphons, channel changes, etc.).
2. Hydraulic design of structures (culverts, headwalls, fish ladders, etc.).
3. Hydraulic support for bridge scour, bridge foundations, water surface profiles and analysis of floodwaters thru bridges.
4. Analysis of stream bank erosion along roadways and river migration and the design of stabilization counter measures and environmental mitigation.
5. Flood plain studies, flood predictions, and special hydrological analysis (snowmelt estimates, storm frequency predictions, etc.)
6. Analysis of closed drainage basins and unusual or unique drainage conditions.
7. Wind and wave analysis on open water structures.
8. Technical support to Highways and Local Programs for hydraulic or bridge related needs.
9. Providing the Washington State Attorney General's Office with technical assistance on hydraulic issues.
10. Design of large woody debris (LWD) for stream enhancement. If the PEO or the Region Hydraulic Engineer performs the design, a Washington State licensed civil or structural engineer shall affix their stamp to the plans.

The HQ Hydraulics Office takes primary responsibility in the following specialty areas:

1. Ensuring that the information in the WSDOT *Hydraulics Manual* is accurate and current.
2. Ensuring that the engineering related information in the WSDOT *Highway Runoff Manual* M 31-16 is accurate and current.
3. Hydraulic analysis of bridges, including hydraulic conveyance, floodplain impacts, deck drainage, and foundation scour.

4. Hydraulic design of all large span corrugated metal culverts.
5. Hydraulic design of large span concrete culverts.
6. Hydraulic design of pumping facilities.
7. River hydraulic and backwater analysis.
8. Maintaining WSDOT *Standard Plans* M 21-01, the *Standard Specifications* M 41-10, and *General Special Provisions* (GSPs) involving drainage related items.
9. Design of water supply and sewage disposal systems for safety rest areas. The project engineer's office is responsible for contacting individual fire districts to collect local standards and forward the information onto HQ Hydraulics.
10. Reviewing and approving Type A hydraulic reports, unless otherwise delegated to the Regional Administrator.
11. Providing the regions with technical assistance on hydraulic issues that are the primary responsibility of the region.
12. Providing basic hydrology and hydraulics training material to the regions. Either regional or HQ personnel can perform the actual training. See the HQ Hydraulics web page for information on course availability at www.wsdot.wa.gov/design/hydraulics/training.htm.
13. Stream river restoration.
14. The design of engineered log jams throughout the state, including a monitoring plan to observe installation and collect data.
15. Review and approval of LWD calculations due to the inherent risks and liability.

1-3 Hydraulic Reports

The hydraulic report is intended to serve as a complete documented record containing the engineering justification for all drainage modifications that occur as a result of the project. The primary use of a hydraulic report is to facilitate review of the design and to assist in the preparation of the PS&E. The writer should approach the hydraulic report from the position of its defense in a court of law. It should be clearly written and show conditions before and after construction.

This section contains specific guidance for developing, submitting, and archiving a hydraulic report.

1-3.1 Hydraulic Report Types

There are four types of hydraulic reports: Specialty Report, Type A, Type B, or a Hydraulic Summary. [Figure 1-3](#) provides guidance for selecting the report type; however the Region Hydraulics Engineer should be consulted for final selection.

Type of Report	Description	Approval		PE Stamp
		Region	HQ	
Specialty ^{1, 2}	Projects with any of the following components: <ul style="list-style-type: none"> • Culverts greater than 48 inches in diameter³ • Bridge • Fish Passage • Bank Protection • River structures (e.g. barbs, ELJ, levees) • Channel realignment/modifications • Any fills in floodplain or floodway • Pump stations 		X	X ⁵
A ¹	Projects with any of the following components: <ul style="list-style-type: none"> • Over 5,000 sq. ft. of new impervious surface is added • Storm sewer systems that discharge into a stormwater treatment facility 	X ⁶		X
B ^{1, 4}	Projects with any of the following components: <ul style="list-style-type: none"> • Culverts less than or equal to 48 inches in diameter³ • Less than or equal to 5,000 sq. ft. of new impervious surface is added • Storm sewer systems with 10 or less hydraulic structures, that don't discharge into a stormwater treatment facility • Paving/Safety Restoration and Preservation Projects 	X		X

1. For Design Build Projects, the identified approving Hydraulics Engineer shall be involved in developing the scope and the Request for Proposal (RFP). The identified approving Hydraulics Engineer shall have rejection authority as per the Request for Proposal (RFP) of both conceptual and final design.
2. A Specialty Report may be waived with approval from Headquarters Hydraulics.
3. Type of report also applies to culvert extensions of the size noted.
4. At the Region Hydraulic Engineer's discretion smaller projects may replace a Type B report with a Hydraulic Summary, contact the Region Hydraulic Engineer for an example.
5. PE Stamp shall be either by Headquarters Hydraulics or by a licensed engineer approved by Headquarters Hydraulics.
6. Headquarters review and concurrence is required except where delegation of authority has been granted to the Region. Consult the Region Hydraulic Engineer to determine whether Headquarters review and concurrence is required.

Hydraulic Report Selection Table
Figure 1-3

1-3.2 Writing a Hydraulic Report

This section contains guidance for developing a hydraulic report.

- **Hydraulic Report Outline** – A hydraulic report outline has been developed as a starting point for PEOs and is located in [Appendix 1-3](#). Use of the outline is not mandatory. However, organizing reports in the outline format may expedite the review process. Since some regions have modified the outline to meet specific region needs and or requirements, PEOs should contact their Region Hydraulic Engineer to determine the correct outline before starting a report. Once the relevant outline is selected, it is recommended that PEOs read through the outline and determine which sections are applicable to the project and delete those that are not. Both the region or HQ Hydraulic Offices can be contacted for assistance in preparing a hydraulic report.
- **Hydraulic Report Contents** – Regardless of whether or not the hydraulic report outline format is followed, the hydraulic report should contain the elements described in the outline and on the hydraulic report Review Checklist, see [Appendix 1-4](#). PEOs should provide a well-organized report such that an engineer with no prior knowledge of the project could read and fully understand the hydraulic/hydrologic design of the project. The report should contain enough information to allow someone else to reproduce the design in its entirety, but at the same time PEOs should be brief and concise, careful not to provide duplicate information that could create confusion.
- **Referencing the Hydraulics or *Highway Runoff Manual M 31-16*** – Copying sections of either the *Hydraulics Manual* or HRM is discouraged as it only adds additional bulk to the hydraulics report that is not necessary. Instead PEOs should reference the sections used in the design in the written portion of the hydraulics report. If the PEO deviates from either manual, the PEO must clearly state why a deviation was necessary and document all the steps used in the analysis in the written portion of the hydraulics report.
- **Deviations to the Hydraulics or *Highway Runoff Manual M 31-16*** – Deviations from either manual require approval prior to submitting a hydraulic report for review. For deviations from the *Hydraulics Manual*, approval is required by the State Hydraulic Engineer. Requests for a deviations should go through the Region Hydraulic Engineer to the HQ Hydraulics engineering staff. For deviations from the HRM, approval is required by the Demonstrative Approach Team (DAT) using the Engineering Economic Feasibility Checklist (see Appendix 2A of the HRM).
- **Design Tools and Software** – Whenever possible the design tools and programs described in this manual and in the HRM should be utilized. To determine if software and/or design tools are recommended, PEOs should review [Section 1-4](#) or check the expanded list on the HQ Hydraulics web page at the following link: www.wsdot.wa.gov/Design/Hydraulics/ProgramDownloads.htm. If a PEO wishes to use a design tool or software other than those that are recommended, they must request approval by 10 percent milestone for the hydraulic report, see [Appendix 1-4](#).

- **Contract or Scope of Work** – Project offices should use caution when referencing the hydraulic report outline in contracts or scope of work for consultants. Never contract or scope a consultant to only finish or complete the outline. The consultant should use the hydraulic report outline to develop the hydraulic report per the *Hydraulics Manual* and the hydraulic report shall address all of the applicable Minimum Requirements per the *Highway Runoff Manual* M 31-16. Please contact the Region and/or HQ Hydraulics Engineer to review the contract or scope prior to hiring a consultant.

1-3.3 Hydraulic Report Submittal and Archiving

Hydraulic reports should be submitted to the approving authority as follows:

- **Review Copies** – PEOs should submit a complete hard copy of the hydraulic report to the appropriate approving authority (region and/or HQ Hydraulics, see [Figure 1-3](#)) for review. To ensure the most efficient hydraulic report review, designers should follow Hydraulic Review Process outlined in [Section 1-5](#) and shown in [Figure 1-5](#). Final approval of a hydraulic report is granted once the report complies with both the *Hydraulics Manual* and *Highway Runoff Manual* M 31-16 and all reviewer comments are satisfactorily addressed.
- **Final Copies** – Upon approval, two paper copies and three CD copies of the report, and the original approval letter shall be sent to the offices noted below. CD copies should include the entire contents of the hydraulic report (including the appendices files) in PDF format as well as all program files or electronic design tool files. It is recommended that a summary of the CD contents be included, with each file name and purpose clearly stated.
 1. Send one CD and one paper copy of the hydraulic report to the Construction Office for reference during construction.
 2. Send one CD and one paper copy to the Region Hydraulic Engineer to be kept in a secure location as the record of copy for 10 years.
 3. Send one CD copy of the hydraulic report to the HQ Hydraulics Office. The HQ Hydraulics will retain this copy for at least 10 years.
 4. The original approval letter should be archived with the Design Documentation Package (DDP).

The 10-year time line begins after construction is complete. However, WSDOT employees are directed to preserve electronic, paper, and other evidence as soon as they are aware of an incident that may reasonably result in an injury, claim, or legal action involving the department per WSDOT Secretary's Executive Order E 1041 (wwwi.wsdot.wa.gov/docs/OperatingRulesProcedures/1041.pdf). In some instances, this may extend beyond the 10-year retention time.

1-3.4 Hydraulic Report Revisions and Supplements

At times, a hydraulics report may need to be revised due to various elements within a proposed project. There are two ways to submit a change:

1. **Revision** – A revision is a correction to the existing report either due to an error or omitted design documentation. The PEO should submit the revision along with a new title page, stamped, and signed by the project engineer with the same date or later as the revision.
2. **Supplement** – A supplement is a change that was not part of the original scope of work. The same approval process is required as with the original report. However the supplement should be a stand-alone document that references the original report. The supplement should indicate what the existing design was and how the existing design has changed as well as describe why the change was necessary.

Either type of change should be included in a submittal package with the changes clearly documented as well as supporting analysis and data including: any revised plans, calculations, and other updates as warranted to support the change. The package should be submitted to the approving authority following the guidance in [Section 1-3.3](#) and as shown on Figure 1-5.

1-3.5 Hydraulic Reports and Design Build Project

Design build projects present unique challenges and as such PEOs should coordinate the hydraulic design with both the Region and/or HQ Hydraulic Engineer throughout the project. In addition to the guidance in this manual and the [Highway Runoff Manual](#) M 31-16, PEOs should also consult the *Guidebook for Design-Build Highway Project Development* at the following web site:

www.wsdot.wa.gov/projects/delivery/designbuild/.

1-3.6 Developers and Utility Agreements

Developers, external agencies, utilities, etc., designing stormwater facilities within WSDOT right of way (ROW), shall assume the same responsibility as the PEO and prepare hydraulic reports in compliance with the policy outlined in Chapter 1 of this manual. Additionally, pipes and stormwater treatment features (bioswale, pond, etc.) on WSDOT ROW are considered utility structures. Therefore, anytime such a feature is located on WSDOT ROW, a utility permit will be required. For more information on utility permits, PEOs should consult the [Utilities Manual](#) M 22-87, the [Agreements Manual](#) M 22-99, and/or the [Development Services Manual](#) M 3009.

1-4 Storm Frequency Policy and Recommended Software/Design Tools

Ideally every hydraulic structure would be designed for the largest possible amount of flow that could ever occur. Unfortunately this would require unusually large structures and would add an unjustifiably high cost to the projects; therefore hydraulic structures are analyzed for a specific storm frequency. When selecting a storm frequency for design purposes, consideration is given to the potential degree of damage to the roadway and adjacent property, potential hazard and inconvenience to the public, the number of users on the roadway, and the initial construction cost of the hydraulic structure.

The way in which these factors interrelate can become quite complex. WSDOT policy regarding design storm frequency for typical hydraulic structures has been established so the PEO does not have to perform a risk analysis for each structure on each project. The design storm frequency is referred to in terms of mean recurrence interval (MRI) of precipitation. [Figure 1-4](#) lists the recommended MRIs for design of hydraulic structures. Based on past experience, these will give acceptable results in most cases. Occasionally the cost of damages may be so great, or the level of services using the roadway may be so important, that a higher MRI is appropriate. Good engineering judgment must be used to recognize these instances and the design should be modified accordingly. In high-risk areas a statistical risk analysis (benefit/cost) may be needed to arrive at the most suitable frequency.

MRI is the average number of years between storms of a given intensity. It can also be viewed as the reciprocal of the probability that such an event will occur in any one year. For example, a peak flow having a 25-year recurrence interval has a 4 percent ($1/25$) probability of being equaled or exceeded in any future year. A peak flow having a 2-year recurrence interval has a 50 percent ($1/2$) probability of being equaled or exceeded in any future year. The greater the MRI, the lower the probability that the event could occur in any given year.

It is important to keep in mind that MRI does not indicate that events occur on a time schedule. MRI cannot be used to predict time of occurrence. Each event is independent of all others, so the chance that a 25-year peak flow will occur in any year given remains the same regardless of what flows occurred last year. The correct way to view MRI is that it predicts the average occurrence of events over an extended period of time. For example, a 25-year peak discharge is expected to be equaled or exceeded 4 times in 100 years.

[Figure 1-4](#) also lists hydrology methods and recommended software and design tools. A more detailed discussion of the hydrology methods can be found in [Chapter 2](#). Copies of the software or design tools can be found on the HQ Hydraulics web page at the following link:

www.wsdot.wa.gov/Design/Hydraulics/ProgramDownloads.htm

Type of Structure	MRI (Years) ¹	Hydrology Method	Recommended Design Tools and Software ⁴
Gutters	10	Rational	Inlet Spreadsheet
Storm Drain Inlets <ul style="list-style-type: none"> • On longitudinal slope • Vertical curve sag 	10 50	Rational Rational	Inlet Spreadsheet Sag Spreadsheet
Storm Drains <ul style="list-style-type: none"> • Laterals • Trunk lines 	25 25	SBUH/SCS	StormShed or Storm Drain Spreadsheet ⁵
Ditches ²	10	SBUH/SCS	StormShed
Standard Culverts <ul style="list-style-type: none"> • Design for HW/D ratio³ • Check for high flow damage 	25 100	Published flow records, Flood reports (FIS), USGS Regression, or Rational Method	HY-8 or HEC-RAS
Bottomless Culverts <ul style="list-style-type: none"> • Design for HW depth³ 	100	Same as standard culverts (except rational method)	HY-8 or HEC-RAS
Bridges <ul style="list-style-type: none"> • Design for flow passage and foundation scour • Check for high flow damage 	100 500	Same as standard culverts (except rational method)	HEC-RAS (1D) or FESWMS (2D)
Stormwater Best Management Practices (BMPs)		See HRM	MGSFlood WWA StormShed EWA

¹See Appendix 4C of HRM for further guidance on selecting design storms.

²More design guidance for roadside ditches can be found in Section 4-3.

³For temporary culvert design see Section 3-3.1.1.


⁴If a different method or software is selected other than those noted, the reason for not using the standard WSDOT method should be explained and approved as part of the 10 percent submittal. The following web link contains a detailed description of all current programs and design tools recommended by WSDOT.

(www.wsdot.wa.gov/Design/Hydraulics/ProgramDownloads.htm)

⁵Must obtain prior approval from Region Hydraulic Engineer in order to use this method for designing storm drains.

Design Frequency for Hydraulic Structures

Figure 1-4

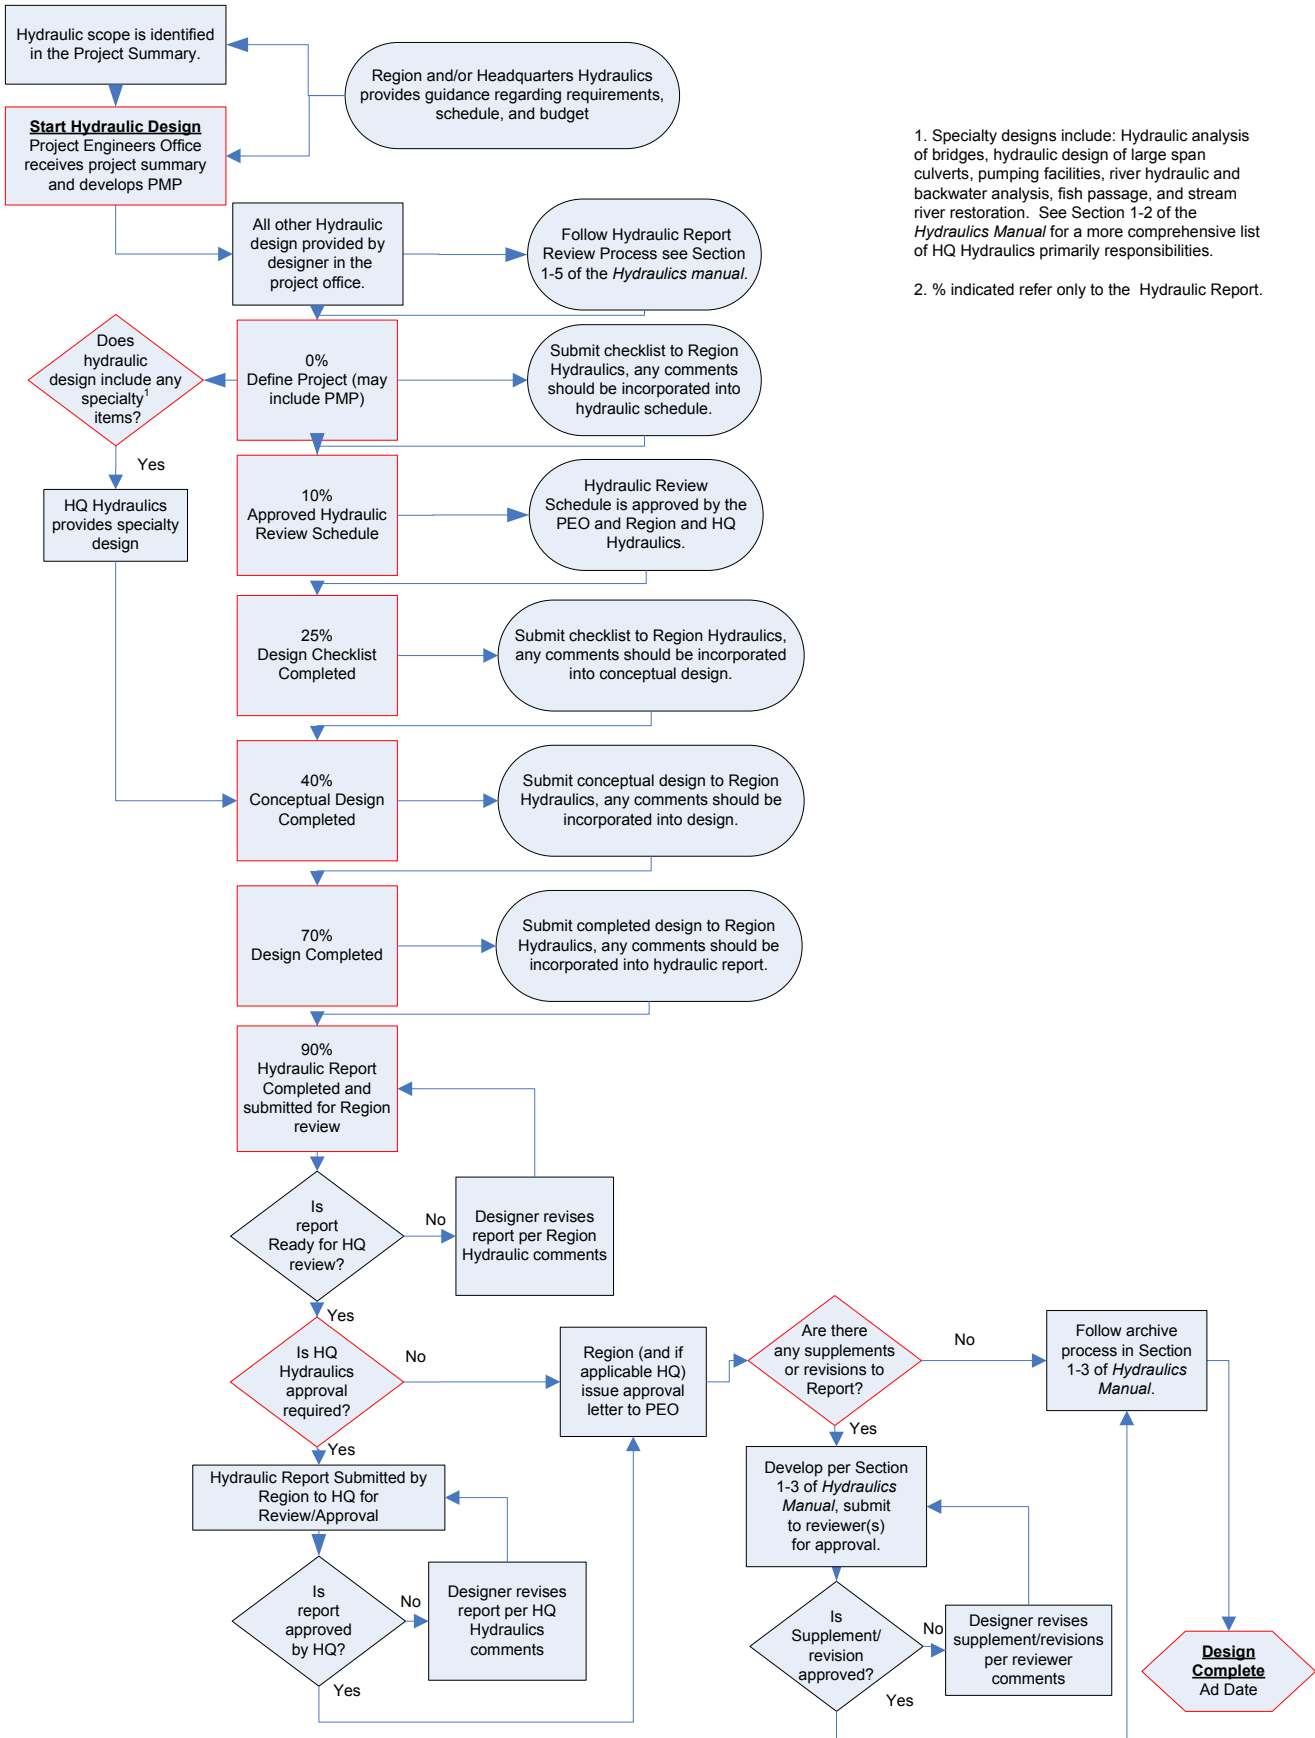

1. Specialty designs include: Hydraulic analysis of bridges, hydraulic design of large span culverts, pumping facilities, river hydraulic and backwater analysis, fish passage, and stream river restoration. See Section 1-2 of the *Hydraulics Manual* for a more comprehensive list of HQ Hydraulics primary responsibilities.

2. % indicated refer only to the Hydraulic Report.

1-5 Hydraulic Report Review Schedule

All hydraulic reports developed for WSDOT must be reviewed and approved by the State Hydraulic Engineer prior to the project advertisement date. The State Hydraulic Engineer has delegated approving authority to all HQ Hydraulic Engineers and to some Regional Administrators. Depending on the region, some hydraulic reports require two official reviews; one by the Region Hydraulic Engineer and one by HQ Hydraulics. PEOs should contact the Region Hydraulic Engineer to verify proper the region review process.

To help facilitate an efficient design and review process, a hydraulic report review process has been developed. The review will consist of several checkpoints or milestones of the design as it is being developed, followed by a complete review of the report. The purpose of the milestones is to ensure communication between the PEO, region and/or HQ Hydraulics, as well as other internal and/or external stakeholders during the hydraulic design. Each prescribed milestones is considered complete when the corresponding checklist (see [Appendix 1-4](#)) is completed, along with deliverables, and submitted to the region hydraulic reviewer(s). For milestones 0 through 70 percent, any comments by the Region Hydraulic Engineers, unless otherwise indicated, should be addressed by the next milestone. The process is illustrated in Figure 1-5 and each milestone is further described below.

- **0 Percent – Define Project** – Prior to starting the design, information regarding the project definition should be collected and all stakeholders for the hydraulic design should be identified. Additionally any specialty design should be identified and HQ Hydraulics contacted for design schedules and requests as appropriate.
- **10 Percent – Approved Hydraulic Review Schedule** – The goal of this milestone is to meet with all the stakeholders (identified at 0 percent), collect preliminary site data, identify design tools, and develop an approved hydraulic report review schedule through the project management process (PMP).
- **25 Percent – Complete Design Planning Checklist** – At the completion of this milestone the PEO will have developed a plan regarding what hydraulic design work will be done as part of the project. Work completed at this milestone includes: TDA delineation(s), determination of the minimum requirements, develop a list of potential BMPs, any deviations and/or other agreements will also be acknowledged, verification of existing conditions completed, geotechnical testing, and ROW needs identified.
- **40 Percent – Develop a Conceptual Design** – Once the PEOs have planned the design, they should be able to conceptually develop a hydraulic design that will include: type, size, and location for each hydraulic feature. Any conflicts with utilities should be identified and any geotechnical testing and/or ROW needs should be finalized. The conceptual design should also be reviewed with the stake holders.

- **70 Percent – Design Completed** – At this milestone, the design of all the hydraulic features on the project should be completed. Calculations, draft plan sheets, and an outline hydraulic report should be submitted for review. Any deviations from the HRM or HM should be submitted for approval.
- **90 Percent – Hydraulic Report Approved by Region** – A draft copy of the entire hydraulic report (as listed on the hydraulic report outline) should be submitted to reviewer. The hydraulic report should be submitted with a memo from the PE or their assistant stating they have reviewed the report and believe the report meets the project objectives and is ready for final review.
- **95 Percent – HQ Hydraulics Approval** – If needed.
- **100 Percent – Hydraulic Report Archived** – The reviewer provides a final approval letter and the PEO follows the guidelines for archiving and submitting a final report as outlined in this chapter.

1-5.1 Milestones and Scheduling

WSDOT has developed the Project Management and Reporting System (PMRS) to track and manage projects. Project Delivery Information System (PDIS) utilizes a master deliverables list (MDL) to identify major elements that occur during most projects. The MDL is intended to be a starting point for creating a work breakdown structure (WBS) and identifies specific offices the PEO should communicate with during the development of the project schedule. The current MDL identifies three options for hydraulics:

1. Type A Report
2. Type B Report
3. Hydraulic Summary
4. Specialty Design (see [Section 1-2 of Hydraulics Manual](#))

Regardless of the type of report, the milestones outlined above apply. At the 10 percent milestone all projects with hydraulic features should develop an approved hydraulic schedule. At a minimum the schedule should include the milestones with agreed upon dates by the project engineer's office, region Hydraulics, and HQ Hydraulics. [Figure 1-6](#) should be used as a starting place. For Primavera users, a template which includes the milestones is available on the HQ Hydraulics web page. (www.wsdot.wa.gov/Design/Hydraulics/default.htm)

%	Milestone	Project Alignment	Estimated Task Durations¹	Date of Completion
0%	Define project	Project definition complete MDL #320	TBD	
10%	Develop approved schedule		TBD	
25%	Design planning checklist complete	Design approved MDL #1685	TBD	
40%	Conceptual design complete	Complete prior to starting design	TBD	
70%	Design complete		TBD Once design is completed, allow four weeks for region review and comment.	
90%	Draft hydraulic report submitted for approval		Estimate six weeks for PEO to write and compile report contents. Once report is completed, allow eight weeks for region review, comments, and resolution of comments by PEO.	
95%	Region review completed, hydraulic report submitted to HQ Hydraulic for review	Complete prior to PS&E approval	Once submitted to HQ hydraulics, allow four weeks for review, comment, and resolution of comments by PEO.	
	Revisions and supplements	Complete prior to hydraulic report archive	TBD	
100%	Hydraulic report archived	Complete prior to project design approval	TBD	

¹Allow additional time for projects submitted around major holidays.

Hydraulic Report Review Schedule
Figure 1-6

Appendix 1-1

Conversion Table

English to Metric Conversions	English to English Conversions	Metric to Metric Conversions
Length		
1 inch 1 foot 1 mile 1 yard	1 mile 1 yard	1 centimeter = 10 millimeters 1 meter = 100 centimeters 1 kilometer = 100 meters
Area		
1 square inches 1 square feet 1 acres 1 square miles	1 acre (acre ft) 1 sq. mile 1 sq. mile	1 sq. centimeter = 100 sq. millimeters 1 sq. meter = 10000 sq. centimeters 1 hectare = 10,000 sq. meters 1 square kilometer = 1000000 sq. meters
Volume		
1 ounce 1 gallon 1 cubic foot 1 acre-foot	1 cubic foot 1 acre-foot	1 cubic centimeter = 1000 cubic millimeters 1 cubic meter = 1000000 cubic centimeters 1 cubic meter = 1000 liters
Flowing Water Rates		
1 cubic foot/second 1 cubic foot/second	1 cubic foot/second = 448.83 gallons/minute 1 cubic foot/second = 0.646 million gal./day 1 cubic foot/second = 1.984 acre-foot per day	
Pressure		
1 pound force 1 pound force/sq.in 1 foot of water 1 atmosphere	1 foot of water 1 foot of water 1 atmosphere 1 atmosphere	= 0.433 pounds/square in. = 62.4 pounds/square ft. = 14.70 pounds/square in. = 33.94 feet of water
Mass		
1 ounces 1 pounds	1 ton	1 kilogram = 1000 grams 1 tonne = 1000 kilograms
Temperature		
°F	N/A	N/A

Appendix 1-3

Hydraulic Report Outline

www.wsdot.wa.gov/NR/rdonlyres/BF1571B9-A814-4E50-B3C2-F199BEA9A3B3/0/HROutline.pdf

Appendix 1-4

Hydraulic Report Checklist

www.wsdot.wa.gov/Design/Hydraulics/default.htm

