

# DRAFT WSDOT PAVEMENT POLICY

JANUARY 2010



**Washington State Department  
of Transportation**

**Environmental and Engineering Programs Division**  
State Materials Laboratory Pavements Division  
P.O. Box 47365  
Olympia, WA 98504-7365

# TABLE OF CONTENTS

<b>1. PURPOSE</b> .....	<b>1</b>
1.1 GENERAL .....	1
1.2 RELATIONSHIP TO WSDOT DESIGN MANUAL .....	1
<b>2. INTRODUCTION</b> .....	<b>2</b>
2.1 BASIC ELEMENTS .....	2
2.2 PURPOSE OF SURFACING AND BASE COURSES .....	2
2.3 FROST ACTION .....	2
<b>3. PAVEMENT DESIGN CONSIDERATIONS</b> .....	<b>3</b>
3.1 DESIGN PERIOD .....	3
3.2 TRAFFIC .....	3
3.3 SUBGRADE SOILS .....	4
<b>4. PAVEMENT TYPE SELECTION</b> .....	<b>5</b>
4.1 APPLICATION OF PAVEMENT TYPE SELECTION .....	5
4.2 SUBMITTAL PROCESS .....	6
<b>5. NEW PAVEMENT DESIGN</b> .....	<b>8</b>
5.1 DESIGN PROCEDURES .....	8
5.2 DETERMINATION OF FLEXIBLE PAVEMENT LAYER THICKNESSES .....	8
5.2.1 Introduction .....	8
5.2.2 Mainline Roadway .....	8
5.2.3 Ramps, Frontage Roads, and Weigh Stations .....	12
5.2.4 Rest Areas .....	12
5.2.5 Shoulders .....	12
5.3 DETERMINATION OF RIGID PAVEMENT LAYER THICKNESSES .....	13
5.3.1 Introduction .....	13
5.3.2 Mainline Roadways .....	14
5.3.3 PCC Intersections and Roundabouts .....	14
5.3.4 Ramps, Frontage Roads, and Weigh Stations .....	14
5.3.5 Rest Areas .....	14
5.3.6 Shoulder Construction .....	15
5.3.7 Dowel Bar Selection .....	16
<b>6. PAVEMENT REHABILITATION</b> .....	<b>17</b>
6.1 BASIC ELEMENTS .....	17
6.2 DEFLECTION SURVEY .....	17
6.3 DESIGN PERIOD .....	17
6.4 TRAFFIC DATA .....	18
6.5 OTHER PAVEMENT ISSUES .....	18
6.5.1 General .....	18
6.5.2 Flexible Pavements .....	19
6.5.3 Bituminous Surface Treatment Pavements .....	23
6.5.4 Portland Cement Concrete Pavements .....	24
<b>7. PAVEMENT REHABILITATION REPORT</b> .....	<b>26</b>
7.1 GENERAL .....	26
7.2 GEOLOGY .....	26
7.3 PAVEMENT CONDITION .....	26
7.4 DRAINAGE AND WATER CONDITIONS .....	26
7.5 PAVEMENT LAYER PROFILE .....	27
7.6 MATERIALS .....	27
7.7 CONSTRUCTION CONSIDERATIONS .....	27

7.8	SPECIAL FEATURES .....	27
7.9	PAVEMENT DESIGN .....	27
7.10	STATE MATERIALS LABORATORY PAVEMENT DIVISION REPORT .....	28
7.11	OVERLAY DESIGN PROCEDURES .....	28
7.11.1	HMA Overlays .....	28
7.11.2	Granular Overlays (Cushion Courses) .....	28
7.11.3	PCC Overlays .....	28
7.11.4	Dowel Bar Retrofit, Panel Replacement, and Diamond Grinding.....	29
7.12	DETERMINATION OF OVERLAY THICKNESSES.....	29
7.12.1	HMA Overlays — Structural .....	29
7.12.2	HMA Overlays — Nonstructural .....	29
7.12.3	Minimum Lift Thickness .....	29
7.12.4	Granular Overlay .....	29
7.12.5	PCC Overlay .....	30
<b>REFERENCES.....</b>		<b>31</b>
<b>APPENDIX 1 – PAVEMENT TYPE SELECTION CRITERIA .....</b>		<b>32</b>
<b>APPENDIX 2 – DOWEL BAR TYPE SELECTION .....</b>		<b>46</b>
<b>APPENDIX 3 – EXAMPLE PAVEMENT TYPE SELECTION REPORT .....</b>		<b>49</b>
<b>APPENDIX 3-A – PAVEMENT DESIGN .....</b>		<b>59</b>
<b>APPENDIX 3-B – DOCUMENTATION FOR HMA PERFORMANCE LIFE.....</b>		<b>61</b>
<b>APPENDIX 3-C – COST ESTIMATES .....</b>		<b>63</b>
<b>APPENDIX 3-D – LCCA WORKSHEETS .....</b>		<b>69</b>
<b>APPENDIX 4 – WSDOT PROBABILISTIC INPUTS.....</b>		<b>77</b>
<b>APPENDIX 5 – PROBABILISTIC ANALYSIS EXAMPLE.....</b>		<b>80</b>
<b>APPENDIX 6 – PROJECT SPECIFIC DETAILS ITEMS FOR CONSIDERATION .....</b>		<b>91</b>
<b>APPENDIX 7 – WSDOT PAVEMENT TYPE SELECTION COMMITTEE .....</b>		<b>93</b>

## **1. PURPOSE**

### **1.1 GENERAL**

This guide is the product of WSDOT pavement experience, research findings (state, national and international) and various analyses. The manual will be of value to Region and Headquarters (HQ) personnel in designing and evaluating pavement structures as well as local agencies.

### **1.2 RELATIONSHIP TO WSDOT DESIGN MANUAL**

Pavement design information previously contained in the Design Manual is largely replaced by this document. Refer to Division 6 of the Design Manual for any additional pavement related information.

## **2. INTRODUCTION**

### **2.1 BASIC ELEMENTS**

The basic element of the pavement structure includes three courses: surface, base (stabilized or unstabilized) and subbase (as required). Pavement structures are divided into two general classifications: flexible and rigid. Flexible pavements have some type of bituminous surface and rigid pavements have a surface layer of portland cement concrete (PCC).

### **2.2 PURPOSE OF SURFACING AND BASE COURSES**

The surface, base and subbase courses are layers of high stiffness and density. Their principal purpose is to distribute the wheel load stresses within the pavement structure and thus protect the subgrade soils against excessive deformation or displacement.

### **2.3 FROST ACTION**

Greater depths of base or selected free-draining borrow materials are usually necessary in areas where frost action is severe or the subgrade soil is extremely weak. The total depth of the pavement structure is extremely important in high frost penetration areas. Additional thickness of non-frost susceptible base or subbase materials has been effectively used to combat this problem. An effective measure is to have the pavement structure (total of surface and base courses) equal at least one-half the maximum expected depth of freeze when the subgrade is classified as a frost susceptible soil. The depth of freeze is based on the design freezing index (30 year temperature record) or measurements made by WSDOT during the severe winter of 1949-1950. That winter was the most severe as to depth of freeze during the past 60 years.

### 3. PAVEMENT DESIGN CONSIDERATIONS

#### 3.1 DESIGN PERIOD

The design period is the time from original construction to a terminal condition for a pavement structure. AASHTO essentially defines design period, design life and performance period as being the same terms. AASHTO defines an analysis period as the time for which an economic analysis is to be conducted. Further, the analysis period can include provisions for periodic surface renewal or rehabilitation strategies which will extend the overall service life of a pavement structure before complete reconstruction is required.

The design period used by WSDOT is chosen so that the design period traffic will result in a pavement structure sufficient to survive through the analysis period. It is recognized that intermittent treatments will be needed to preserve the surface quality and ensure that the structure lasts through the analysis period. The required design period for all WSDOT highways is shown in Table 3.1.

**Table 3.1 Required Design Period for New or Reconstructed Highways**

Highway Description	Design Period
All WSDOT highways	50 years

The 50 year design period can be reduced for unique, project specific conditions such as temporary HOV lane pavements, future planned realignment or grade changes, etc.

Doubling the design period equivalent single axle loads (ESALs) adds about one inch of HMA or PCC to the required initial structural thickness of a flexible or rigid pavement design. As such, modest increases in pavement thickness can accommodate significantly increased traffic as characterized by ESALs.

#### 3.2 TRAFFIC

The volume and character of traffic, expressed in terms of 18,000 lb equivalent single axle loads (ESALs), is a measure of the traffic loading experienced by a pavement. for structural design purposes strongly influences pavement structural requirements. Both flexible and rigid

pavement structures can be designed to meet any ESAL requirement; however, this does not imply similar maintenance and rehabilitation requirements.

### **3.3 SUBGRADE SOILS**

The characteristics of native soils directly affect the pavement structure design. A careful evaluation of soil characteristics is a basic requirement for each individual pavement structure design.

Resilient modulus is the primary material input into the *AASHTO Guide for Design of Pavement Structures* (1993), as well as the WSDOT HMA overlay design procedure.

## 4. PAVEMENT TYPE SELECTION

There are three primary areas that need to be addressed to select a pavement type: pavement design analysis, life cycle cost analysis, and project specific details. Each of these areas can have a significant impact on the selected pavement type and requires a detailed analysis. The overall process is shown in Figure 4.1. The specific requirements for each step are explained in Appendix 1.

Pavement type selection is applicable to all new alignment, ramps, collector-distributors, acceleration-deceleration lanes, and existing pavement reconstruction on interstate, principal arterials, and any other roadway that may benefit from this analysis. Pavement type selection is not necessary for BST surfaced roadways. For mainline widening, if the selected pavement type is the same pavement type as the existing, then a pavement type selection is not required. When comparing life cycle costs of the different alternatives, the comparison must be based on the total costs, which include initial construction, maintenance, rehabilitation, and user costs.

Following completion of a LCCA, pavement type alternatives shall be considered equal if total costs (including user costs) do not differ by more than 15 percent.

### 4.1 APPLICATION OF PAVEMENT TYPE SELECTION

The following is a list of considerations for new construction or reconstruction of mainline, ramps, collector-distributors, acceleration-deceleration lanes, and intersections.

- **Mainline new and reconstructed.** A pavement type selection must be completed on all mainline pavements that are more than ½ lane mile in length or more than \$0.5 million except those highways designated as having a BST surface. For roadway segments shorter in length or lower in cost, the State Materials Laboratory Pavements Division should be contacted for further direction on the need to conduct a pavement type selection.
- **Ramps.** Both PCC and HMA should be considered for ramps with mature geometrics (where lane configuration or right of way restricts the expansion of the roadway footprint), high traffic and high truck percentages.
- **Collector-Distributors.** Collector-distributors should be designed similar to ramps above.
- **Acceleration-Deceleration Lanes.** Treat the same as collector-distributors.

- **Intersections.** Most intersections will not require an analysis separate from the rest of the highway. However, intersections with chronic rutting should be examined in detail to determine the nature and cause of the rutting and whether alternate pavement types should be considered. The State Materials Laboratory Pavements Division should be contacted for further guidance and direction on options for resolving chronic intersection rutting issues.

#### **4.2 SUBMITTAL PROCESS**

The pavement type selection, including all applicable subsections (pavement design analysis, cost estimate and life cycle cost analysis, including the results of the RealCost evaluation [RealCost is LCCA software developed for and maintained by the FHWA], all applicable RealCost input files and project specific details) shall be submitted electronically to the Pavement Design Engineer at the State Materials Laboratory Pavements Division. The pavement type selection analysis shall be reviewed and distributed to the Pavement Type Selection Committee (Appendix 1) for approval. The report submittal shall include detailed explanation of the various applicable items, as those outlined above, that supports the selection of the recommended pavement type.

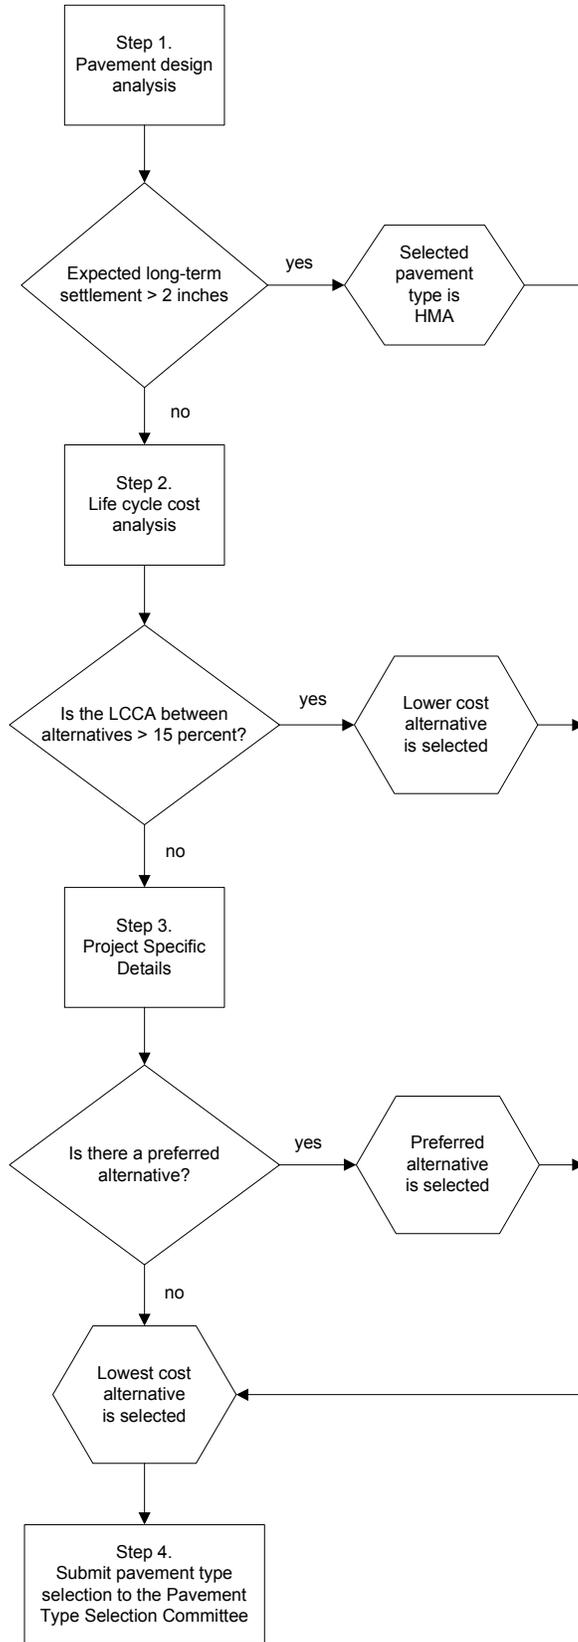


Figure 4.1. Pavement Type Selection Flow Chart

## **5. NEW PAVEMENT DESIGN**

### **5.1 DESIGN PROCEDURES**

"New pavement design" shall include reconstructed as well as new pavement structures.

The primary design procedure for pavement structures is the AASHTO Guide for Design of Pavement Structures (1993). The Mechanistic-Empirical Pavement Design Guide (MEPDG version 1.0) is at an early stage of use by WSDOT but was used in the development of the design tables which follow. Minimum layer thicknesses as well as maximum lift thicknesses are controlled by requirements contained within WSDOT's Standard Specifications for Road, Bridge, and Municipal Construction (which also describes other pavement material requirements such as grading, fracture, cleanliness, etc.).

### **5.2 DETERMINATION OF FLEXIBLE PAVEMENT LAYER THICKNESSES**

#### **5.2.1 INTRODUCTION**

Layer thicknesses and total pavement structure over subgrade soils for flexible pavements are based on four criteria:

- Depth to provide a minimum level of serviceability for the design period,
- Depth to prevent excessive rutting,
- Depth to prevent premature fatigue cracking of the HMA layers, and
- Depth to provide adequate frost depth protection.

#### **5.2.2 MAINLINE ROADWAY**

The structural design of mainline flexible pavements can be broadly divided into those with fewer than 1,000,000 ESALs for the design period and those greater than 1,000,000 ESALs. Those pavements with ADT less than 5,000 are classified as low volume roadways and shall be considered for a bituminous surface treatment wearing course over CSBC. For pavements with higher ESAL and ADT levels, a HMA surface shall be considered. Table 5.1 provides typical layer thicknesses for HMA surfaced flexible pavements for ESAL levels up to 200 million. The flexible structural design thicknesses provided in Table 5.1 assumes a subgrade modulus of 10,000 psi which is typical of most WSDOT roadways. Table 5.1 also shows PCC slab and base thicknesses for convenience (see Section 5.3 for specifics about rigid pavement design). Flexible structural designs other than those shown in Table 5.1 can be used if justified by use of

job specific input values in the AASHTO Guide for Design of Pavement Structures (1993). Table 5.2 provides commentary about the assumptions and input values used to develop Table 5.1. Other input values used by Region personnel must be approved by the State Materials Laboratory Pavements Division.

Table 5.3 provides typical layer thicknesses for flexible pavements with design ESAL levels of 1,000,000 or less. The bituminous surface treatment (BST) surface course is considered the most economical choice for low ESAL pavements.

**Table 5.1. Flexible and Rigid Pavement Layer Thicknesses for New or Reconstructed Pavements**

Design Period ESALs	Layer Thicknesses, ft.				
	Flexible Pavement		Rigid Pavement		
	HMA	CSBC Base	PCC Slab	Base Type and Thickness	
≤ 5,000,000	0.50	0.50	0.67	CSBC only	0.35
5,000,000 to 10,000,000	0.67	0.50	0.75	HMA over CSBC	0.35 + 0.35
10,000,000 to 25,000,000	0.75	0.50	0.83	HMA over CSBC	0.35 + 0.35
25,000,000 to 50,000,000	0.92	0.58	0.92	HMA over CSBC	0.35 + 0.35
50,000,000 to 100,000,000	1.00	0.67	1.00	HMA over CSBC	0.35 + 0.35
100,000,000 to 200,000,000	1.08	0.75	1.08	HMA over CSBC	0.35 + 0.35

**Table 5.2. Commentary for Pavement Design Assumptions and Inputs for Table 5.1.**

<p><b>Design Procedures:</b> Two design procedures were used to develop Table 5.1 along with results from national and international studies. The primary procedure used was the AASHTO Guide for Design of Pavement Structures (1993). The secondary procedure was the MEPDG (version 1.0).</p>
<p><b>Flexible Pavement Assumptions:</b> The assumptions used in AASHTO 93 for flexible pavement design included: <math>\Delta PSI = 1.5</math>, <math>S_o = 0.5</math>, <math>m = 1.0</math>, <math>a_{HMA} = 0.44</math>, <math>a_{CSBC} = 0.13</math>, and <math>M_R = 10,000</math> psi, and <math>E_{base} = 30,000</math> psi. Thicker CSBC layers may be required for frost design. Recent work performed at the National Center for Asphalt Technology suggests for HMA thicknesses greater than 5 inches, a <math>a_{HMA} = 0.54</math> can be used.</p>
<p><b>Rigid Pavement Assumptions:</b> The assumptions used in AASHTO 93 for rigid pavement design included: <math>J = 3.2</math> (dowels), <math>S_o = 0.4</math>, <math>E_C = 4,000,000</math> psi, <math>C_d = 1.0</math>, <math>\Delta PSI = 1.5</math>, <math>S_C = 700</math>psi, <math>k = 200</math> pci (CSBC is the only base), <math>k = 400</math> pci (HMA base paved over CSBC).</p>
<p><b>Base Layers for PCC:</b> For ESAL levels <math>\leq 5,000,000</math>, it is assumed PCC slabs will be placed on CSBC. For higher ESAL levels, PCC slabs will be placed on HMA base (0.35 ft thick) over CSBC base (minimum of 0.35 ft thick). Thicker CSBC layers may be required for frost design.</p>
<p><b>Subgrade Modulus for Flexible Pavements:</b> For flexible pavements a subgrade resilient modulus of 10,000 psi was used. This is a reasonable assumption based on prior laboratory and field tests statewide. Higher subgrade moduli can be achieved but generally only with granular, low fines materials or some type of subgrade stabilization. It is critical that all WSDOT pavement structures be constructed on well-designed and constructed subgrades.</p>
<p><b>Reliability Levels:</b> A reliability level of 85% was used in AASHTO 93 for ESAL levels of 1,000,000 to 5,000,000. A reliability level of 95% was used for ESAL levels of 10,000,000 and higher.</p>
<p><b>Other observations:</b></p> <ul style="list-style-type: none"> <li>• ESAL levels: For the ESAL levels in Table 5.1, the difference in HMA and PCC layer thicknesses are about 1.0 inch for each doubling of ESAL level.</li> <li>• By constructing or reconstructing flexible pavements on a stiffer subgrade (<math>&gt; 10,000</math> psi), reductions in the total HMA thickness can be made; however, this must be done by use of the approved design method (AASHTO 93).</li> <li>• Typically, surface renewal techniques for flexible pavements involves: (1) adding HMA thickness, or (2) planing the existing surface course and replacing with an equal thickness of HMA. PCC surface renewal involves diamond grinding which permanently reduces the PCC slab thickness.</li> </ul>

**Table 5.3. Flexible Pavement Layer Thicknesses for Low ESAL Levels and New or Reconstructed Pavements—BST Surfaced**

Design Period ESALs	Subgrade Condition	Required SN	Layer Thicknesses, <sup>1</sup> ft	
			Reliability = 75%	
			BST <sup>3</sup>	CSBC <sup>2</sup>
< 100,000	Poor	2.53	0.08	1.50
	Average	1.93	0.08	1.10
	Good	1.45	0.08	0.90 <sup>4</sup>
100,000-250,000	Poor	2.95	0.08	1.80
	Average	2.25	0.08	1.30
	Good	1.71	0.08	1.00
250,000-500,000	Poor	3.31	0.08	2.00
	Average	2.53	0.08	1.50
	Good	1.93	0.08	1.10
500,000-1,000,000	Poor	3.77	0.08	2.30
	Average	2.86	0.08	1.70
	Good	2.17	0.08	1.25

<sup>1</sup>AASHTO Guide for Design of Pavement Structures (1993) for flexible pavements and the following inputs:

- $\Delta PSI = 1.7$
  - $S_0 = 0.50$
  - $m = 1.0$
  - $a_{BST} = 0.20$   
(assumes  $E_{BST} = 100,000$  psi)
  - $a_{CSBC} = 0.13$
  - $SN = a_{BST} (1") + 0.13$  (CSBC)
  - Subgrade Condition (effective modulus)
    - Poor:  $M_R = 5,000$  psi
    - Average:  $M_R = 10,000$  psi
    - Good:  $M_R = 20,000$  psi
- (Note: Effective modulus represents the subgrade modulus adjusted for seasonal variation)

<sup>2</sup>GB may be substituted for a portion of CSBC when the required thickness of CSBC  $\geq 0.70$  ft. The minimum thickness of CSBC is 0.35 ft when such a substitution is made.

<sup>3</sup>Newly constructed BST assumed thickness = 0.08 ft

<sup>4</sup>CSBC thickness increased for a total pavement structure of approximately 1.00 ft based on moisture and frost conditions.

### 5.2.3 RAMPS, FRONTAGE ROADS, AND WEIGH STATIONS

Ramps shall be designed for the expected traffic.

Frontage roads and weigh stations that are maintained by WSDOT shall be designed in accordance with the AASHTO Guide for Design of Pavement Structures (1993). Frontage roads that counties and cities are to accept and maintain but constructed by WSDOT shall be designed to the standards of the accepting agency.

The total depth of the pavement section must be at least one-half of the maximum expected depth of freezing when the subgrade is classified as a frost susceptible soil. The depth of expected freeze can be based on calculations by use of the design freezing index or the field data gathered by WSDOT during the winter of 1949-1950.

### 5.2.4 REST AREAS

The minimum flexible pavement requirements for rest area roadways and parking areas are:

• Access Roads and Truck Parking	0.50 ft HMA 0.50 ft CSBC
• Car Parking	0.35 ft HMA 0.50 ft CSBC

Project specific traffic and subgrade soil conditions may require thicker pavement layers. Such designs shall be done in accordance with the AASHTO Guide for Design of Pavement Structures (1993). The total depth of the pavement section must be at least one-half of the maximum expected depth of freezing when the subgrade is classified as a frost susceptible soil.

### 5.2.5 SHOULDERS

The minimum requirements for flexible pavement shoulders are:

• Interstate	0.35 ft HMA 0.35 ft CSBC Variable depth of additional base*
• Non-Interstate	0.25 ft HMA 0.35 ft CSBC Variable depth of additional base*

\* The Gravel Base or CSBC shall extend to the bottom of the mainline base course.

Project specific traffic and subgrade soil conditions may require thicker pavement layers. Such designs shall be done in accordance with the AASHTO Guide for Design of Pavement Structures (1993).

The total depth of the pavement section must be at least one-half of the maximum expected depth of freezing when the subgrade is classified as a frost susceptible soil.

### **5.3 DETERMINATION OF RIGID PAVEMENT LAYER THICKNESSES**

The principal type of rigid pavement used by WSDOT in the past and which will be continued for the foreseeable future is a plain, jointed PCC pavement (with dowel bars).

All new construction, reconstruction and lane widening shall be conducted such that the concrete lane edges and the lane stripe are congruent.

#### **5.3.1 INTRODUCTION**

Based on the past performance of PCC pavement on the state route system under a variety of traffic conditions (various ESAL levels) and on city streets (such as the city of Seattle), it is advisable to use slab thicknesses of 0.67 feet or greater even if the ESAL levels would suggest that lesser slab thicknesses would be adequate. A slab thickness of 0.67 feet or greater provides some assurance of adequate long-term performance given that other design details are adequately accommodated. Past PCC pavement performance also suggests that rigid pavement can perform for 50 years or more with proper maintenance and rehabilitation activities.

In the past, base depths under rigid pavements were determined primarily by the requirement for support of construction traffic. Currently, it is recognized that the base course directly beneath PCC slabs is a critical element in the performance of PCC pavement. Previous to this Guide, asphalt treated base (ATB) was used to support construction traffic prior to placement of PCC pavement. WSDOT experience indicates degradation of the ATB material beneath various Interstate PCC pavements. For this reason, at a minimum for high traffic roadways, HMA base is required as the supporting layer for PCC slabs.

### 5.3.2 MAINLINE ROADWAYS

Table 5.1 provides layer thicknesses for rigid pavements for ESAL levels up to 200 million. The PCC thicknesses included in Table 5.1 are supported on granular or HMA base depending upon the ESAL level. Table 5.2 provides commentary about the assumptions and input values used to develop the rigid pavement layer thicknesses.

PCC slab thicknesses other than those shown in Table 5.1 can be used if justified by job specific input values used in the AASHTO Guide for Design of Pavement Structures (1993). Such input values must be approved by the State Materials Laboratory Pavements Division.

The total depth of the pavement section must be at least one-half of the maximum expected depth of freezing when the subgrade is classified as a frost susceptible soil.

### 5.3.3 PCC INTERSECTIONS AND ROUNDABOUTS

The same requirements apply as described in paragraph 5.2.2. Jointing details and specifics concerning roundabout construction should be discussed and approved by the State Materials Laboratory Pavement Division.

### 5.3.4 RAMPS, FRONTAGE ROADS, AND WEIGH STATIONS

The same requirements apply to rigid pavement ramps and frontage roads as for flexible pavements as noted in Paragraph 5.2.3.

### 5.3.5 REST AREAS

The minimum rigid pavement requirements for rest area roadways and parking areas are:

• Access Roads	0.75 ft PCC (doweled) 0.35 ft CSBC
• Truck Parking	0.67 ft. PCC (undoweled) 0.35 ft CSBC
• Car Parking	0.67 ft PCC (undoweled) 0.35 ft CSBC

Project specific traffic and subgrade soil conditions may require thicker pavement layers. Such designs shall be done in accordance with the AASHTO Guide for Design of Pavement Structures (1993).

The total depth of the pavement section must be at least one-half of the maximum expected depth of freeze when the subgrade is classified as a frost susceptible soil.

### **5.3.6 SHOULDER CONSTRUCTION**

The choice of HMA or PCCP shoulders for New Rigid pavement is dependent upon the future use of the roadway structure. Life cycle investments, not only present worth but also the initial capitalization costs must be considered and approved by the State Materials Lab Pavements Division. Future traffic in this context implies either diverted traffic or construction or the shoulder will become a primary lane of traffic at a future date.

#### 5.3.6.1 Shoulders Will Not Be Used For Future Traffic

Shoulders for this application are designed as flexible pavement. The approved shoulder designs include 0.35' of HMA over aggregate base. PCC placement placed adjacent to the right shoulder should be two feet wider than the lane and extend two feet into the right shoulder (See 6.5.4.4). This is an exception to the requirement that the concrete lane edge and lane stripe be congruent. The shoulders will utilize a dense graded HMA designed for ESALs less than 0.5 million, compacted to full density requirements (91 percent) when practical.

Usually, concrete shoulders will not be used under these conditions. If a concrete shoulder option is pursued, a life cycle cost analysis must be performed. The concrete shoulder pavement section must match the mainline thickness and be placed over granular base. Shoulder widths must follow the Design Manual requirements.

#### 5.3.6.2 Shoulders Will Be Used For Future Traffic

Shoulders for this application are designed in full depth HMA or PCC, built to match the mainline traffic lanes. These shoulders are constructed using the same full depth section as the mainline, with lane widths following the Design Manual requirements. PCC shoulders shall be tied together with deformed steel bars. The concrete placed on shoulders shall be placed concurrent with the outside lane. See also paragraph 6.5.4.5

### **5.3.7 DOWEL BAR SELECTION**

Newly constructed rigid pavements shall use corrosion resistant dowel bars consisting of stainless steel, MMFX-2 or Zinc clad options. Dowel bar selection criteria are detailed in Appendix 2.

## **6. PAVEMENT REHABILITATION**

### **6.1 BASIC ELEMENTS**

A pavement rehabilitation project deals with existing pavements that show obvious signs of distress or failure. As a result, the amount of data acquired for each pavement rehabilitation survey may vary in both quantity and detail, depending on the condition of the roadway and the amount of data on file, such as existing soils reports. The survey data is incorporated into the soil report where the scope of the project warrants a soil survey (that is, significant widening, cuts or fills). The survey includes pavement deflection data, descriptions and photographs of typical pavement conditions, road life history, pavement cores, base course and subgrade samples, and a review of drainage features. The survey shall be oriented toward analyzing the existing roadway conditions so that a reasonable definition of the special problems and structural needs of the roadway may be made.

### **6.2 DEFLECTION SURVEY**

A pavement deflection survey is performed on selected projects by the State Materials Laboratory Pavements Division. This survey shall be conducted before the rehabilitation report to aid the Region Materials Engineer in coring and sampling of each project. The deflection survey shall be conducted, when possible, either in late fall or early spring. The Region Materials Engineer shall coordinate with the State Materials Laboratory Pavements Division so that most of the deflection surveys are conducted during one time period each year. After conducting the deflection surveys, the State Materials Laboratory Pavements Division will report the results of the survey to the Region Materials Engineer.

### **6.3 DESIGN PERIOD**

The rehabilitation design period is the time from rehabilitation construction to a terminal condition. Designs for an HMA overlay will typically have a rehabilitation design period of 15 years, six to eight years for a BST, and 10 to 15 years for dowel bar retrofit. This rehabilitation design period can be changed, if needed, when justified by project specific conditions.

## **6.4 TRAFFIC DATA**

Traffic data from the Transportation Information and Planning Support (TRIP's) traffic file will be used on most projects, as contained in the Washington State Pavement Management System (WSPMS). Where the State Materials Laboratory Pavements Division or Region Materials Engineer believes the data in the file is not adequate, a special traffic count on the project can be requested to verify the data. If the region does not have personnel to conduct the traffic counts, the Transportation Data Office shall be contacted for assistance.

For HMA mix designs, the design ESAL calculation will be based on 15 years.

## **6.5 OTHER PAVEMENT ISSUES**

This section describes specific details of new pavement construction and rehabilitation.

### **6.5.1 GENERAL**

#### 6.5.1.1 Mainline Shoulders

Mainline shoulders shall be designed to the equivalent HMA or PCC and base depths as the mainline roadway. Consideration for a lesser depth will be given in rural areas or where shoulders will not become a future travelled lane.

#### 6.5.1.2 Pavement Widening

Roadway widening to accommodate HOV, truck climbing lane, or capacity improvements shall be constructed with like pavement of the mainline. Widening in kind will minimize potential surface irregularities between adjacent lanes and minimize future rehabilitation challenges. Deviations from widening with like pavement type shall be determined using the WSDOT Pavement Type Selection process (as outlined in Section 4 of this document).

When widening with PCC pavement, lane edges must correspond with lane lines. In some cases portions of an existing PCC pavement may require removal to allow the correct alignment of lane edges.

## **6.5.2 FLEXIBLE PAVEMENTS**

### 6.5.2.1 Prelevel

The use of prelevel prior to placement of an overlay is strictly limited to the correction of safety related deficiencies unless otherwise stated in the Rehabilitation Report. Safety-related uses of prelevel are as follows:

1. To remove hazardous “spot” locations, e.g., ponding areas or to restore proper pavement drainage at a specific location.
2. To correct deficient superelevation or cross slope when the deficiency is the cause of operational problems as determined from an accident history analysis.
3. To address pavement rutting specifically identified in the Rehabilitation Report (rutting of  $< \frac{3}{8}$ ” will generally be addressed with the overlay).

When prelevel is warranted as outlined above, it must be clearly documented in the pavement design and carefully detailed in the contract PS&E so that the use is clearly apparent to the contractor and the construction project engineer.

### 6.5.2.2 Crack Sealing

The item “crack sealing” will only be used when specified in the Rehabilitation Report. Crack sealing will be done only on cracks  $\frac{1}{4}$  inch and wider, see Standard Specification 5-04.3(5)C. Minor cracks will be addressed by the use of tack coat.

### 6.5.2.3 Pavement Repair

As WSDOT HMA pavements become thicker, due to successive overlays, failures tend to be limited to the surface course. Distress seen in thicker HMA pavements (generally greater than six inches) typically occurs as top down cracking. Top down cracks often penetrate only the wearing surface of a roadway and do not affect the aggregate base or subgrade. Options for rehabilitating pavements with top down cracking include planing and inlaying or overlaying depending upon the extent and depth of the distress. In most cases pavement coring will easily identify the depth of the required pavement repair.

Thinner pavements (generally less than six inches) often experience distress throughout the HMA thickness and sometimes into the aggregate base and subgrade. In these cases, full depth replacement of the HMA may be warranted, however, the repair of the pavement failures can

range from removing the entire pavement section to only the depth of the last overlay. Coring shall be performed to isolate the depth of required repair. Depending on the distress, removal and replacement of aggregate base and subgrade may be necessary. It is important that the Project Offices work closely with the Region Materials Office to determine the cause and extent of the pavement failures.

While pavement repair is preferred to totally remove the distressed pavement, increasing the overlay depth in localized areas can also be considered if conditions warrant. The additional cost of the overlay, however, shall be compared to the cost of providing pavement repair.

#### 6.5.2.4 Fog Sealing

Fog sealing open-graded pavements, such as Modified Class D, are recommended one year after placement and every four years thereafter. This maintenance activity will minimize pavement ravelling, extend pavement life, and provide the lowest life cycle cost. While the one and four year fog seals are recommended, each region shall determine fog sealing recommendations based on actual open-graded roadway performance. Shoulders shall be fog sealed based on the Region Materials Office recommendations.

#### 6.5.2.5 Recessed Lane Markers and Rumble Strips in HMA Roadways

Recessed lane markers and methyl methacrylate striping, thermoplastic stop bars, arrows, or other coated materials shall be removed prior to placement of the HMA overlay.

Rumble strips may be overlaid with a minimum depth of 0.15 feet HMA as long as there is no shift in the existing lane configuration that will cause the wheel path to cross over the underlying rumble strips. If this is the case, reflection cracking of the underlying rumble strip may occur.

On HMA inlay projects where the rumble strips need replacement, the width of the inlay can be increased outside of the fogline to include the rumble strip area.

Rumble strips on shoulders that will carry traffic as a detour shall be preleveled or ground and inlayed with a minimum depth of 0.15 feet HMA. A typical rehabilitation option is to plane and inlay a three foot width from the fogline towards the shoulder edge.

Rumble strips located between directional traffic shall be preleveled or removed by planing and inlayed.

Full compaction requirements (91 percent) shall be used on shoulder HMA to mitigate rumble strip deterioration in locations of freeze thaw or heavy moisture in addition to locations that have experienced chronic distress. Longitudinal joint density shall also apply.

#### 6.5.2.6 HMA Paving Depth

The Roadway Paving Program cost estimate is based on a pavement overlay depth of 0.15'. The required depth for an HMA overlay shall be as noted in the Rehabilitation Report. Every effort should be made to keep structural overlays to the 0.15' depth; however, in some cases this may not be possible due to existing structural conditions. Pavement designs greater than 0.15' require a detailed analysis, including a mechanistic-empirical pavement design, justifying the increase in overlay thickness.

Pavement thicknesses shall not be arbitrarily increased based on perceived concerns that the underlying layers will delaminate on a rotomill and inlay project. A thicker lift can be approved, however, cores obtained at a minimum of 0.25 mile intervals must substantiate that a delaminated layer exists.

#### 6.5.2.7 Tack Coat

A tack coat is required between all HMA layers (new construction and overlay).

#### 6.5.2.8 Correcting Shoulder Slopes

Roadways with a 0.02 ft/ft cross slope on the lanes and 0.05 ft/ft on the shoulders may be corrected provided the shoulder width is four feet or less. On roadways with shoulders wider than four feet, the correction will be deferred depending on funding.

#### 6.5.2.9 Removal of Open Graded Pavements Prior to Overlays

Open-graded pavements such as Modified D or OGEAP shall be removed prior to overlaying with dense-graded or open-graded asphalt (including shoulders). Removal of the open-graded asphalt layer is necessary to avoid stripping of the open-graded layer. On lower volume roadways, cold in-place recycling of an OGEAP layer is also an acceptable rehabilitation alternative.

On planing and inlay projects, where only the travelled lanes are rehabilitated, open-graded pavements may remain on the shoulders for many rehabilitation cycles. However, where there

is potential for the existing shoulder to become a travelled lane, the open-graded asphalt layer shall be removed prior to any future overlays.

#### 6.5.2.10 Limiting AADT for BST Application

Pavements with annual average daily traffic (AADT) less than 5,000 are designated as bituminous surface treatments. Exceptions (such as paving through small cities, locations with limited BST use, etc.) to this policy are evaluated on a case-by-case basis. The AADT criterion of 5,000 does not imply that BSTs cannot or should not be placed on higher AADT routes. If the Region requests placing BST on a higher volume HMA route the request shall be made based on a pavement analysis and documented in the Regions Rehabilitation Report. The request shall be approved by the State Pavement Engineer.

#### 6.5.2.11 PG Binder Bumping Criteria

WSDOT uses four basic types of dense graded mixes which are described by the nominal maximum aggregate size (NMAS). These are 3/8-inch, 1/2-inch, 3/4-inch, and 1-inch. Binder selection for HMA mixes is based on the PG grading system and the following criteria:

- Base PG grades with no adjustment for traffic speed or ESAL level
  - Western Washington: PG 58-22
  - Eastern Washington: PG 64-28
- Adjustment for traffic speed
  - Standing (0 to 10 mph): Increase PG high temperature by 2 grades (12°C)
  - Slow (10 to 45 mph): Increase PG high temperature by 1 grade (6°C)
  - Free flow (45+ mph): No adjustment
- Adjustment for traffic loading
  - ≤ 10,000,000 ESALs: No adjustment
  - 10,000,000 to 30,000,000 ESALs: Consider an increase in the PG high temperature by 1 grade (6°C)
  - > 30,000,000 ESALs: Increase PG high temperature by 1 grade (6°C)

The maximum increase in the PG high temperature for any combination of conditions will not exceed a 2 grade increase (or 12°C) over the base PG grade.

### **6.5.3 BITUMINOUS SURFACE TREATMENT PAVEMENTS**

#### 6.5.3.1 Prelevel

The use of prelevel prior to placement of a BST is limited strictly to the spot improvements such as broken shoulders or distressed pavement and is limited to 70 tons of HMA per lane mile. Increased prelevel quantities require approval by the State Materials Laboratory Pavement Division. Reasons for the increase prelevel quantities include:

1. Removal of hazardous “spot” locations, e.g., ponding areas or to restore proper pavement drainage at a specific location.
2. Correction of deficient superelevation or cross slope when the deficiency is the cause of operational problems as determined from an accident history analysis.
3. Pavement rutting specifically identified (rutting greater than  $\frac{3}{8}$  inch).

When prelevel is warranted as outlined above, it must be clearly documented in the pavement design and carefully detailed in the contract PS&E so that the use is clearly apparent to the contractor and the construction project engineer.

#### 6.5.3.2 Recessed Lane Markers and Rumble Strips in BST Roadways

Placement of recessed lane markers and rumble strips is discouraged in BST roadways due to insufficient surfacing depth. If recessed lane markers or rumble strips are used, the existing BST surfacing should be at least 0.25 ft thick. For subsequent BST overlays, the recessed lane marker or rumble strip area may require preleveling with HMA prior to BST placement.

HMA roadways where BST will be applied should have the rumble strips ground prior to BST placement.


#### 6.5.3.3 BST over New HMA Overlays

BST placed over newly placed HMA is generally not warranted, however special conditions can be justified by the Region. Where BST is placed for friction purposes, the need shall be clearly substantiated by the Region Materials Engineer with supporting friction data. For routes reverting back to BST after an HMA overlay, BST shall be placed when the HMA overlay is due for rehabilitation as determined by the WSPMS.

## 6.5.4 PORTLAND CEMENT CONCRETE PAVEMENTS

### 6.5.4.1 Intersections Limits

The limits for reconstruction with PCC shall be determined based on an evaluation of the existing pavement conditions. The area of pavement rutting or distress shall be limited to the vehicle start and stop areas. The major arterial approach legs to intersections may require PCC from 200 to 500 feet (Uhlmeier) back from the crosswalk (Figure 6.1).

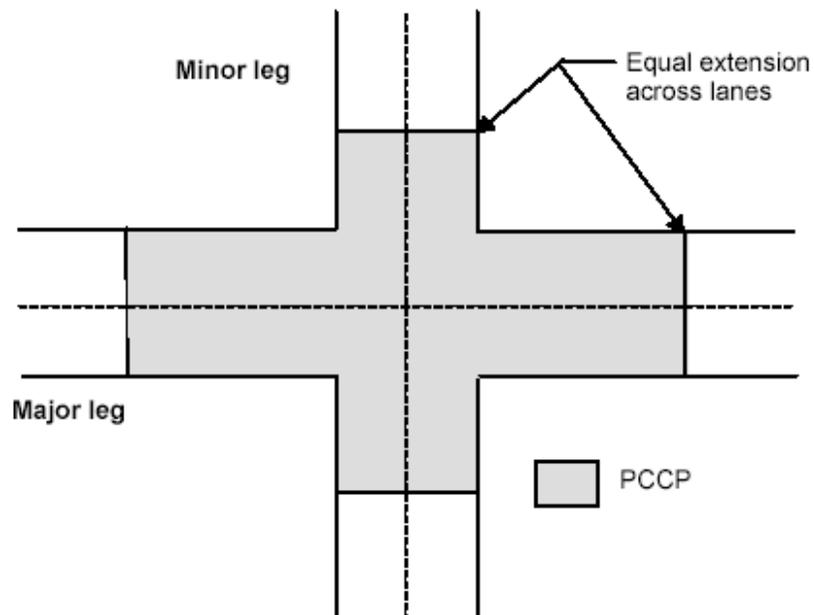

**Figure 6.1. Flexible Pavement with PCCP Intersections**

### 6.5.4.2 New Construction Dowel Bar Type (see Appendix 2 for additional details)

1. Western and Eastern Washington
  - a. Dowel Bar Type: Stainless steel alternates, MMFX-2, and Zinc clad
  - b. Dowel Bar Spacing:
    - i. Truck Lanes: eleven dowel bars per joint
    - ii. Non-truck lanes: eight dowel bars per joint (four per wheel path)
2. Mountain Passes (greater than 2,000 foot elevation)
  - a. Dowel Bar Type: Stainless steel alternates, MMFX-2, and Zinc clad
  - b. Dowel Bar Spacing:
    - i. Truck Lanes: eleven dowel bars per joint

- ii. Non-truck lanes: eight dowel bars per joint (four per wheel path)

#### 6.5.4.3 Hot Mix Asphalt Used for Base

HMA used as base under PCC shall be designed in accordance with Standard Specification 9-03.8. Test requirements and mix criteria meeting the ESALs less than 0.5 million, ½ inch aggregate gradation and a base grade asphalt binder (PG 58-22 for Western Washington, PG 64-28 for Mountain Passes and Eastern Washington) is appropriate.

#### 6.5.4.4 Use of Widened Lane

In urban roadways, it is recommended that shoulders be constructed with PCC, tied and doweled. If shoulders are constructed with HMA, at a minimum, the right most lane (truck lane) shall be constructed 14 feet wide and striped at 12 feet. Dowels shall be used for the portion of the widened lane starting 1.0 foot from the panel shoulder edge. Refer to Section 6.2.6 for more discussion on the use of widened lanes.

#### 6.5.4.5 PCC Shoulders

Dowel bars may be omitted from the left shoulder if the shoulder is never expected to carry traffic loads and is only to experience breakdown traffic. Right shoulders shall be tied in all cases and doweled if expected to carry future traffic. Refer to Section 6.2.6 for more discussion on the use of widened lanes and selection of PCC or HMA materials.

#### 6.5.4.6 Panel Replacements

Panels to be replaced shall be cracked into three or more pieces or settled by more than ½ inch. The minimum panel replacement length is 6 feet.

## **7. PAVEMENT REHABILITATION REPORT**

A pavement rehabilitation report is required for all HMA and PCC rehabilitation and new construction projects and is recommended for BST overlays where structural problems are evident. The Region Materials Engineer will prepare the report for review by the State Materials Laboratory Pavements Division. The report will summarize the findings of the pavement rehabilitation survey, include discussion of special features or problems, and provide pavement design/rehabilitation requirements.

The report shall cover the following topics, insofar as they pertain to the project, and include any other information pertinent to the analysis of the pavement rehabilitation needs:

### **7.1 GENERAL**

Description of the project using vicinity maps and plan views, status and scope of project, climatic conditions, traffic conditions (including 15 year design ESALs), possible construction contingencies, State Route number, milepost limits, project name, XL, OL or work order, Project Item Number, funded biennium, and anticipated construction dates.

### **7.2 GEOLOGY**

Pertinent topographic features as they relate to subgrade soil changes and pavement performance.

### **7.3 PAVEMENT CONDITION**

Description and photographs of existing pavement conditions with reference to pavement distress, subgrade soils, geologic features, drainage, frost distress or traffic. A core summary of the field investigation should be provided.

### **7.4 DRAINAGE AND WATER CONDITIONS**

Description of pertinent drainage features such as ditches, subgrade drains, drainage blankets, etc., both functioning and non-functioning. Where wet subgrades are encountered, moisture contents should be determined.

## 7.5 PAVEMENT LAYER PROFILE

Provide pavement profile information showing layer depths (example shown in Figure 7.1) and limits as they relate to past contracts, along with core and subgrade soil data. When deflection data is available, core sampling shall be taken every 0.25 to 0.50 miles of the projects length. Special areas of distress, particularly frost distress, shall also be noted.

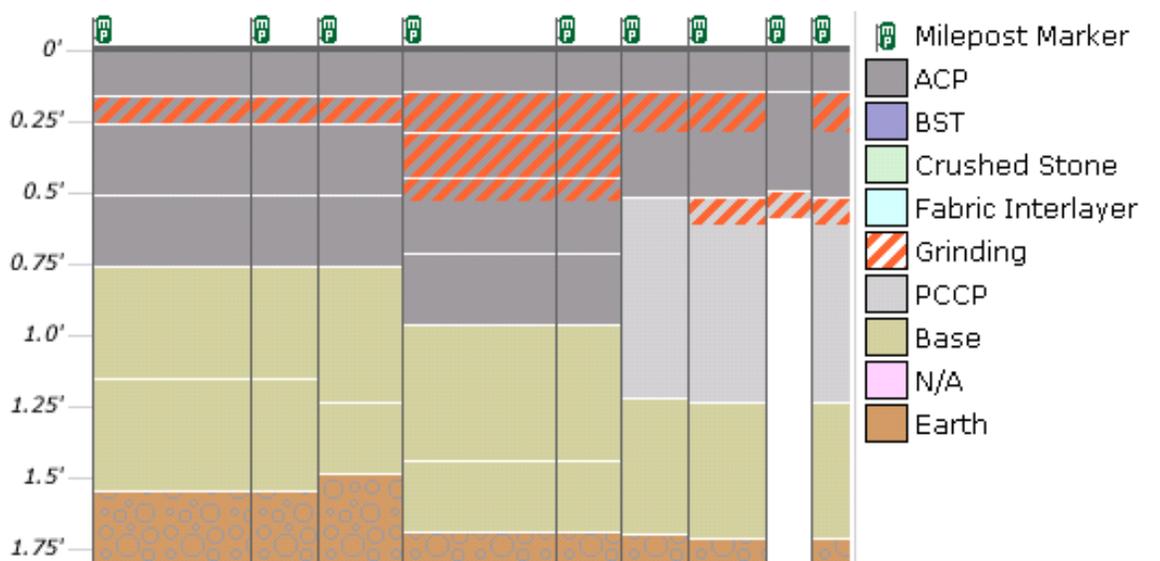


Figure 7.1. Illustration of Pavement Cross Section

## 7.6 MATERIALS

Source of materials to be used on the project along with special materials where warranted.

## 7.7 CONSTRUCTION CONSIDERATIONS

Items such as project timing, preleveling, digouts, subsealing, crack sealing, potential problems with materials sources, etc., should be covered.

## 7.8 SPECIAL FEATURES

Review any unique features pertinent to the project not covered under other topics.

## 7.9 PAVEMENT DESIGN

Specific criteria are warranted concerning pavement rehabilitation design, correction of special problems, unique use of materials or procedures, drainage features, and frost distress corrections, etc.

## **7.10 STATE MATERIALS LABORATORY PAVEMENT DIVISION REPORT**

After the State Materials Laboratory Pavement Division has evaluated the pavement rehabilitation report, tested base course and subgrade samples (where applicable), and verified the pavement rehabilitation design, a report, if necessary, is prepared reviewing and commenting on the various features and rehabilitation needs of the project. Otherwise, concurrence will be provided in a signature and date block provided on the Region Rehabilitation Report. This report is then returned to the Region Materials Engineer for distribution.

## **7.11 OVERLAY DESIGN PROCEDURES**

### **7.11.1 HMA OVERLAYS**

HMA overlay design can be accomplished either by use of the mechanistic-empirical based scheme used in the Everpave<sup>®1</sup> computer program or the AASHTO Guide for Design of Pavement Structures (1993), Part III, Chapter 5. The Everpave<sup>®</sup> program is for use with flexible pavements. The AASHTO procedure can be applied to either flexible or rigid pavement structures.

### **7.11.2 GRANULAR OVERLAYS (CUSHION COURSES)**

The granular overlay system (often referred to as a "cushion course") is an alternative type of overlay for rehabilitating mostly low volume, rural roads (this does not necessarily imply a low number of ESALs). The overlay consists of a layer of densely compacted, crushed rock (CSBC) overlain by a generally thin surface layer.

### **7.11.3 PCC OVERLAYS**

Generally, only unbonded PCC overlays will be used if a PCC surfacing is selected. Bonded PCC overlays are not considered as a structural solution and have a higher than acceptable risk of premature failure. Unbonded PCC overlays will be designed by use of the AASHTO Guide for Design of Pavement Structures (1993).

---

<sup>1</sup> Everpave<sup>®</sup> (Everseries Program) can be downloaded from - <http://www.wsdot.wa.gov/biz/mats/Apps/EPG.htm>

**7.11.4 DOWEL BAR RETROFIT, PANEL REPLACEMENT, AND DIAMOND GRINDING**

Dowel bar retrofit, in conjunction with localized panel replacements (as necessary) and diamond grinding has proven to be a viable PCC pavement rehabilitation procedure in Washington State. This rehabilitation option restores transverse joint load transfer, repairs PCC panels that are distressed beyond repair, and provides a smooth riding pavement surface.

**7.12 DETERMINATION OF OVERLAY THICKNESSES**

**7.12.1 HMA OVERLAYS — STRUCTURAL**

The minimum depth of HMA overlay required for structural applications will be 0.12 feet. Depths less than 0.12 feet are considered to be nonstructural overlays.

**7.12.2 HMA OVERLAYS — NONSTRUCTURAL**

A nonstructural overlay can be any depth that achieves adequate density during construction. For example, 3/8 inch HMA can be successfully placed at depths of less than 0.08 foot in the proper paving conditions (including weather).

**7.12.3 MINIMUM LIFT THICKNESS**

To ensure that adequate compaction can be obtained the following minimum lift thicknesses by class of mix shall be followed:

<b>Class of Mix</b>	<b>Minimum Lift Thickness, ft.</b>
3/8 inch HMA	0.08
1/2 inch HMA	0.12
3/4 inch HMA	0.20
1 inch HMA	0.25

**7.12.4 GRANULAR OVERLAY**

The surfacing depth can vary depending on local conditions and requirements; however, the CSBC depth shall not exceed 0.50 feet in order to achieve the maximum structural benefit.

### **7.12.5 PCC OVERLAY**

The minimum, unbonded PCC slab thickness shall not be less than 0.65 ft unless a special analysis indicates otherwise. Normally, unbonded PCC overlay thicknesses will be about as thick as new PCC construction.

## REFERENCES

1. Dell'Isola, A. J. and S. J. Kirk (1981). *Life Cycle Costing for Design Professionals*, McGraw-Hill, New York.
2. Federal Highway Administration (FHWA), (1987). *Techniques for Pavement Rehabilitation, Participant's Notebook*, FHWA-HI-90-022.
3. Federal Highway Administration (FHWA), (1998). *Life cycle Cost Analysis in Pavement Design*, FHWA-SA-98-079 (1998). <http://199.79.179.19/OLPFiles/FHWA/010114.pdf>
4. Kleskovic, Peter Z. (1990). *A Discussion of Discount Rates for Economic Analysis of Pavement*, Draft Report, FHWA Pavement Division.
5. Office of Management and Budget (OMB) (1992—updated 2003), *Guidelines and Discount Rates for Benefit-Cost Analysis of Federal Programs*, Circular No. A-94 (Revised). <http://www.whitehouse.gov/omb/circulars/a094/a094.html#ap-b>
6. Pennsylvania Department of Transportation (Penn DOT), (2001). *Publication 242 – Pavement Policy Manual*.  
<ftp://ftp.dot.state.pa.us/public/Bureaus/BOMO/RM/Publication242.pdf>.
7. Peterson, Dale E. (1985). *NCHRP Synthesis of Highway Practice No. 122: Life cycle Cost Analysis of Pavements*, Highway Research Board, National Research Council, Washington, D.C.
8. Uhlmeyer, J.S. (2003). *PCCP Intersections Design and Construction in Washington State*, WA-RD 503.2, Washington State Department of Transportation.

## APPENDIX 1 – PAVEMENT TYPE SELECTION CRITERIA

The information presented in Appendix 1 is intended as a guide for determining the pavement type selection for individual projects. Pavement type selection is a three-part process which include a pavement design analysis, life cycle cost analysis and evaluation of specific project details. Each of the following section provides examples and discussion necessary to prepare the final pavement type selection determination.

### Pavement Design Analysis

The pavement design should be performed first, since the results may preclude the need to continue with the remainder of the pavement type selection process (life cycle cost analysis and project specific details).

The pavement design analysis includes the review and analysis of the following: subgrade competency, traffic analysis, materials, climate/drainage, environment, construction considerations, and any other pavement design factors.

#### 1. Subgrade Competency

This is the only “go/no go” decision to be made under the pavement design analysis. HMA tends to perform better in situations where long-term settlement is expected. If the engineering evaluation of the subgrade concludes the presence of peat or organic silts or the potential for long-term settlement that exceeds two or more inches, then the pavement type selection is complete and HMA is the selected pavement type. If the engineering evaluation of the subgrade concludes that either pavement type is viable, then the pavement type selection process proceeds to the next step.

#### 2. Classification for Pavement Design

Pavements can be divided into different traffic classes depending on light to heavy traffic. Flexible and rigid pavements can be designed to accommodate these wide traffic ranges. For each of the pavement classes, traffic is quantified according to the number of ESALs. Based on the traffic volume and traffic growth rate, the design traffic loading can be estimated over the structural design period or the analysis period. The design traffic loading determines the pavement thickness needed to support the traffic loading over the structural design period.

Correctly estimating design traffic is crucial to selecting an appropriate pavement type. To calculate the total design traffic per lane that a pavement will carry over its structural design life, it is necessary to estimate present traffic loading. To estimate future traffic loadings, traffic growth rates should be used. Depending on the roadway segment’s importance, conducting a sensitivity analysis to compare growth rates and the impact of the growth rate on pavement thickness may be worthwhile.

#### 3. Materials

Selecting materials for a road pavement design is determined by the availability of suitable materials, environmental considerations, construction methods, economics, and previous performance. To select the materials that best suit the conditions, these factors must be evaluated during the design to ensure a whole-life cycle strategy.

### 3.1. Availability and Performance

Most road construction materials have been classified and specifications prepared for each of the material classes. Every road pavement, independent of its type and applied materials, is subjected to certain traffic loads and environmental factors. These factors create various deterioration modes under in-service conditions. Deterioration modes and the pavement’s susceptibility to various deteriorating factors depend on the type of pavement and materials applied. **Table A1.1** shows the pavement deterioration modes for HMA and PCC pavements.

**Table A1.1 Pavement Deterioration Modes**

HMA Pavements	PCC Pavements
<ul style="list-style-type: none"> <li>▪ Surface deterioration                             <ul style="list-style-type: none"> <li>– Decrease in friction</li> <li>– Rutting</li> <li>– Surface cracking</li> <li>– Raveling (stripping)</li> <li>– Roughness</li> <li>– Studded tire wear</li> </ul> </li>   <li>▪ Structural deterioration                             <ul style="list-style-type: none"> <li>– Base and subgrade rutting</li> <li>– Fatigue cracking</li> <li>– Reflective cracking</li> </ul> </li> </ul>	<ul style="list-style-type: none"> <li>▪ Surface deterioration                             <ul style="list-style-type: none"> <li>– Decrease in friction</li> <li>– Surface cracking</li> <li>– Curling and warping</li> <li>– Joint raveling</li> <li>– Roughness</li> <li>– Studded tire wear</li> </ul> </li>   <li>▪ Structural deterioration                             <ul style="list-style-type: none"> <li>– Cracking</li> <li>– Pumping</li> <li>– Faulting</li> </ul> </li> </ul>

Pavement surface defects may only require surface course maintenance or rehabilitation. Structural deterioration is a defect of the whole pavement structure and treating it may require more extensive pavement rehabilitation. Knowing the difference between these two types of deterioration is important to maintaining and properly understanding pavement durability (or pavement life).

Past performance with a particular material should be considered in tandem with applicable traffic and environmental factors. The performance of similar pavements or materials under similar circumstances should also be considered. Information from pre-existing designs, material tests, and pavement management data can help characterize a specific material’s suitability for pavement applications.

WSDOT’s experience has been that all pavement types are affected by studded tire wear (see Figures A1.1 and A1.2). The abrasion on pavement surfaces caused by studded tires, wears down the pavement surface at a much greater rate than any other pavement/tire interaction. The same can be said for open graded surface courses and wear due to buses with snow chains. Significant surface deterioration has occurred in as little as 4 to 6 years on HMA and 10 to 15 years on PCC pavements. For the pavement type selection process, this implies that future rehabilitation timing may be reduced for each pavement type due to the damaging effect of studded tires and should be considered in the analysis until such a time that studded tire use is prohibited.

### 3.2. Recycling

To enhance sustainable development, consider using recycled materials in roadway construction. Future rehabilitation or maintenance treatments, if applicable, should incorporate recycled materials whenever possible.



**Figure A1.1. Studded Tire Wear on PCC**



**Figure A1.2. Studded Tire Wear on HMA**

### 3.3. HMA Mixes

WSDOT uses four basic types of dense graded mixes which are described by the nominal maximum aggregate size (NMAS). These are 3/8-inch, 1/2-inch, 3/4-inch, and 1-inch. Binder selection for HMA mixes is based on the PG grading system and the following criteria:

- Base PG grades with no adjustment for traffic speed or ESAL level
  - Western Washington: PG 58-22
  - Eastern Washington: PG 64-28
- Adjustment for traffic speed
  - Standing (0 to 10 mph): Increase PG high temperature by 2 grades (12°C)
  - Slow (10 to 45 mph): Increase PG high temperature by 1 grade (6°C)
  - Free flow (45+ mph): No adjustment
- Adjustment for traffic loading
  - ≤ 10,000,000 ESALs: No adjustment
  - 10,000,000 to 30,000,000 ESALs: Consider an increase in the PG high temperature by 1 grade (6°C)
  - > 30,000,000 ESALs: Increase PG high temperature by 1 grade (6°C)
- Maximum PG high temperature: The maximum increase in the PG high temperature for any combination of conditions should not exceed a 2 grade increase (or 12°C) over the base PG grade.

## 4. Climate/Drainage

Both surface runoff and subsurface water control must be considered. Effective drainage design prevents the pavement structure from becoming saturated. Effective drainage is essential for proper pavement performance and is assumed in the structural design procedure. WSDOT rarely includes open graded drainage layers in its pavement structures. This does occur only for extreme subsurface drainage issues.

## 5. Pavement Design

Pavement design shall be conducted in accordance with the AASHTO Guide for Design of Pavement Structures – 1993 and this Pavement Policy. All pavement designs, rehabilitation strategies, and rehabilitation timing must be submitted, for approval, to the Pavement Design Engineer at the State Materials Laboratory Pavements Division.

### 5.1. Additional PCC Issues

WSDOT has demonstrated that the PCC pavements constructed in the late 1950s through the 1960s are able to obtain a 50-year or more pavement life as long as joint faulting can be overcome. The ability to provide adequate joint design to minimize joint faulting is addressed by requiring the use of non-erodible

bases and dowel bars (1-½ inch diameter by 18 inch length) at every transverse joint. The use of epoxy-coated dowel bars, both locally and nationally, does not necessarily ensure that a 50-year performance life will be obtained. Dowel bar specifications require the use of corrosion resistant dowel bars (stainless steel alternatives, MMFX-2 or Zinc clad) on all newly constructed concrete pavements (Appendix 2). Rehabilitation of PCC pavements will potentially require diamond grinding following 20 to 30 years of traffic to address studded tire wear.

## 5.2. Additional HMA Issues

For heavily trafficked roadways (primarily the interstate and principal arterials), the pavement thickness should be designed to such a depth that future roadway reconstruction is not necessary. The pavement thickness should be designed such that 50 years of traffic will not generate significant bottom up (fatigue) cracking. Future mill and fill or HMA overlays will be required to address surface distress (rutting or top down cracking) and aging of the HMA surface.

## 5.3. Effect of Studded Tire Wear.

WSDOT is currently in the process of investigating a number of mitigation techniques for the wear that results on PCC pavements due to studded tires. These include increasing the PCC flexural strength and utilization of a combined aggregate gradation. At this time, both of these studies are still in progress and conclusions are yet to be drawn. In the past, WSDOT has increased the PCC slab thickness by one inch to accommodate future diamond grinding(s). With the current PCC slab thicknesses contained in the Pavement Policy, this is no longer encouraged. Studded tire damage is also a concern for HMA pavements. WSDOT has constructed a number of stone matrix asphalt (SMA) pavements, but have had a number of construction related difficulties, such that the ability to determine the impact that a SMA will have on reducing studded tire damage is unknown. In the life cycle cost analysis, the accelerated wear on HMA pavements will be incorporated through a shorter performance period on future overlays (but only as supported by Pavement Management data).

## 6. Construction Considerations

Pavement construction issues are an important component of the selection of pavement type. These issues can include:

- Pavement thickness constraints. Consider the impact of utilities below the pavement and overhead clearances may have on limiting the layer thickness and type, and/or limit future overlay thickness.
- Effects on detours, bypasses, and alternate routes. Consider the geometric and structural capacity of detours, bypasses and alternate routes to accommodate rerouted traffic.
- Effects of underground pipes and services on performance. Determine the impact of existing utilities and future utility upgrades on initial and future rehabilitation treatments.
- Anticipated future improvements and upgrades. Consider if the pavement type restricts or minimizes the ability to efficiently and cost effectively upgrade and/or improve the roadway width, geometry, structural support, etc.
- Impact on maintenance operations, including winter maintenance. Will the selected pavement type have impacts due to freeze-thaw (surface and full-depth) or snow and ice removal?
- Grades, curvature, and unique loadings (slow-moving vehicles and starting and stopping). How will steep grades, curvature and unique loadings impact pavement performance? Slow moving vehicles will generate increased strain levels in the HMA pavement structure and these strains can significantly impact pavement performance (i.e. rutting and cracking).
- A schedule analysis may need to be conducted to determine critical construction features (haul truck access, traffic control constraints – road closures, etc) and their impact on the project. This should also include staging analysis for multiple projects within the project corridor (to ensure that alternate routes are free of traffic delay due to construction activities). The Construction

Analysis for Pavement Rehabilitation Strategies CA4PRS<sup>2</sup> software is useful in determining construction impacts and duration.

## 7. Other Factors

Evaluate other factors that are unique to the project or corridor.

### Life Cycle Cost Analysis

Life cycle cost analysis provides a useful tool to assist in the pavement type selection. Only differential factors should be considered. The alternative resulting in the lowest net present value or annualized cost over a given analysis period is considered the most cost efficient.

Life cycle costs refer to all costs that are involved with the construction, maintenance, rehabilitation and associated user impacts of a pavement over a given analysis period. Life cycle cost analysis is an economic comparison of all feasible construction or rehabilitation alternatives, evaluated over the same analysis period. A feasible alternative meets the required constraints, such as geometric alignment, construction period, traffic flow conditions, clearances, right-of-way, etc. (FHWA). At a minimum, one HMA and one PCC alternative should be evaluated. The total cost (initial construction, maintenance, rehabilitation, and user costs) of each design alternative can be compared based on the present value or equivalent uniform annual cost.

The life cycle cost analysis is conducted using the FHWA life cycle cost analysis software, which is available through the State Materials Laboratory Pavements Division.

The Federal Highway Administration's policy<sup>3</sup> on life cycle cost analysis "is that it is a decision support tool, and the results of the life cycle cost analysis are not decisions in and of themselves. The logical analytical evaluation framework that life cycle cost analysis fosters is as important as the life cycle cost analysis results themselves." (FHWA).

Net present value is the economic efficiency indicator of choice (FHWA). The annualized method is appropriate, but should be derived from the net present value. Computation of benefit/cost ratios is generally not recommended because of the difficulty in sorting out costs and benefits for use in the benefit/cost ratios (FHWA).

Future costs should be estimated in constant dollars and discounted to the present using a discount rate. The use of constant dollars and discount rates eliminates the need to include an inflation factor for future costs.

#### 1. Net Present Value

The present value method is an economic method that involves the conversion of all of the present and future expenses to a base of today's costs (Dell'Isola). The totals of the present value costs are then compared one with another. The general form of the present value equation is as follows:

$$NPV = F \frac{1}{(1+i)^n}$$

where,

NPV = Net Present Value

F = Future sum of money at the end of n years

n = Number of years

i = Discount rate

---

<sup>2</sup> The CA4PRS software can be downloaded at <http://www.wsdot.wa.gov/maintops/mats/apps/CA4PRS.htm>.

<sup>3</sup> Federal Highway Administration, Final Policy Statement on LCCA published in the September 18, 1996, *Federal Register*.

## 2. Annualized Method

The annualized method is an economic procedure that requires converting all of the present and future expenditures to a uniform annual cost (Dell’Osola). This method reduces each alternative to a common base of a uniform annual cost. The costs are equated into uniform annual costs through the use of an appropriate discount rate (Kleskovic). Recurring costs, such as annual maintenance, are already expressed as annual costs. A given future expenditure, such as a pavement overlay, must first be converted to its present value before calculating its annualized cost. The general form of the Annualized cost equation is as follows:

$$A = PV \frac{i(1+i)^n}{(1+i)^n - 1}$$

where,

A = Annual cost

PV = Present Value

n = Number of years


i = Discount rate

## 3. Economic Analysis

The costs to be included in the analysis are those incurred to plan, work on and maintain the pavement during its useful life. All costs that can be attributed to the alternative and that differ from one alternative to another must be taken into account. These include costs to the highway agencies and user costs.

### 3.1. Performance Period

As a pavement ages, its condition gradually deteriorates to the point where some type of rehabilitation treatment is necessary. The timing between rehabilitation treatments is defined as the performance life. An example of this is illustrated in Figure A1.3. Performance life for the initial pavement design and subsequent rehabilitation activities has a major impact on life cycle cost analysis results (FHWA).

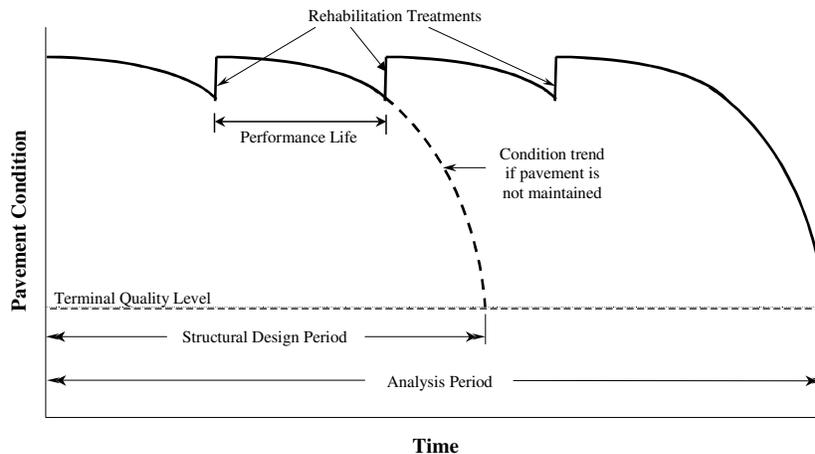

**Figure A1.3. Example of Pavement Performance Life**

When available, the performance life of the various rehabilitation alternatives should be determined based on past performance history. In these cases, the WSPMS provides history on past pavement performance lives. In instances where the anticipated performance life is not well established (i.e., due to improved engineering and technologies), selection of the performance life will be coordinated and concurred upon by the State Materials Laboratory Pavements Division.

### 3.2. Initial Construction Costs

Unit costs vary according to location, the availability of materials, the scope of the project and any applicable standards. They can be estimated based on previous experiences, generally by averaging the bids submitted for recent projects of similar scope. Typical item costs can be located in bid item tabulations. The bid item costs may need to be adjusted according to local availability and work constraints. Mobilization, engineering and contingencies, and preliminary engineering can be excluded (sales tax should be included) for the initial construction cost estimate, since these costs are similar for HMA and PCC.

### 3.3. Maintenance and Rehabilitation Costs

The type and frequency of future maintenance and rehabilitation operations vary according to the pavement type being considered. Knowing how a particular pavement type performed in the past is a valuable guide in predicting future performance (Penn DOT). The WSPMS should be reviewed for past performance of rehabilitation and maintenance schedules. Costs must always be determined as realistically and accurately as possible based on local context and specific project features.

When calculating the rehabilitation costs, include the cost of pavement resurfacing or PCC rehabilitation, planning or diamond grinding, shoulders, pavement repair, drainage and guardrail adjustments, maintenance and protection of traffic, etc. Mobilization (5%), engineering and contingencies (15%), preliminary engineering (10%), and sales tax should be included in all rehabilitation costs.

Construction duration should reflect the actual construction time that is required for each pavement type. Construction durations should consider improvements, proposals or innovative contracting procedures in construction processes.

If a difference exists in routine maintenance costs between the various alternatives, these costs should be included in the life cycle cost analysis.

Table A1.2 contains a probable scenario corresponding to average traffic and climate conditions, assuming that state-of-the-art practices have been followed during construction and that maintenance and rehabilitation projects are carried out efficiently and on schedule.

**Table A1.2. Rehabilitation Scenario for HMA and PCC Pavements**

Year	HMA Pavement	PCC Pavement
0	Construction or reconstruction	Construction or reconstruction
15	0.15' mill and HMA overlay	
20		Diamond grinding
30	0.15' HMA overlay	
40		Diamond grinding
45	0.15' mill and HMA overlay	
50	Salvage value (if applicable)	Salvage value (if applicable)

### 3.4. Salvage Value

Salvage value is the asset value at the end of the analysis period. The difference between the salvage values of the various alternatives for a project can be small, because discounting can considerably reduce this value, but the size of this reduction is influenced by the actual discount rate chosen. As for the value assigned to the pavement materials, or terminal value, predicting the proportion of recovery or recycling of these materials on-site at the end of the analysis period is uncertain.

If an alternative has reached its full life cycle at the end of the analysis period, it is generally considered to have no remaining salvage value. If it has not completed a life cycle, it is given a salvage value, which is usually determined by multiplying the last construction or rehabilitation cost, by the ratio of the remaining expected life cycle to the total expected life.

$$\text{Salvage Value} = \text{CC} \times \frac{\text{ERL}}{\text{TEL}}$$

where,

CC = Last construction or rehabilitation project costs

ERL = Expected remaining life of the last construction or rehabilitation project

TEL = Total expected life of the last construction or rehabilitation project

### 3.5. User Costs

It is difficult to determine whether or not one rehabilitation alternative results in a higher vehicle operating cost than another. Therefore, the user costs associated with each of the rehabilitation alternatives shall be determined using only costs associated with user delay. This shall be based on the construction periods and the traffic volumes that are affected by each of the rehabilitation alternatives.

Several studies have been performed that associate cost with the amount of time the user is delayed through a construction project. The method used is not as important as using the same method for each of the alternatives.

The costs associated with user delays are estimated only if the effects on traffic differ among the alternatives being analyzed. For future rehabilitation work, user costs associated with delays can be substantial for heavily travelled roadways, especially when work is frequent.

While there are several different sources for the dollar value of time delay, the recommended mean values and ranges for the value of time (in 2006 dollars) shown in Table A1.3, are reasonable.

**Table A1.3. Recommended Dollar Values per Vehicle Hour of Delay (FHWA) (adjusted to 2006 dollars)<sup>4</sup>**

Vehicle Class	Value Per Vehicle Hour	
	Value	Range
Passenger Vehicles	\$13.96	\$12 to \$16
Single-Unit Trucks	\$22.34	\$20 to \$24
Combination Trucks	\$26.89	\$25 to \$29

### 3.6. Other Costs

Surfacing types and characteristics influence the noise emitted on tire-to-pavement contact. If construction of a noise attenuation structure is planned, the cost of that structure must be included in the treatment costs of the alternative being analyzed. The issue of safety can be addressed similarly.

### 3.7. Discount Rate

"In a life cycle cost analysis, a discount rate is needed to compare costs occurring at different points in time. The discount rate reduces the impact of future costs on the analysis, reflecting the fact that money has a time value" (Peterson). The discount rate is defined as the difference between the market interest rate and inflation, using constant dollars.

<sup>4</sup> Calculator for converting costs to current dollars can be accessed at <http://data.bls.gov/cgi-bin/cpicalc.pl>

Table A1.4. shows recent trends in the real treasury interest rates for various analysis periods published in the annual updates to OMB Circular A-94 (OMB).

For all life cycle cost analysis, a discount rate of four percent shall be used as is supported by the long term rates shown in Table A1.4.

### 3.8. Analysis Period

The analysis period is the time period used for comparing design alternatives. An analysis period may contain several maintenance and rehabilitation activities during the life cycle of the pavement being evaluated (Peterson). In general, the recommended analysis period coincides with the useful life of the most durable alternative. Table A1.5. contains WSDOT recommended analysis periods.

**Table A1.4. Real Treasury Interest Rates (OMB)**

<b>Year</b>	<b>3-Year</b>	<b>5-Year</b>	<b>7-Year</b>	<b>10-Year</b>	<b>30-Year</b>
1979	2.8	3.4	4.1	4.6	5.4
1980	2.1	2.4	2.9	3.3	3.7
1981	3.6	3.9	4.3	4.4	4.8
1982	6.1	7.1	7.5	7.8	7.9
1983	4.2	4.7	5.0	5.3	5.6
1984	5.0	5.4	5.7	6.1	6.4
1985	5.9	6.5	6.8	7.1	7.4
1986	4.6	5.1	5.6	5.9	6.7
1987	2.8	3.1	3.5	3.8	4.4
1988	3.5	4.2	4.7	5.1	5.6
1989	4.1	4.8	5.3	5.8	6.1
1990	3.2	3.6	3.9	4.2	4.6
1991	3.2	3.5	3.7	3.9	4.2
1992	2.7	3.1	3.3	3.6	3.8
1993	3.1	3.6	3.9	4.3	4.5
1994	2.1	2.3	2.5	2.7	2.8
1995	4.2	4.5	4.6	4.8	4.9
1996	2.6	2.7	2.8	2.8	3.0
1997	3.2	3.3	3.4	3.5	3.6
1998	3.4	3.5	3.5	3.6	3.8
1999	2.6	2.7	2.7	2.7	2.9
2000	3.8	3.9	4.0	4.0	4.2
2001	3.2	3.2	3.2	3.2	3.2
2002	2.1	2.8	3.0	3.1	3.9
2003	1.6	1.9	2.2	2.5	3.2
2004	1.6	2.1	2.4	2.8	3.5
2005	1.7	2.0	2.3	2.5	3.1
2006	2.5	2.6	2.7	2.8	3.0
2007	2.5	2.6	2.7	2.8	3.0
2008	2.1	2.3	2.4	2.6	2.8
2009	0.9	1.6	1.9	2.4	2.7
Average	3.1	3.5	3.8	4.0	4.3

**Table A1.5. WSDOT Recommended Analysis Periods by Traffic Level**

<b>Traffic Level</b>	<b>Analysis Period (years)</b>
All WSDOT Highways	50

### 3.9. Risk Analysis

The deterministic approach to life cycle costs involves the selection of discrete input values for the initial construction costs, routine maintenance and rehabilitation costs, the timing of each of these costs, and the discount rate. These values are then used to calculate a discrete single value for the present value of the specified project. The deterministic approach applies procedures and techniques without regard for the variability of inputs. An example of the deterministic approach is shown in below.

Initial Cost = \$1,000,000



Discount rate = 4 percent

$$\begin{aligned}
 PW &= \$1,000,000 + \frac{\$500,000}{(1.04)^{10}} + \frac{\$500,000}{(1.04)^{20}} + \frac{\$500,000}{(1.04)^{30}} + \frac{\$500,000}{(1.04)^{40}} - \$50,000 \\
 &= \$1,709,720
 \end{aligned}$$

The deterministic approach is a viable method for determining life cycle costs; however, life cycle cost analysis contains several possible sources of uncertainty. In certain cases, the uncertainty factors may be sizeable enough to affect the ranking of the alternatives. To obtain more credible results, a systematic evaluation of risk should always be carried out. The primary disadvantage of the deterministic approach is that it does not account for the input parameter variability.

The concept of risk comes from the uncertainty associated with future events – the inability to know what the future will bring in response to a given action today (FHWA). Risk analysis is concerned with three basic questions (FHWA):

1. What can happen?
2. How likely is it to happen?
3. What are the consequences of it happening?

Risk analysis answers these questions by combining probabilistic descriptions of uncertain input parameters with computer simulation to characterize the risk associated with future outcomes (FHWA). It exposes areas of uncertainty typically hidden in the traditional deterministic approach to life cycle cost analysis, and it allows the decision maker to weigh the probability of an outcome actually occurring (FHWA).


The two most commonly used methods of assessing the risk are probabilistic analysis and sensitivity analysis. The probabilistic approach combines probability descriptions of analysis inputs to generate the entire range of outcomes as well as the likelihood of occurrence. Probabilistic analysis represents uncertainties more realistically than does a sensitivity analysis. Sensitivity analysis assigns the same weighting to all extreme or mean values, whereas probabilistic analysis assigns the lowest probability to extreme values. A probabilistic analysis is advocated, but if this is not possible, a sensitivity analysis at the very least should be carried out.

### 3.10. Probabilistic Analysis

The probabilistic approach takes into account the uncertainty of the variables used as inputs in the life cycle cost analysis. The probability distribution is selected for each input variable, which are then used to generate the entire range of outcomes and the likelihood of occurrences for both the associated costs and the performance life. The procedure often used to apply a probability distribution is a “Monte Carlo Simulation”. The Monte Carlo Simulation is a computerized procedure that takes each input variable, assigns a range of values (using the mean and standard deviation of the input variable), and runs multiple combinations of all inputs and ranges to generate a life cycle cost probability distribution. Using the probabilistic approach allows for the ability of determining the variability or “spread” of the life cycle cost distributions and determining which alternative has the lower associated risk (see Figure A1.4).

An example of a probabilistic analysis is included in Appendix 5. WSDOT input values for the probabilistic analysis are contained in Appendix 4.

By performing the Monte Carlo computer simulation, thousands, even tens of thousands of samples are randomly drawn from each input distribution to calculate a separate what-if scenario (FHWA). Risk analysis results are presented in the form of a probability distribution that describes the range of possible outcomes along with a probability weighting of occurrence (FHWA). With this information, the decision maker knows not only the full range of possible values, but also the relative probability of any particular outcome actually occurring (FHWA).

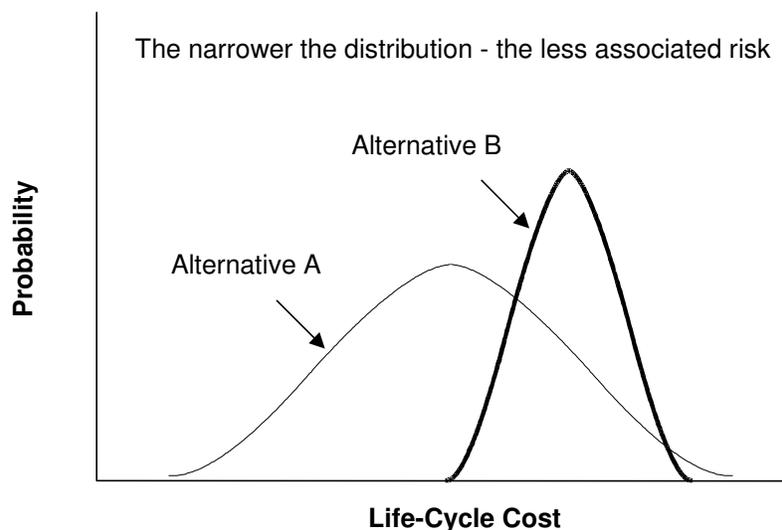

**Figure A1.4. Probability Distribution**

### 3.11. Sensitivity Analysis

Sensitivity analysis is a technique used to determine the influence of major input assumptions, projections, and estimates on life cycle cost analysis results. In a sensitivity analysis, major input values are varied (either within some percentage of the initial value or over a range of values) while all other input values remain constant and the amount of change in results is noted (FHWA).

An example of a sensitivity analysis is shown below.

- Two pavement design strategies with discount rates that vary from two to six percent over a 35-year analysis period will be described.
- Figure A1.5 summarizes Tables A1.6 and A1.7 show the comparison of net present value at the various discount rates. For this example, Alternative 1 is more expensive at discount

rates of five percent and lower, while Alternative 2 is more expensive at discount rates six percent and above.

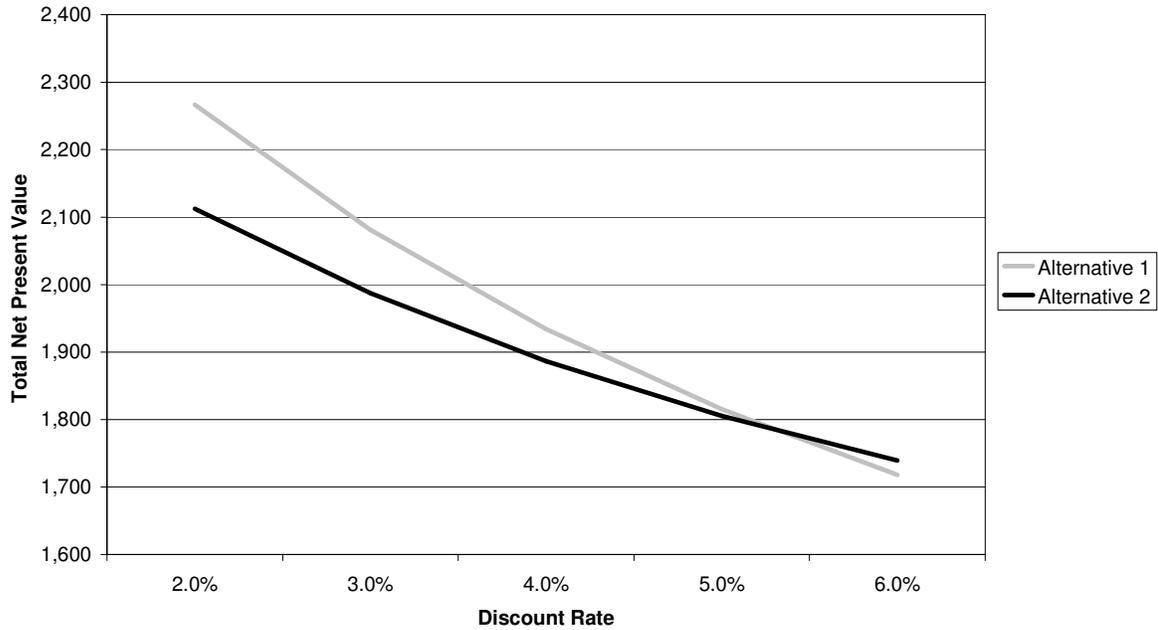


Figure A1.5. Sensitivity of Net Present Value to Discount Rate

Table A1.6. Sensitivity Analysis – Alternative 1 (FHWA)

Activity	Year	Cost	Net Present Value				
			2.0%	3.0%	4.0%	5.0%	6.0%
Construction	0	975	975	975	975	975	975
User Cost	0	200	200	200	200	200	200
Rehab #1	10	200	164	149	135	123	112
User Cost #1	10	269	220	200	182	165	150
Rehab #2	20	200	135	111	91	75	62
User Cost #2	20	361	243	200	165	136	113
Rehab #3	30	200	110	82	62	46	35
User Cost #3	30	485	268	200	150	112	85
Salvage	35	-100	-50	-36	-25	-18	-13
TOTAL NPV			2,266	2,081	1,934	1,815	1,718

**Table A1.7. Sensitivity Analysis – Alternative 2 (FHWA)**

Activity	Year	Cost	Net Present Value				
			2.0%	3.0%	4.0%	5.0%	6.0%
Construction	0	1,100	1,100	1,100	1,100	1,100	1,100
User Cost	0	300	300	300	300	300	300
Rehab #1	15	325	241	209	180	156	136
User Cost #1	15	269	200	173	139	129	112
Rehab #2	30	325	179	134	100	75	57
User Cost #2	30	361	199	149	111	84	63
Salvage	35	-217	-108	-77	-55	-39	-28
TOTAL NPV			2,112	1,987	1,886	1,805	1,739

A primary drawback of the sensitivity analysis is that the analysis gives equal weight to any input value assumptions, regardless of the likelihood of occurring (FHWA). In other words, the extreme values (best case and worst case) are given the same likelihood of occurrence as the expected value, which is not realistic (FHWA).

### Project Specific Details

After completing the pavement design analysis and the life cycle cost analysis, evaluation of project specific details must be identified when there are two or more viable alternatives. Finding the HMA and PCC alternatives to be approximately equivalent, in regards to life cycle cost, the Region must provide project specific details that support the selected pavement type. The fact that these are not easily quantified does not lessen their importance; in fact these factors may be the overriding reason for making the final pavement type selection. These decision factors should be carefully reviewed and considered, by WSDOT engineers most knowledgeable of the corridor and the surrounding environment.

When reporting the project specific details for pavement type selection, the Region must not use reasoning or examples that have already been taken into account within the pavement design analysis or the life cycle cost analysis. Examples of reasoning that should not be presented in the project specific details include:

1. Availability of funds for the more expensive pavement type.
2. Supporting the choice for pavement type based on ESALs or average daily traffic (ADT) that has already accounted for in the life cycle cost analysis.
3. Supporting the choice for pavement type based on user delay that has already accounted for in the life cycle cost analysis.

The Region should include the engineering reasons that suggest the selection of one pavement type over another, given that their life cycle costs are approximately equivalent.. Not all factors will come into play on every project, nor will all factors have equal weight or importance on each project. Refer to Appendix 6 for a listing of these considerations.

## APPENDIX 2 – DOWEL BAR TYPE SELECTION

Dowel bars in portland cement concrete (PCC) pavement have been proven to extend pavement life. Dowel bars transfer loads from panel to panel, supplementing the aggregate interlock at the panel joint. Aggregate interlock degrades over time, while dowel bars are expected to continue to be effective for upwards of 50 years. WSDOT designs PCC pavements to last 50 years, so it is critical that the dowel bars remain intact and functional, for this period.

Different materials used for dowel bars have different performance lives, given various exposures to weather and corrosive chemicals. The hardest environment for Dowel bars are wet locations with exposure to salts/corrosive agents (either naturally from the environment, such as sea spray, or from chemical anti-icing compounds). Dowel bars placed in dry climates without exposure to salts/corrosive agents experience the mildest environment. For the same moisture and salt/corrosive environment, warmer climates would induce more corrosion than colder environments.

The purpose of the dowel bar type selection process is to balance risk and cost. In an unconstrained funding scenario, one would select the least risky dowel bar material: one most resistant to corrosion. Unfortunately, WSDOT will always be under some type of funding constraint. Risk and cost, for each type of dowel bar material, is illustrated in the following table:

Dowel Bar Type	Cost	Corrosion Resistance
Solid stainless steel	Most expensive	Best corrosion resistance
Stainless steel clad	↓	↓
Stainless steel sleeve with epoxy coated insert	↓	↓
MMFX-2 steel (patented steel bar) and Jarden Lifejacket® dowel bar (zinc clad dowel bar)	↓	↓
Epoxy coated (AASHTO M-284)	↓	↓
Black steel (uncoated)	Least expensive	Worst corrosion resistance

Corrosion resistance increases as does cost when moving from black steel to stainless steel dowels. Additionally, there is a direct link, then, between risk and cost: less risk, higher cost; lowest cost, greatest risk of corrosion before 50 years.

### Climate

Wet climates promote corrosion in steel more than drier climates. In general, western Washington has the greatest potential for exposure to moisture in PCC pavements. Most of eastern Washington is considerably drier, experiencing more snow but less rainfall and less overall moisture.

### Corrosion

PCC pavement directly adjacent to salt water has a high-risk exposure to corrosive salts. Fortunately, little PCC pavement has this type of exposure in Washington State. The greatest exposure to corrosive salts will be in locations where the highway is regularly treated with salts/corrosive agents during the winter months. Mountain passes, particularly those with “clear pavement” requirements (wherein Maintenance maintains the highway in a snow/ice free condition) will have the greatest exposure.

## Traffic Loading

Trucks present the greatest loading risk for load transfer between adjacent PCC pavement panels. Truck lanes (usually Lane 1 (rightmost lane) or Lane 2, depending on the total number of lanes) will have the greatest number of ESALs. Risk of load transfer failure increases with increasing ESALs. Lanes with the greatest truck traffic will need more dowels to ensure efficient load transfer. On multi-lane highways, the travel lanes (Lanes 3, 4 or 5) will typically have much fewer trucks. These lanes can be designed with fewer dowel bars per lane and still reach a 50-year pavement life.

## DOWEL BAR ALTERNATIVES

### 1. Stainless Steel

- Solid stainless. Solid stainless bars are not recommended at this time due to their high initial cost.
- Stainless steel clad. These bars employ a patented manufacturing process that metallurgically bonds ordinary steel and stainless steel.
- Stainless steel sleeves with an epoxy coated dowel bar insert. These bars have an epoxy-coated bar that is inserted into a thin walled stainless steel tube.

### 2. MMFX-2 and Zinc Clad

- MMFX-2<sup>5</sup> steel dowel bars. These bars are high chromium but below the threshold to be classified as stainless. In addition, these bars have a dual phase steel microstructure that resists corrosion. Currently patented and manufactured by MMFX Steel Corporation (USA).
- Zinc clad dowel bar supplied by Jarden Zinc Products<sup>6</sup>. This dowel bar is produced by mechanically bonding a solid zinc strip to a standard steel dowel bar. The zinc layer provides two-fold protection: (1) surface barrier to minimize chloride attack and (2) cathodic protection.

### 3. Epoxy Coated

- Epoxy coated. Traditional black steel bars with epoxy coating (ASTM A 934)

## Application of Dowel Bar Type Selection

### 1. New Construction

The only Dowel Bar Alternatives allowed under new construction are stainless steel alternates, MMFX-2 and Zinc Clad. Epoxy coated dowel bars are allow for the construction of concrete intersections.

Dowel Bar Spacing:

- Truck lanes (lanes 1 and 2 in multi-lane highways): Eleven dowel bars per joint, first dowel bar is located 12 inches from lane edge and spaced on 12 inch centers.
- Non-truck lanes (Lanes 3, 4 or 5 in multi-lane highways): Eight dowel bars per joint (four in each wheel path), first and last dowel bar is located 12 inches from lane edge and spaced on 12 inch centers.
- HOV lanes: Eight dowel bars per joint (four in each wheel path), first and last dowel bar is located 12 inches from lane edge and spaced on 12 inch centers.

Note: The design for HOV lanes assumes these will remain as HOV lanes. The designer/engineer of record should carefully examine the potential future use of the HOV lanes to estimate the risk of this lane being converted to use by truck traffic. If there is a significant risk of the HOV lane being converted to a truck traffic lane, then the eleven dowel bars per joint configuration should be used.

---

<sup>5</sup> MMFX Technologies Corporation - <http://www.mmfex.com/>

<sup>6</sup> Jarden Zinc Products - <http://www.jardenzinc.com/>

- Widened truck or outside lanes: Where 14 foot wide panels are used (12 foot land and 2 foot widened shoulder). Dowels are required for the widened shoulder located 12 inches from lane edge and spaced on 12 inch centers.
- Concrete Intersections: Eight dowels per joint, four in each wheel path, first and last dowel bar is located 12 inches from lane edge and spaced on 12 inch centers.

## 2. **Dowel Bar Retrofit (DBR) and Panel Replacement projects:**

Dowel Bar Alternatives: Stainless steel alternatives, MMFX-2, Zinc Clad and epoxy coated

- DBR projects are projected to have useful lives of about 15 years, reducing the need for corrosion resistant dowel bars. Any of the dowel bar alternatives may be used. Dowel bar spacing remains three bars per wheel path regardless of the dowel type.
- Panel replacement projects may use any of the dowel bar alternatives.

## 3. **Dowel Bar Specifications**

The 2010 WSDOT Standard Specifications include the current dowel bar specifications:

- Section 5-01 - Cement Concrete Pavement Rehabilitation (Requirements)
- Section 5-05 - Cement Concrete Pavement (Requirements)
- Section 9-07.5 - Dowel Bars (Materials)

## APPENDIX 3 – EXAMPLE PAVEMENT TYPE SELECTION REPORT



Washington State  
Department of Transportation

Memorandum

June 8, 2009

TO: J. C. Lenzi  
Chief Engineer  
Assistant Secretary of Engineering and Regional Operations

FROM: Jeff Uhlmeyer  
(360) 709-5485

SUBJECT: SR 704, MP 0.00 to MP 6.00 VIC  
Cross Base Highway  
**Pavement Type Selection Protocol Analysis**

Attached for your signature is the Pavement Type Selection Committee approval form for SR 704, Cross Base Highway. Please return the completed approval to the State Materials Lab.

This approval is according to the procedure for activating the Pavement Type Selection Committee. The procedure is described in the attached June 29, 2004 letter (copy included for each committee member) approved by J. C. Lenzi. If you need clarification or have comments please call Jeff Uhlmeyer at 709-5485.

JU:ctk  
JU

cc: Jeff Carpenter, Director of Project Control and Reporting, 47325  
Pasco Bakotich, State Design Engineer, 47329  
Tom Baker, State Materials Engineer, 47365  
Kevin Dayton, Olympic Region Administrator, 47440



## Memorandum

June 8, 2009

TO: J. C. Lenzi, 47315  
Chief Engineer  
Assistant Secretary of Engineering and Regional Operations

FROM: Tom Baker, 47365  
State Materials Engineer

SUBJECT: Pavement Type Selection

When the pavement type selection has been completed and forwarded to the State Materials Laboratory, the Pavement Division will formulate the Pavement Type Selection Committee (referred to as the Committee) Approval Letter and request that each member of the Committee sign and forward the letter on to the next member. The Committee is not required to convene if the life cycle cost analysis between the alternatives is greater than 15 percent and the recommendations are acceptable to both the Region and the State Materials Laboratory. The Approval Letter shall provide the necessary documentation that supports the Committee's selection of the pavement type.

Projects to be reviewed shall be distributed to the Committee members for approval (see attached example of Approval Letter). Based on this review and obtaining consensus from the Committee, the Pavement Division will either process the Approval Letter, take appropriate action to obtain consensus, or convene the Committee.

In order to expedite the required time and expended level of effort for the review of pavement type selection projects, the following procedure is recommended:

1. The Committee should convene if the pavement type recommended by the Region is contrary to pavement design and engineering analysis recommendations. The pavement design and engineering analysis recommendations shall be subject to the review of the Pavement Division or any member of the Committee. Under these circumstances it shall be the responsibility of the Pavements Division or the Committee member to formulate, in writing, why the selected pavement type is not appropriate and distribute his/her rationale to all members. If all members agree with the recommendations a meeting will not be necessary, otherwise, the Committee should convene.
2. The Committee should convene at the request of any member.

TEB: jsu



**PAVEMENT TYPE SELECTION**

**SR 704**

**Cross Base Highway**

**MP 0.00 to MP 6.00 Vicinity**

The Pavement Type Selection Committee has completed its review of the pavement type selection for project SR 704 Cross Base Highway located in central Pierce County.

This project consists of constructing a new six-mile long East-West divided highway connecting Interstate 5 at Thorne Lane and State Route 7 at 176<sup>th</sup> Street. The proposed roadway section will consist of two Eastbound and two Westbound 12-ft. lanes with 4-ft. inside and 10-ft. outside shoulders. The design allows for the addition of future HOV lanes in the median.

Following the procedure in the Pavement Type Selection Protocol, the analysis indicates the following:

- I. **Pavement Design Analysis.** There are no pavement design issues. Both Hot Mix Asphalt (HMA) and Portland Cement Concrete (PCC) are viable alternatives.
- II. **Life Cycle Cost Analysis.** The HMA cost is 50-53% less than PCC. HMA is the selected option.
- III. **Engineering Analysis.** Not performed. The Life Cycle Cost difference is greater than 15% between the two pavement types.

The Committee based on this analysis approves the use of HMA on this project.

**The Pavement Type Selection Committee**

\_\_\_\_\_  
Chief Engineer  
Assistant Secretary of Engineering and  
Regional Operations

\_\_\_\_\_  
State Design Engineer

\_\_\_\_\_  
State Materials Engineer

\_\_\_\_\_  
Director of Project Control and Reporting

\_\_\_\_\_  
Olympic Region Administrator

JU:ck



# **SR 704 - Cross Base Highway**

## **Pavement Type Selection Protocol Analysis**

**October 28, 2005**


*Example*

**PREPARED BY:**

Mel Hitzke, PE - Olympic Region Materials Lab  
Terry MacAuley, Olympic Region Materials Lab

**REVIEWED BY:**

Jeff Uhlmeyer, PE – State Materials Lab – Pavements Division  
Chuck Kinne, PE – State Materials Lab – Pavements Division



## Pavement Type Selection Overview

The purpose of this document is to evaluate and recommend either a hot mix asphalt (HMA) pavement or Portland cement concrete (PCC) pavement for SR 704-Cross Base Highway. The Washington State Department of Transportation (WSDOT) Pavement Type Selection Protocol will be used to compare and evaluate these two alternatives. The Protocol requires that a pavement type be selected based on the evaluation of three primary areas: pavement design, life cycle cost and project specific externalities.

### SR 704 Project

The SR 704 Cross Base Highway Project is located in central Pierce County. This project will create a new six-mile long, East-West connection between I-5 at Thorne Lane (MP 123.5) and SR 7 at 176th St. (MP 48.3). The proposed multi-lane highway will consist of (4) 12-ft. lanes, 46-ft. wide median, 4-ft. inside shoulders and 10-ft. outside shoulders. The project is designed to provide for future HOV lanes in the median.

## I. Pavement Design Analysis

### 1. Foundation Analysis and Results

Soils within the projects limits are non-plastic medium dense, well-graded gravel with sand to poorly graded sand with gravel. Based on these favorable soil conditions, both HMA and PCC pavements are viable.

### 2. HMA Design Alternative

The HMA alternative includes 0.80-ft. of HMA Class 1/2" placed over 0.67-ft. Crushed Surfacing Base Course (CSBC) as shown in Figure A3.1. The inside shoulder is full depth to facilitate the addition of the future HOV lanes (see Appendix 3-A).

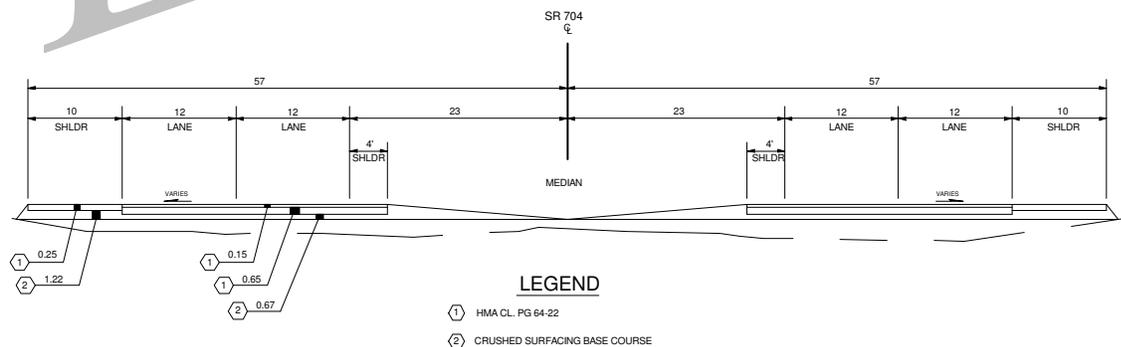


Figure A3.1

### 3. HMA Rehabilitation

A historical analysis of state routes in the vicinity of the proposed project with similar AADT and truck percentage was performed to determine pavement rehabilitation cycles. Based on the WSPMS data a 13-year rehabilitation cycle was selected (see Appendix 3-B, Table A3-B.1).


The rehabilitation cycles are scheduled for 2021, 2034 and 2047. The 2021 and 2047 rehabilitation cycles are full width (edge of paved shoulder (EPS) to EPS) 0.15-ft. HMA overlays. The 2034 rehabilitation is a 0.15-ft. HMA grind and inlay (Edge of Pavement (EP) to EP) with the fog sealing of shoulders. A summary of the construction and rehabilitations are shown in Table A3.1.

**Table A3.1. HMA Construction and Rehabilitation Summary**

Construction Category	Year	Description
Initial Construction (2008)	0	Construct 2 (12-ft.) lanes in each direction  <b>Traveled Lanes and Left Shoulder</b> 0.80-ft. HMA Class 1/2" 0.67-ft. CSBC  <b>Right Shoulder</b> 0.25-ft. HMA Class 1/2" 1.22-ft. CSBC
Rehabilitation #1 (2021)	13	Overlay EPS to EPS with 0.15-ft. HMA Class 1/2"
Rehabilitation #2 (2034)	26	Grind & Inlay lanes EP to EP with 0.15-ft. HMA Class 1/2" and fog sealing of shoulders
Rehabilitation #3 (2047)	39	Overlay EPS to EPS with 0.15-ft. HMA Class 1/2"

**4. PCC Design Alternative**

The PCC alternative includes 1.00-ft. of PCC (0.05-ft. PCC added for future diamond grind) over 0.30-ft. HMA base placed over 0.30-ft. CSBC as shown in Figure A3. 2. Both the inside and outside shoulders would be constructed with 0.35-ft. HMA Class 1/2" placed over 1.25-ft. CSBC. The HMA shoulder section has been increased from 0.25-ft. to 0.35-ft. to allow for section loss from future diamond grinding of the PCC. The additional HMA depth will also provide sufficient support when a temporary traffic shift is required for the addition of HOV lanes (see Appendix 3-A).

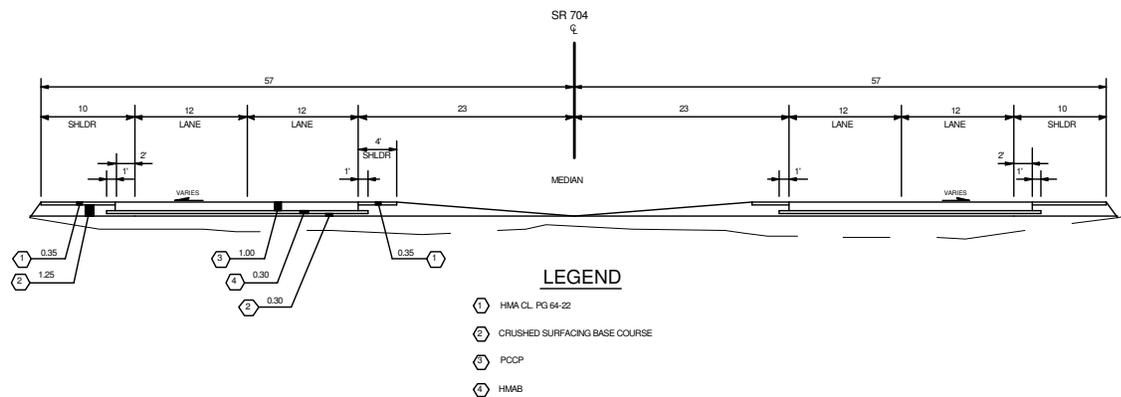

**Figure A3.2**

**5. PCC Rehabilitation**

The 30-year rehabilitation cycles were selected by conducting a historical analysis from state routes in the vicinity with similar AADT's and truck percentages (see Appendix 3-B, Table A3-B.2).

Only one rehabilitation cycle is scheduled for 2038 to diamond grind the wearing surface, clean and reseal all joints and cracks. A summary of the construction and rehabilitation is shown in Table A3.2.

**Table A3.2. PCC Construction and Rehabilitation Summary**

Construction Category	Year	Description
Initial Construction (2008)	0	Construct 2 (12 ft.) lanes each direction  <b>Mainline</b> 1.00-ft. PCC 0.30-ft. HMA base 0.30-ft. CSBC  <b>Shoulders</b> 0.35-ft. HMA Class 1/2" 1.25-ft. CSBC
Rehabilitation #1 (2038)	30	PCC grinding, cleaning, reseal joints and cracks

## II. Life Cycle Cost Analysis (LCCA)

### 1. The LCCA is based on the following parameters:

- **Roadway Section:** A one-mile section of roadway located between MP 3 and 4 was chosen to represent a typical section.
- **Economic Variables:** Estimated initial construction costs, future rehabilitation costs and user costs for this analysis are in 2005 dollars using a 4% discount rate.
- **Traffic Data:** The initial traffic volume of 15,000 ADT and annual growth factor of 1.92% were provided from a consulting firm contracted by the Olympia Design Office.  
Initial construction will not have traffic; therefore, no user cost will be assessed.
- **Truck Percentage**
  - Single Unit Trucks (4.0%)
  - Combination Trucks (6.0%)
- **Free Flow Capacity:** The LCCA software calculated a Free Flow Capacity of 2137 based on the Transportation Research Board's "1994 Highway Capacity Manual".
- **Traffic Speed during Work Zone Conditions:** A 40 mph reduced speed limit was used during the work zone lane closure periods.
- **Functional Classification:** This highway was assigned a "Rural" functional classification due to its location and population density.
- **Queue Dissipation Capacity:** Queue Dissipation Capacity of 1,818 passenger cars/lane/hour was used for all rehabilitation cycles on both alternatives.
- **Maximum ADT (Both Directions):** The ADT for this analysis was capped at 140,000.
- **Maximum Queue Length (Miles):** On this project, a maximum queue length of 2.0 miles was assumed.
- **Work Zone Capacity:** The work zone capacity of 1,340 vehicles per hour per lane (vphpl) was used during lane closure periods.

- **Day-time/Night-time Lane Closures:** This hourly input is based on a 24-hour clock and marks the beginning and ending hours when a lane reduction will be in place during construction activities:
  - Day-time
    - **Inbound:** 9:00 a.m. start time of lane closure and 5:00 p.m. for the reopening time.
    - **Outbound:** 6:00 a.m. start time of lane closure and 3:00 p.m. for the reopening time.
  - Night-time
    - **Inbound:** 7:00 p.m. start time of lane closure and 5:00 a.m. for the reopening time.
    - **Outbound:** 7:00 p.m. start time of lane closure and 5:00 a.m. for the reopening time.

## 2. Estimates

The initial construction and future rehabilitation estimated costs were based on past WSDOT project bidding and do not represent the actual estimated cost to complete the project. Only items directly related to pavement construction are included (see Appendix 3-C).

## 3. LCCA Analysis Software

Real Cost Version 2.2.0 software was used to perform the analysis (see Appendix 3-D).

## 4. Results of LCCA

The Probabilistic Daytime and Nighttime results are shown in Tables A3.3 and A3.4 and the Deterministic in Tables A3.5 and A3.6 Table A3.7 is a summary for a side-by-comparison of the results and percent difference. The costs shown here represent the analyzed one-mile section and not the entire 6 mile project length.

**Table A3.3. Probabilistic Results for Day Work Rehabilitation**

Total Cost (present value)	Alternative 1: HMA			Alternative 2: PCC		
	Agency Cost (\$1000)	User Cost (\$1000)	Sum	Agency Cost (\$1000)	User Cost (\$1000)	Sum
Mean	\$2,353.55	\$171.50	\$2,525.05	\$3,600.84	\$193.05	\$3,793.89
Standard Deviation	\$190.06	\$111.66	\$301.72	\$332.74	\$131.70	\$464.44
Minimum	\$1,821.65	\$9.16	\$1,830.81	\$2,589.55	\$5.81	\$2,595.36
Maximum	\$3,033.05	\$545.74	\$3,578.79	\$4,660.71	\$607.78	\$5,268.49

**Table A3.4. Probabilistic Results for Night Work Rehabilitation**

Total Cost (present value)	Alternative 1: HMA			Alternative 2: PCC		
	Agency Cost (\$1000)	User Cost (\$1000)	Sum	Agency Cost (\$1000)	User Cost (\$1000)	Sum
Mean	\$2,353.55	\$43.89	\$2,397.44	\$3,600.84	\$37.72	\$3,638.56
Standard Deviation	\$190.06	\$74.98	\$265.04	\$332.74	\$68.49	\$401.23
Minimum	\$1,821.65	\$4.60	\$1,826.25	\$2,589.55	\$2.92	\$2,592.47
Maximum	\$3,033.05	\$656.55	\$3,689.60	\$4,660.71	\$980.70	\$5,641.41

**Table A3.5. Deterministic Results for Day Work Rehabilitation**

Total Cost	Alternative 1: HMA			Alternative 2: PCC		
	Agency Cost (\$1000)	User Cost (\$1000)	Sum	Agency Cost (\$1000)	User Cost (\$1000)	Sum
Undiscounted Sum	\$2,879.69	\$559.78	\$3,439.47	\$3,833.67	\$544.86	\$4,378.53
Present Value	\$2,350.10	\$171.47	\$2,521.57	\$3,609.56	\$213.65	\$3,823.21
EUAC	\$109.40	\$7.98	\$117.38	\$168.03	\$9.95	\$177.98

**Table A3.6. Deterministic Results for Night Work Rehabilitation**

Total Cost	Alternative 1: HMA			Alternative 2: PCC		
	Agency Cost (\$1000)	User Cost (\$1000)	Sum	Agency Cost (\$1000)	User Cost (\$1000)	Sum
Undiscounted Sum	\$2,879.69	\$51.71	\$2,931.40	\$3,833.67	\$21.30	\$3,854.97
Present Value	\$2,350.10	\$15.58	\$2,365.68	\$3,609.56	\$8.35	\$3,617.91
EUAC	\$109.40	\$0.73	\$110.13	\$168.03	\$0.39	\$168.42

**Table A3.7. Summary of LCCA Results**

Analysis	Timing	HMA Alternative (\$1000)	PCC Alternative (\$1000)	Percent Difference
Probabilistic (mean present value)	Day	\$2,525.05	\$3,793.89	-50%
	Night	\$2,397.44	\$3,638.56	-52%
Deterministic (present value)	Day	\$2,521.57	\$3,823.21	-52%
	Night	\$2,365.68	\$3,617.91	-53%

### **III. Project specific externalities**

Identification of project specific externalities is not required, since the cost difference between HMA and PCC alternatives is greater than 15%. The HMA alternative is between 50 and 53 % less than the PCCP alternative for all cases. The Olympic Region recommends the use of HMA for constructing SR 704. Use of HMA represents a substantial savings to WSDOT.

Example

## APPENDIX 3-A – PAVEMENT DESIGN



Washington State  
Department of Transportation

Memorandum

May 12, 2005

TO: Linda Pierce/Jeff Uhlmeyer, 4-7365

FROM: Mel Hitzke, 4-7440

SUBJECT: SR 704 Cross-Base Highway  
XL-2117  
Surfacing Recommendations

This is the Olympic Region Materials surfacing recommendations for the SR 704 Cross-Base Highway located in central Pierce County. This project will create a new six-mile long, East-West connection between I-5 at Thorne Lane and SR 7 at 176<sup>th</sup> Street. The proposed multi-lane highway will consist of (4) 12-ft. lanes, 46-ft. median, 4-ft. inside shoulders and 10-ft. outside shoulders. The project is designed to provide for future HOV lanes in the median.

The estimated 50-year design ESAL's for this project are 77 million. Based on 90% lane distribution, 70 million ESAL's were used in the pavement design program DARWIN for determining the HMA surfacing depth. The attached ESAL calculations are based on traffic data provided by the Olympia Design Office. The PCC surfacing depths were taken from the WSDOT Pavement Guide, Volume 1, September 2004 Edition, Table 16, using design period ESAL's greater than 50 million with 85% reliability.

The roadway generally follows the existing ground contour with shallow cuts and fills with the exception of a 0.75-mile section on fill ranging from 10-30 feet. The soil classification in this area varies from medium dense, well-graded GRAVEL with sand, to medium dense, poorly graded SAND with gravel. Given these soil parameters it is estimated the R-Value for this area will range from 50-60. A subgrade resilient modulus of 15,000 psi was selected for use in the DARWIN layered thickness design program.

We request that Headquarters Materials Lab review and concur with the following recommendations:

This memo addresses surfacing depths for both flexible and rigid pavement types used in the life cycle cost analysis for this project.

Linda Pierce/Jeff Uhlmeier, 4-7365  
SR 704 Cross-Base Highway XL-2117  
May 12, 2005  
Page 2

**RECOMMENDATIONS:**

**Flexible Pavement**

Mainline and Left Shoulder                      Right Shoulder

0.80-ft. HMA ½" (PG 64-22)	0.25-ft. HMA ½" (PG 64-22)
0.67-ft. CSBC	1.22-ft. CSBC

The inside shoulder is full depth to facilitate the addition of the future HOV without the need to temporarily shift traffic during construction.

**Rigid Pavement**

Mainline    Shoulders


1.00-ft. PCCP	0.35-ft. HMA ½" (PG 64-22)
0.30-ft. HMAB	1.25-ft. CSBC
0.30-ft. CSBC	

**Notes:**

0.05-ft. PCCP added for future diamond grind.

HMA shoulder section has been increased from 0.25-ft. to 0.35-ft. to allow for section loss from future diamond grinding of the PCCP. The additional HMA depth will also provide sufficient support when a temporary traffic shift is required for the addition of HOV lanes.

A LCCA utilizing the recommended surfacing depths will be conducted for this project as required by the "Pavement Type Selection Protocol".

  
Jeff Uhlmeier  
Pavement Design Engineer

5-12-05  
Date

MH:tm  
TM

cc: Gordon Roycroft/Mary Lou Nebergall, 4-7445  
OR Program Management, 4-7440



EXPIRES 1-21-06

## APPENDIX 3-B – DOCUMENTATION FOR HMA PERFORMANCE LIFE

Table A3-B.1. HMA Rehabilitation Cycle Determination

Section 2003 ADI, Truck %	8R 6 MB				8R 6 8B				8R 167 MB		8R 167 8B		8R 167 8B	
	ADT 68 K, 12.4% Trucks				ADT 68 K, 12.4% Trucks				ADT 47 K, 8.4% Trucks		ADT 47 K, 8.4% Trucks		ADT 47 K, 8.4% Trucks	
	MP	MP	MP	MP	MP	MP	MP	MP	MP	MP	MP	MP	MP	MP
Year	118.42	120.27	120.27	120.87	118.00	120.00	120	122.83	8.84	MP 7.22	MP 7.82	MP 8.82	MP 8.72	MP 8.83
1954														
1955														
1956														
1957	0.33' Overlay				0.33' Overlay									
1958	13				13									
1959														
1960														
1961														
1962														
1963														
1964														
1965														
1966														
1967														
1968														
1969														
1970	0.25' Overlay				0.25' Overlay		0.25' Overlay							
1971	17				14									
1972														
1973														
1974														
1975														
1976														
1977														
1978														
1979														
1980	0.25' Overlay				0.08' Overlay		0.08' Overlay							
1981	15				15									
1982														
1983														
1984														
1985														
1986														
1987														
1988														
1989														
1990														
1991														
1992														
1993														
1994														
1995	0.15' Inlay				0.15' Overlay		0.15' Overlay							
1996	12				15									
1997														
1998														
1999														
2000														
2001														
2002														
2003														
2004														
2005														
Legend	HMA Depth	Years Between Rehab		Average	13.8	Std Dev	2.4							

Table A3-B.2. PCC Rehabilitation Cycle Determination

Section	SR 5 NB		SR 5 SB		SR 5 NB & SB		SR 5 NB & SB	
2003 ADT, Truck %	ADT 50K, 10.3% Trucks		ADT 50K, 10.3% Trucks		ADT + 100K, 8.0% Trucks		ADT + 100K, 8.0% Trucks	
Year	MP	MP	MP	MP	MP	MP	MP	MP
	109.17	116.79	109.14	114.51	128.08	130.58	132.88	134.1
1959					New Constr			
1960								
1961								
1962								
1963								
1964								
1965								
1966							New Constr	
1967								
1968								
1969	New Constr		New Constr					
1970								
1971								
1972								
1973								
1974								
1975								
1976								
1977								
1978								
1979					39			
1980								
1981								
1982								
1983	24							
1984			28					
1985								
1986							38	
1987								
1988								
1989								
1990								
1991								
1992								
1993								
1994								
1995								
1996	DBR, Diamond Grind							
1997								
1998			DBR, Diamond Grind					
1999					DBR, Diamond Grind			
2000								
2001								
2002								
2003								
2004								
2005								
Legend	PCCP		Year Between Rehabil					
	Average	32.8	Std Dev	6.7				

## APPENDIX 3-C – COST ESTIMATES

**Table A3-C.1 Construction Items and Unit Prices**

Unit	Item	Price
<b>SURFACING</b>		
Ton	Crushed Surfacing Base Course	\$15.00
<b>CEMENT CONCRETE PAVEMENT</b>		
SY	Portland Cement Concrete Pavement Grinding	\$9.00
L.F.	Clean and Seal Random Cracks	\$11.00
L.F.	Clean and Reseal Concrete Joints	\$2.20
CY	Cement Concrete Pavement (Excluding Dowel Bars)	\$160.00
2%	Ride Smoothness Compliance Adjustment	2%
Each	Stainless Steel Dowel Bars	\$15.00
L.F.	Longitudinal Joint Seal	\$2.00
<b>ASPHALT</b>		
Ton	HMA CL 3/4" PG 64-22	\$45.00
Ton	HMA CL 1/2" PG 64-22	\$45.00
Ton	Anti Stripping Additive	\$1.00
2%	Compaction Price Adjustment (HMA CL 1/2" PG 64-22)	2%
2%	Compaction Price Adjustment (HMA CL 3/4" PG 64-22)	2%
3%	Job Mix Compliance (HMA CL 1/2" PG 64-22)	3%
3%	Job Mix Compliance (HMA CL 3/4" PG 64-22)	3%
SY	Planning Bituminous Pavement	\$2.00
Ton	Asphalt For Fog Seal	\$265.00
<b>TRAFFIC</b>		
Day	Traffic Control Labor (4 people, 10 hrs./day)	\$1,400.00
Day	Traffic Control Supervisor	\$320.00
Day	Traffic Control Vehicle	\$70.00
<b>MISCELANEOUS</b>		
LS	Mobilization	5%
EST	Engineering and Contingencies	15%
EST	Preliminary Engineering	10%
EST	Sales Tax	8.4%

**Table A3-C.2 Initial HMA Construction Year 2008**

Detail: New HMA Construction - Lanes and Left Shoulder (0.80 ft HMA CL 1/2" PG 64-22 and 0.67 ft CSBC),  
Right Shoulder ( 0.25 ft HMA CL 1/2" PG 64-22 and 1.22 ft CSBC)

Quantity	Unit	Bid Item	Unit Price	Amount
33,374	Ton	Crushed Surfacing Base Course	\$15.00	\$500,610
18,245	Ton	HMA CL 1/2" PG 64-22	\$45.00	\$821,025
18,245	Ton	Anti Stripping Additive	\$1.00	\$18,245
\$694,440	2%	Compaction Price Adjustment (HMA CL 1/2" PG 64-22, 18,245 Tons-No shoulders)	2%	\$13,889
\$821,025	3%	Job Mix Compliance (HMA CL 1/2" PG 64-22)	3%	\$24,631
Items Subtotal				\$1,378,400
Mobilization (5% of Items Subtotal)				\$68,920 Use same value on PCCP Mobilization
Contract Items Subtotal (Items Incl. Mobilization)				\$1,447,320
Sales Tax (8.4% of Contract Items Subtotal)				\$121,575 Use same value on PCCP Sales Tax
Contract Subtotal (Contract Items Incl. Sales Tax)				\$1,568,895
Engineering and Contingencies (15% of Contract Subtotal)				\$235,334 Use same value on PCCP Engineering and Contingencies
Total Construction Subtotal (Contract Incl. Engineering and Contingencies)				\$1,804,229
Preliminary Engineering (10% of Total Construction Subtotal)				\$180,423 Use same value on PCCP Preliminary Engineering
<b>Total Project Cost (Total Construction Incl. Preliminary Engineering)</b>				<b>\$1,984,652</b>

**Table A3-C.3 HMA Rehabilitation #1 Year 2021, #3 Year 2047**

**Detail: Overlay Shoulder to Shoulder 0.15 HMA CL 1/2" PG 64-22**

		Quantity					
150	Unit	Bid Item	Unit Price	Amount	Quantity Per Day	Days	
4,581	Ton	Crushed Surfacing Base Course	\$15.00	\$2,250			
4,581	Ton	HMA CL 1/2" PG 64-22	\$45.00	\$206,145	2,000	3	
\$130,185	Ton	Anti Stripping Additive	\$1.00	\$4,581			
\$206,145	2%	Compaction Price Adjustment (HMA CL 1/2" PG 64-22, 2,893 Tons-No shoulders)	2%	\$2,604			
	3%	Job Mix Compliance (HMA CL 1/2" PG 64-22)	3%	\$6,184			
3		<b>Construction Time</b>			<b>(Days)</b>	<b>3</b>	
3	Day	Traffic Control Labor (4 people, 10 hr/days @\$35/hr)	\$1,400.00	\$4,200			
3	Day	Traffic Control Supervisor	\$320.00	\$960			
Items Subtotal	Day	Traffic Control Vehicle	\$70.00	\$210			
		Mobilization (5% of Items Subtotal)		\$227,134			
		Contract Items Subtotal (Items Incl. Mobilization)		\$11,357			
		Sales Tax (8.4% of Contract Items Subtotal)		\$238,491			
		Contract Subtotal (Contract Items Incl. Sales Tax)		\$20,033			
		Engineering and Contingencies (15% of Contract Subtotal)		\$258,524			
		Total Construction Subtotal (Contract Incl. Engineering and Contingencies)		\$38,779			
		Preliminary Engineering (10% of Total Construction Subtotal)		\$297,303			
<b>Total Project Cost (Total Construction Incl. Preliminary Engineering)</b>				<b>\$29,730</b>			

**Table A3-C.4 HMA Rehabilitation #2 Year 2034**

**Detail: Grind and Inlay Fog Line to Fog Line 0.15 HMA CL 1/2" PG 64-22**

Quantity	Unit	Bid Item	Unit Price	Amount	Quantity Per Day	Days
2,893	Ton	HMA CL 1/2" PG 64-22	\$45.00	\$130,185	1,500	2
2,893	Ton	Anti Stripping Additive	\$1.00	\$2,893		
\$130,185	2%	Compaction Price Adjustment (HMA CL 1/2" PG 64-22)	2%	\$2,604		
\$130,185	3%	Job Mix Compliance (HMA CL 1/2" PG 64-22)	3%	\$3,906		
28,160	SY	Planning Bituminous Pavement	\$2.00	\$56,320		1
3.0	Ton	Asphalt For Fog Seal (Shoulders)	\$265.00	\$795		
<b>Construction Time</b>					<b>(Days)</b>	<b>3</b>
3	Day	Traffic Control Labor (4 people, 10 hr days)	\$1,400.00	\$4,200		
3	Day	Traffic Control Supervisor	\$320.00	\$960		
3	Day	Traffic Control Vehicle	\$70.00	\$210		
Items Subtotal				\$202,073		
Mobilization (5% of Items Subtotal)				\$10,104		
Contract Items Subtotal (Items Incl. Mobilization)				\$212,177		
Sales Tax (8.4% of Contract Items Subtotal)				\$17,823		
Contract Subtotal (Contract Items Incl. Sales Tax)				\$230,000		
Engineering and Contingencies (15% of Contract Subtotal)				\$34,500		
Total Construction Subtotal (Contract Incl. Engineering and Contingencies)				\$264,500		
Preliminary Engineering (10% of Total Construction Subtotal)				\$26,450		
<b>Total Project Cost ( Total Construction Incl. Preliminary Engineering)</b>				<b>\$290,950</b>		

**Table A3-C.5 Initial PCCP Construction Year 2008**

**Detail: PCCP New Construction 1.00 ft PCCP with Stainless Steel Dowel Bars on 0.30' HMA CL 3/4" PG 64-22 Base, 0.30' CSBC, Shoulder 0.35' HMA CL 1/2" PG 64-22 w/ 1.25' CSBC**

<b>Quantity</b>	<b>Unit</b>	<b>Bid Item</b>	<b>Unit Price</b>	<b>Amount</b>
10,169	CY	Cement Concrete Pavement (Excluding Dowel Bars)	\$160.00	\$1,627,040
14,120	EA	Stainless Steel Dowel Bars	\$15.00	\$211,800
50,036	L.F.	Longitudinal Joint Seal	\$2.00	\$100,072
\$1,627,040				
0	CALC	Ride Smoothness Compliance Adjustment	2%	\$32,541
27,176	Ton	Crushed Surfacing Base Course	\$15.00	\$407,640
6,751	Ton	HMA CL 3/4" PG 64-22	\$45.00	\$303,795
3,376	Ton	HMA CL 1/2" PG 64-22	\$45.00	\$151,920
10,127	Ton	Anti Stripping Additive	\$1.00	\$10,127
\$455,715	3%	Job Mix Compliance (HMA CL 3/4" PG 64-22 & HMA CL 1/2" PG 64-22)	3%	\$13,671
Items Subtotal				\$2,858,606
Use HMA's Initial Construction Mobilization				\$68,920
Contract Items Subtotal (Items Incl. Mobilization)				\$2,927,526
Use HMA's Initial Construction Sale Tax				\$121,575
Contract Subtotal (Contract Items Incl. Sales Tax)				\$3,049,101
Use HMA's Initial Construction Engineering and Contingencies				\$235,334
Total Construction Subtotal (Contract Incl. Engineering and Contingencies)				\$3,284,435
Use HMA's Initial Construction Preliminary Engineering				\$180,423
<b>Total Project Cost ( Total Construction Incl. Preliminary Engineering)</b>				<b>\$3,464,858</b>

**Table A3-C.6 PCCP Rehabilitation #1 Year 2038**

Detail: **Grind PCCP and Clean and Reseal Joints**

Quantity	Unit	Bid Item	Unit Price	Amount	Quantity Per Day	Days
28160	SY	Portland Cement Concrete Pavement Grinding	\$9.00	\$253,440	5,000	6
48624	L.F.	Saw Clean and Seal Concrete Joints	\$2.20	\$106,973	17,000	3
140	L.F.	Clean and Seal Random Cracks	\$11.00	\$1,540		
3.0	Ton	Asphalt For Fog Seal (Shoulders)	\$265.00	\$795		
253440	Calc	Ride Smoothness Compliance Adjustment	2%	\$5,069		
<b>Construction Time</b>					<b>(Days)</b>	<b>9</b>
9	Day	Traffic Control Labor (4 people, 10 hr days)	\$1,400.00	\$12,600		
9	Day	Traffic Control Supervisor	\$320.00	\$2,880		
9	Day	Traffic Control Vehicle	\$70.00	\$630		
				Items Subtotal	\$383,927	
				Mobilization (5% of Items Subtotal)	\$19,196	
				Contract Items Subtotal (Items Incl. Mobilization)	\$403,123	
				Sales Tax (8.4% of Contract Items Subtotal)	\$33,862	
				Contract Subtotal (Contract Items Incl. Sales Tax)	\$436,985	
				Engineering and Contingencies (15% of Contract Subtotal)	\$65,548	
				Total Construction Subtotal (Contract Incl. Engineering and Contingencies)	\$502,533	
				Preliminary Engineering (10% of Total Construction Subtotal)	\$50,253	
				<b>Total Project Cost ( Total Construction Incl. Preliminary Engineering)</b>	<b>\$552,786</b>	

## APPENDIX 3-D – LCCA WORKSHEETS

**Table A3-D.1 Economic Variables, Analysis Options, Project Details and Traffic**

<b>1. Economic Variables</b>	
Value of Time for Passenger Cars (\$/hour)	\$13.99
	<b>LCCATRIANG(12,13.96,16)</b>
Value of Time for Single Unit Trucks (\$/hour)	\$22.11
	<b>LCCATRIANG(20,22.34,24)</b>
Value of Time for Combination Trucks (\$/hour)	\$26.96
	<b>LCCATRIANG(25,26.89,29)</b>
<b>2. Analysis Options</b>	
Include User Costs in Analysis	Yes
Include User Cost Remaining Service Life Value	Yes
Use Differential User Costs	Yes
User Cost Computation Method	Calculated
Include Agency Cost Remaining Service Life Value	Yes
Traffic Direction	Both
Analysis Period (Years)	50
Beginning of Analysis Period	2008
Discount Rate (%)	4.0
	<b>LCCATRIANG(3,4,5)</b>
<b>3. Project Details and Quantity Calculations</b>	
State Route	SR 704
Project Name	Cross Base Highway
Region	Olympic Region
County	Pierce
Analyzed By	Terry MacAuley
Mileposts	
Begin	0.00
End	6.00
Length of Project (miles)	6.00
Comments	This project will create a new multi-lane East-West Highway, 6 miles long between I-5 at Thorne Lane
<b>4. Traffic Data</b>	
AADT Construction Year (total for both directions)	30,866
Cars as Percentage of AADT (%)	90.0
Single Unit Trucks as Percentage of AADT (%)	4.0
Combination Trucks as Percentage of AADT (%)	6.0
Annual Growth Rate of Traffic (%)	1.9
	<b>LCCANORMAL(1.92,1)</b>
Speed Limit Under Normal Operating Conditions (mph)	60
No of Lanes in Each Direction During Normal Conditions	2
Free Flow Capacity (vphpl)	2137
Rural or Urban Hourly Traffic Distribution	Rural
Queue Dissipation Capacity (vphpl)	1818
	<b>LCCANORMAL(1818,144)</b>
Maximum AADT (total for both directions)	140,000
Maximum Queue Length (miles)	2.0

**Table A3-D.2 Daytime HMA Alternative 1 Input Data**

<b>Initial Construction</b>	<b>Year 2008, Initial Construction</b>	
Agency Construction Cost (\$1000)	\$1,985.00	
	<b>LCCANORMAL(1985,198.5)</b>	
User Work Zone Costs (\$1000)		
Work Zone Duration (days)	0	
No of Lanes Open in Each Direction During Work	2	
Activity Service Life (years)	13.0	
	<b>LCCATRIANG(11,13,15)</b>	
Maintenance Frequency (years)		
Agency Maintenance Cost (\$1000)		
Work Zone Length (miles)	1.00	
Work Zone Speed Limit (mph)	40	
Work Zone Capacity (vphpl)	1340	
Time of Day of Lane Closures (use whole numbers based on a 24-hour clock)		
Inbound	Start	End
First period of lane closure		
Second period of lane closure		
Third period of lane closure		
Outbound	Start	End
First period of lane closure		
Second period of lane closure		
Third period of lane closure		
<b>Rehabilitation #1</b>	<b>Year 2021, Rehab # 1 - 0.15' HMA Overlay</b>	
Agency Construction Cost (\$1000)	\$327.00	
	<b>LCCANORMAL(327,32.7)</b>	
User Work Zone Costs (\$1000)		
Work Zone Duration (days)	3	
No of Lanes Open in Each Direction During Work	1	
Activity Service Life (years)	13.0	
	<b>LCCATRIANG(11,13,15)</b>	
Maintenance Frequency (years)		
Agency Maintenance Cost (\$1000)		
Work Zone Length (miles)	1.00	
Work Zone Speed Limit (mph)	40	
Work Zone Capacity (vphpl)	1340	
Time of Day of Lane Closures (use whole numbers based on a 24-hour clock)		
Inbound	Start	End
First period of lane closure	9	17
Second period of lane closure		
Third period of lane closure		
Outbound	Start	End
First period of lane closure	6	15
Second period of lane closure		
Third period of lane closure		

**Table A3-D.2 Daytime HMA Alternative 1 Input Data (cont.)**

<b>Rehabilitation #2</b>	Year 2034, Rehab # 2 - 0.15' HMA Inlay	
Agency Construction Cost (\$1000)	\$291.00	
	<b>LCCANORMAL(291,29.1)</b>	
User Work Zone Costs (\$1000)		
Work Zone Duration (days)	3	
No of Lanes Open in Each Direction During Work	1	
Activity Service Life (years)	13.0	
	<b>LCCATRIANG(11,13,15)</b>	
Maintenance Frequency (years)		
Agency Maintenance Cost (\$1000)		
Work Zone Length (miles)	1.00	
Work Zone Speed Limit (mph)	40	
Work Zone Capacity (vphpl)	1340	
Time of Day of Lane Closures (use whole numbers based on a 24-hour clock)		
Inbound	Start	End
First period of lane closure	9	17
Second period of lane closure		
Third period of lane closure		
Outbound	Start	End
First period of lane closure	6	15
Second period of lane closure		
Third period of lane closure		

<b>Rehabilitation #3</b>	Year 2047, Rehab # 3 - 0.15' HMA Overlay	
Agency Construction Cost (\$1000)	\$327.00	
	<b>LCCANORMAL(327,32.7)</b>	
User Work Zone Costs (\$1000)		
Work Zone Duration (days)	3	
No of Lanes Open in Each Direction During Work	1	
Activity Service Life (years)	13.0	
	<b>LCCATRIANG(11,13,15)</b>	
Maintenance Frequency (years)		
Agency Maintenance Cost (\$1000)		
Work Zone Length (miles)	1.00	
Work Zone Speed Limit (mph)	40	
Work Zone Capacity (vphpl)	1340	
Time of Day of Lane Closures (use whole numbers based on a 24-hour clock)		
Inbound	Start	End
First period of lane closure	9	17
Second period of lane closure		
Third period of lane closure		
Outbound	Start	End
First period of lane closure	6	15
Second period of lane closure		
Third period of lane closure		

**Table A3-D.3 Daytime PCCP Alternative 2 Input Data**

<b>Initial Construction</b>	<b>Year 2008, Initial Costruction</b>	
Agency Construction Cost (\$1000)	\$3,465.00	
	<b>LCCANORMAL(3465,346.5)</b>	
User Work Zone Costs (\$1000)		
Work Zone Duration (days)	0	
No of Lanes Open in Each Direction During Work	2	
Activity Service Life (years)	30.0	
	<b>LCCATRIANG(25,30,35)</b>	
Maintenance Frequency (years)		
Agency Maintenance Cost (\$1000)		
Work Zone Length (miles)	1.00	
Work Zone Speed Limit (mph)	60	
Work Zone Capacity (vphpl)	1340	
Time of Day of Lane Closures (use whole numbers based on a 24-hour clock)		
Inbound	Start	End
First period of lane closure		
Second period of lane closure		
Third period of lane closure		
Outbound	Start	End
First period of lane closure		
Second period of lane closure		
Third period of lane closure		
<b>Rehabilitation #1</b>	<b>Year 2038, Rehab #1 - Diamond Grind, Reseal Joints, Repair Panels</b>	
Agency Construction Cost (\$1000)	\$553.00	
	<b>LCCANORMAL(553,55.3)</b>	
User Work Zone Costs (\$1000)		
Work Zone Duration (days)	9	
No of Lanes Open in Each Direction During Work	1	
Activity Service Life (years)	30.0	
	<b>LCCATRIANG(25,30,35)</b>	
Maintenance Frequency (years)		
Agency Maintenance Cost (\$1000)		
Work Zone Length (miles)	1.00	
Work Zone Speed Limit (mph)	40	
Work Zone Capacity (vphpl)	1340	
Time of Day of Lane Closures (use whole numbers based on a 24-hour clock)		
Inbound	Start	End
First period of lane closure	9	17
Second period of lane closure		
Third period of lane closure		
Outbound	Start	End
First period of lane closure	6	15
Second period of lane closure		
Third period of lane closure		

**Table A3-D.4 Daytime Deterministic Results**

Total Cost	Alternative 1: HMA Roadway (Day Time)		Alternative 2: PCCP Roadway (Day Time)	
	Agency Cost (\$1000)	User Cost (\$1000)	Agency Cost (\$1000)	User Cost (\$1000)
Undiscounted Sum	\$2,879.69	\$559.78	\$3,833.67	\$544.86
Present Value	\$2,350.10	\$171.47	\$3,609.56	\$213.65
EUAC	\$109.40	\$7.98	\$168.03	\$9.95

**Table A3-D.5 Daytime Probabilistic Results**

Total Cost (Present Value)	Alternative 1: HMA Roadway (Day Time)		Alternative 2: PCCP Roadway (Day Time)	
	Agency Cost (\$1000)	User Cost (\$1000)	Agency Cost (\$1000)	User Cost (\$1000)
Mean	\$2,353.55	\$171.50	\$3,600.84	\$193.05
Standard Deviation	\$190.06	\$111.66	\$332.74	\$131.70
Minimum	\$1,821.65	\$9.16	\$2,589.55	\$5.81
Maximum	\$3,033.05	\$545.74	\$4,660.71	\$607.78

**Table A3-D.6 Nighttime HMA Alternative 1 Input Data**

<b>Initial Construction</b>	<b>Year 2008, Initial Construction</b>	
Agency Construction Cost (\$1000)	\$1,985.00	
	<b>LCCANORMAL(1985,198.5)</b>	
User Work Zone Costs (\$1000)		
Work Zone Duration (days)	0	
No of Lanes Open in Each Direction During Work	2	
Activity Service Life (years)	13.0	
	<b>LCCATRIANG(11,13,15)</b>	
Maintenance Frequency (years)		
Agency Maintenance Cost (\$1000)		
Work Zone Length (miles)	1.00	
Work Zone Speed Limit (mph)	40	
Work Zone Capacity (vphpl)	1340	
Time of Day of Lane Closures (use whole numbers based on a 24-hour clock)		
Inbound	Start	End
First period of lane closure		
Second period of lane closure		
Third period of lane closure		
Outbound	Start	End
First period of lane closure		
Second period of lane closure		
Third period of lane closure		

**Table A3-D.6 Nighttime HMA Alternative 1 Input Data – continued...**

<b>Rehabilitation #1</b>	Year 2021, Rehab # 1 - 0.15' HMA Overlay	
Agency Construction Cost (\$1000)	\$327.00	
	<b>LCCANORMAL(327,32.7)</b>	
User Work Zone Costs (\$1000)		
Work Zone Duration (days)	3	
No of Lanes Open in Each Direction During Work	1	
Activity Service Life (years)	13.0	
	<b>LCCATRIANG(11,13,15)</b>	
Maintenance Frequency (years)		
Agency Maintenance Cost (\$1000)		
Work Zone Length (miles)	1.00	
Work Zone Speed Limit (mph)	40	
Work Zone Capacity (vphpl)	1340	
Time of Day of Lane Closures (use whole numbers based on a 24-hour clock)		
Inbound	Start	End
First period of lane closure	19	24
Second period of lane closure	0	5
Third period of lane closure		
Outbound	Start	End
First period of lane closure	19	24
Second period of lane closure	0	5
Third period of lane closure		
<b>Rehabilitation #2</b>	Year 2034, Rehab # 2 - 0.15' HMA Inlay	
Agency Construction Cost (\$1000)	\$291.00	
	<b>LCCANORMAL(291,29.1)</b>	
User Work Zone Costs (\$1000)		
Work Zone Duration (days)	3	
No of Lanes Open in Each Direction During Work	1	
Activity Service Life (years)	13.0	
	<b>LCCATRIANG(11,13,15)</b>	
Maintenance Frequency (years)		
Agency Maintenance Cost (\$1000)		
Work Zone Length (miles)	1.00	
Work Zone Speed Limit (mph)	40	
Work Zone Capacity (vphpl)	1340	
Time of Day of Lane Closures (use whole numbers based on a 24-hour clock)		
Inbound	Start	End
First period of lane closure	19	24
Second period of lane closure	0	5
Third period of lane closure		
Outbound	Start	End
First period of lane closure	19	24
Second period of lane closure	0	5
Third period of lane closure		

**Table A3-D.6 Nighttime HMA Alternative 1 Input Data – continued...**

<b>Rehabilitation #3</b>	Year 2047, Rehab # 3 - 0.15' HMA Overlay	
Agency Construction Cost (\$1000)	\$327.00	
	<b>LCCANORMAL(327,32.7)</b>	
User Work Zone Costs (\$1000)		
Work Zone Duration (days)	3	
No of Lanes Open in Each Direction During Work	1	
Activity Service Life (years)	13.0	
	<b>LCCATRIANG(11,13,15)</b>	
Maintenance Frequency (years)		
Agency Maintenance Cost (\$1000)		
Work Zone Length (miles)	1.00	
Work Zone Speed Limit (mph)	40	
Work Zone Capacity (vphpl)	1340	
Time of Day of Lane Closures (use whole numbers based on a 24-hour clock)		
Inbound	Start	End
First period of lane closure	19	24
Second period of lane closure	0	5
Third period of lane closure		
Outbound	Start	End
First period of lane closure	19	24
Second period of lane closure	0	5
Third period of lane closure		

**Table A3-D.7 Nighttime PCCP Alternative 2 Input Data**

<b>Initial Construction</b>	Year 2008, Initial Construction	
Agency Construction Cost (\$1000)	\$3,465.00	
	<b>LCCANORMAL(3465,346.5)</b>	
User Work Zone Costs (\$1000)		
Work Zone Duration (days)	0	
No of Lanes Open in Each Direction During Work	2	
Activity Service Life (years)	30.0	
	<b>LCCATRIANG(25,30,35)</b>	
Maintenance Frequency (years)		
Agency Maintenance Cost (\$1000)		
Work Zone Length (miles)	1.00	
Work Zone Speed Limit (mph)	60	
Work Zone Capacity (vphpl)	1340	
Time of Day of Lane Closures (use whole numbers based on a 24-hour clock)		
Inbound	Start	End
First period of lane closure		
Second period of lane closure		
Third period of lane closure		
Outbound	Start	End
First period of lane closure		
Second period of lane closure		
Third period of lane closure		

**Table A3-D.7 Nighttime PCCP Alternative 2 Input Data – continued...**

<b>Rehabilitation #1</b>	<b>Year 2043 Rehab #1 - Diamond Grind, Reseal Joints, Repair Panels</b>	
Agency Construction Cost (\$1000)	\$553.00	
	<b>LCCANORMAL(553,55.3)</b>	
User Work Zone Costs (\$1000)		
Work Zone Duration (days)	9	
No of Lanes Open in Each Direction During Work	1	
Activity Service Life (years)	30.0	
	<b>LCCATRIANG(25,30,35)</b>	
Maintenance Frequency (years)		
Agency Maintenance Cost (\$1000)		
Work Zone Length (miles)	1.00	
Work Zone Speed Limit (mph)	40	
Work Zone Capacity (vphpl)	1340	
Time of Day of Lane Closures (use whole numbers based on a 24-hour clock)		
Inbound	Start	End
First period of lane closure	19	24
Second period of lane closure	0	5
Third period of lane closure		
Outbound	Start	End
First period of lane closure	19	24
Second period of lane closure	0	5
Third period of lane closure		

**Table A3-D.8 Nighttime Deterministic Results**

Total Cost	Alternative 1: HMA Roadway (Night Time Construction)		Alternative 2: PCCP Roadway (Night Time Construction)	
	Agency Cost (\$1000)	User Cost (\$1000)	Agency Cost (\$1000)	User Cost (\$1000)
Undiscounted Sum	\$2,879.69	\$51.71	\$3,833.67	\$21.30
Present Value	\$2,350.10	\$15.58	\$3,609.56	\$8.35
EUAC	\$109.40	\$0.73	\$168.03	\$0.39

**Table A3-D.9 Nighttime Probabilistic Results**

Total Cost (Present Value)	Alternative 1: HMA Roadway (Night Time Construction)		Alternative 2: PCCP Roadway (Night Time Construction)	
	Agency Cost (\$1000)	User Cost (\$1000)	Agency Cost (\$1000)	User Cost (\$1000)
Mean	\$2,353.55	\$43.89	\$3,600.84	\$37.72
Standard Deviation	\$190.06	\$74.98	\$332.74	\$68.49
Minimum	\$1,821.65	\$4.60	\$2,589.55	\$2.92
Maximum	\$3,033.05	\$656.55	\$4,660.71	\$980.70

## APPENDIX 4 – WSDOT PROBABILISTIC INPUTS

**Table A5.1 Input Probability Distributions Examples (FHWA).**

Distribution Type	Spreadsheet Formula	Illustration
Normal	lccanormal (mean, std dev)	<p>A bell-shaped curve representing a normal distribution. The peak is labeled 'mean'. A horizontal line from the peak to the right edge of the curve is labeled 'std dev'. The vertical axis is labeled 'Relative Probability'.</p>
Truncated Normal	lccatnormal (mean, std dev, lower bound, upper bound)	<p>A bell-shaped curve that is truncated at both ends. The peak is labeled 'mean'. A horizontal line from the peak to the right edge of the curve is labeled 'std dev'. The vertical axis is labeled 'Relative Probability'.</p>
Triangular	lccatriang (minimum, most likely, maximum)	<p>A triangle representing a triangular distribution. The peak is labeled 'most likely'. The base is labeled 'min' on the left and 'max' on the right. The vertical axis is labeled 'Relative Probability'.</p>
Uniform	lccauniform (minimum, most likely, maximum)	<p>A rectangle representing a uniform distribution. The base is labeled 'min' on the left and 'max' on the right. The vertical axis is labeled 'Relative Probability'.</p>
Triangular	lccatriang (minimum, most likely, maximum)	<p>A triangle representing a triangular distribution. The peak is labeled 'most likely'. The base is labeled 'min' on the left and 'max' on the right. The vertical axis is labeled 'Relative Probability'.</p>

**Table A5.2 Project Details**

Input	Unit
State Route	
Project Name	
Region	
County	
Analyzed By	
Begin MP	
End MP	
Lane Width	feet
Shoulder Width (left/right and inbound/outbound)	feet

**Table A5.3 Analysis Options**

Input	Unit	Probability Distribution	Value
Analysis Period	year	N/A	50
Discount Rate	%	Triangular	3, 4, 5
Beginning of Analysis Period		N/A	Year of Initial Construction
Include Agency Cost Residual Value		N/A	Yes
Include User Costs in Analysis		N/A	Yes
User Cost Comparison Method		N/A	Calculated
Traffic Direction		N/A	Both, Inbound or outbound
Include User Cost Residual Value		N/A	Yes

**Table A5.4 Traffic Data**

Input	Unit	Probability Distribution	Value
AADT (Both Directions) – Construction Year		N/A	Note 1
Single Unit Trucks as Percentage of AADT	%	N/A	Note 1
Combo Unit Trucks as Percentage of AADT	%	N/A	Note 1
Annual Growth Rate of Traffic	%	Normal	Note 1, 1.0
Speed Limit Under Normal Conditions	mph	N/A	Note 1
Lanes Open in Each Direction Under Normal Operation		N/A	Note 1
Free Flow Capacity	vphpl	Deterministic	Software provides calculator
Queue Dissipation Capacity	vphpl	Normal	1818, 144 (Note 2)
Maximum AADT Both Directions		N/A	Note 3
Maximum Queue Length	mile	N/A	Note 4
Rural/Urban		N/A	Note 1

Note 1 – Growth rate can be obtained from the WSPMS or through Regional information.

Note 2– observed flow rates (FHWA)

Note 3 – information contained in the Highway Capacity Manual

Note 4 – based on local experience

**Table A5.5 Value of User Time**

Input	Unit	Probability Distribution	Value
Value of Time for Passenger Cars	\$	Triangular	12.00, 13.96, 16.00
Value of Time for Single Unit Trucks	\$	Triangular	20.00, 22.34, 24.00
Value of Time for Combination Trucks	\$	Triangular	25.00, 26.89, 29.00

**Table A5.6 Traffic Hourly Distribution**

Use default values contained in software program unless Region (or project) specific information is available.

**Table A5.7 Added Vehicle Time and Cost**

Use default values contained in the software program, unless Region (or project) specific information is available.

**Table A5.8 Alternatives (initial and future rehabilitation)**

Input	Unit	Probability Distribution	Value
Alternative Description		N/A	
Activity Description		N/A	
Agency Construction Cost	\$1000	Normal	Cost, 10%
Activity Service Life	year	Triangular	Note 1
Maintenance Frequency	year	Triangular	Note 2
Maintenance Cost	\$1000	Normal	Cost, 10%
Work Zone Length	mile	N/A	Value
Work Zone Capacity	vphpl	Deterministic	See Table A5.9
Work Zone Duration	days	Deterministic	Value
Work Zone Speed Limit	mph	N/A	Value
Number of Lanes Open in Each Direction During Work Zone		N/A	Value
Work Zone Hours		N/A	Value

Note 1: the minimum, most likely, and maximum expected life should be based on regional experience, data contained in the Washington State, and approved by the State Materials Laboratory Pavements Division

Note 2: the minimum, most likely, and maximum expected life (if available) should be based on regional experience and approved by the State Materials Laboratory Pavement Division

**Table A5.9 Measured Average Work Zone Capacities (FHWA).**

Directional Lanes		Average Capacity	
Normal Operations	Work Zone Operations	Vehicles per Hour	Vehicles per Lane per Hour
3	1	1,170	1,170
2	1	1,340	1,340
5	2	2,740	1,370
4	2	2,960	1,480
3	2	2,980	1,490
4	3	4,560	1,520

## APPENDIX 5 – PROBABILISTIC ANALYSIS EXAMPLE

This example is hypothetical. This project involves the removal and replacement of an existing interstate concrete pavement. Roadway configuration is 4 lanes in each direction with 10-foot right shoulders and 4-foot left shoulders. The alternatives evaluated will include:

1. Removal of the existing PCC and replacement with HMA
  - a. Initial construction
    - 1.0 ft HMA
    - 0.55 ft CSBC
    - 1.55 ft total depth
  - b. Initial construction thickness design based on 50-year performance with future overlays, 10 year cycle with minimum life of 6 years and maximum of 12 years
  - c. Future Overlays
    - i. 0.15 foot overlay in 1<sup>st</sup>, 3<sup>rd</sup>, and 5<sup>th</sup> cycles
    - ii. 45 mm Mill and Fill in 2<sup>nd</sup>, 3<sup>rd</sup>, and 5<sup>th</sup> cycles
2. Removal of the existing PCC and replacement with PCC
  - a. Initial construction
    - 1.0 ft HMA
    - 0.55 ft CSBC
    - 1.55 ft total depth
  - b. Initial construction thickness design based on 50-year performance with future rehabilitation in 25<sup>th</sup> year
  - c. Future Rehabilitation
    - i. Diamond grinding to remove studded tire wear and reseal joints every 25 years (minimum of 20 years and maximum of 30 years)
    - ii. 0.15 ft Mill and Fill in 2<sup>nd</sup>, 3<sup>rd</sup>, and 5<sup>th</sup> cycles (pavement life – minimum of 6 years, most likely 10 years, and maximum 12 years)

**LCCA Input Data**

<b>1. Economic Variables</b>	
Value of Time for Passenger Cars (\$)	\$11.50
	<b>LCCATRIANG(10,11.5,13)</b>
Value of Time for Single Unit Trucks (\$)	\$18.50
	<b>LCCATRIANG(17,18.5,20)</b>
Value of Time for Combination Trucks (\$)	\$22.50
	<b>LCCATRIANG(21,22.5,24)</b>

<b>2. Analysis Options</b>	
Include User Costs in Analysis	Yes
Include User Cost Residual Value	Yes
Use Differential User Costs	Yes
User Cost Computation Method	Calculated
Include Agency Cost Residual Value	Yes
Traffic Direction	Inbound
Analysis Period (Years)	60
Beginning of Analysis Period	2003
Discount Rate (%)	4.0
	<b>LCCATRIANG(3,4,5)</b>

<b>3. Project Details and Quantity Calculations</b>	
State Route	LCCA Example
Project Name	
Region	
County	
Analyzed By	L. M. Pierce
Beginning MP	0.00
Ending MP	5.00
Length of Project (miles)	5.00
Lane Width (ft)	12.00
	Right
Shoulder Width - Inbound (ft)	10.00
Shoulder Width - Outbound (ft)	10.00
Roadway Area (Square Feet)	1,584,000
Shoulder Area (Square Feet)	369,600
Total Area (Square Feet)	1,953,600

<b>4. Traffic Data</b>	
AADT (Both Directions) - Construction Year	200,000
Cars as Percentage of AADT (%)	90.0
Single Unit Trucks as Percentage of AADT (%)	3.0
Combination Trucks as Percentage of AADT (%)	7.0
Annual Growth Rate of Traffic (%)	2.5
	<b>LCCANORMAL(2.5,2)</b>
Speed Limit Under Normal Condition (mph)	65
No of Lanes in Each Direction During Normal Operation	5
Free Flow Capacity (vphpl)	2074
Rural/Urban	Urban
Queue Dissipation Capacity (vphpl)	1818
	<b>LCCANORMAL(1818,144)</b>
Maximum AADT (Both Directions)	400,000
Maximum Queue Length (miles)	10.0

**Alternative 1**

<b>Initial Construction</b>	Remove and Replace Existing PCCP with HMA	
Agency Construction Cost (\$1000)	\$12,686.00	
	<b>LCCANORMAL(12686,1268.6)</b>	
User Work Zone Costs (\$1000)	\$200.00	
Work Zone Duration (days)	165	
No of Lanes Open in Each Direction During Work Zone	3	
Activity Service Life (years)	9.3	
	<b>LCCATRIANG(6,10,12)</b>	
Maintenance Frequency (years)	0	
Agency Maintenance Cost (\$1000)	0	
Work Zone Length (miles)	5.00	
Work Zone Speed Limit (mph)	35	
Work Zone Capacity (vphpl)	1500	
Time of Day of Lane Closures (use whole numbers based on a 24-hour clock)		
Inbound	Start	End
First period of lane closure	0	24
Second period of lane closure	0	0
Third period of lane closure	0	0
Outbound	Start	End
First period of lane closure	0	0
Second period of lane closure	0	0
Third period of lane closure	0	0

<b>Rehabilitation #1</b>	Mill and Fill with 2 inch HMA	
Agency Construction Cost (\$1000)	\$2,777.00	
	<b>LCCANORMAL(2777,277.7)</b>	
User Work Zone Costs (\$1000)	\$20.00	
Work Zone Duration (days)	25	
No of Lanes Open in Each Direction During Work Zone	4	
Activity Service Life (years)	9.3	
	<b>LCCATRIANG(6,10,12)</b>	
Maintenance Frequency (years)	0	
Agency Maintenance Cost (\$1000)	0	
Work Zone Length (miles)	1.00	
Work Zone Speed Limit (mph)	35	
Work Zone Capacity (vphpl)	1500	
Time of Day of Lane Closures (use whole numbers based on a 24-hour clock)		
Inbound	Start	End
First period of lane closure	0	5
Second period of lane closure	21	24
Third period of lane closure	0	0
Outbound	Start	End
First period of lane closure	0	0
Second period of lane closure	0	0
Third period of lane closure	0	0

WSDOT Pavement Policy

<b>Rehabilitation #2</b>	2 inch HMA Overlay	
Agency Construction Cost (\$1000)	\$3,409.00	
	<b>LCCANORMAL(3409,340.9)</b>	
User Work Zone Costs (\$1000)	\$30.00	
Work Zone Duration (days)	35	
No of Lanes Open in Each Direction During Work Zone	4	
Activity Service Life (years)	9.3	
	<b>LCCATRIANG(6,10,12)</b>	
Maintenance Frequency (years)	0	
Agency Maintenance Cost (\$1000)	0	
Work Zone Length (miles)	1.00	
Work Zone Speed Limit (mph)	35	
Work Zone Capacity (vphpl)	1500	
Time of Day of Lane Closures (use whole numbers based on a 24-hour clock)		
Inbound	Start	End
First period of lane closure	0	5
Second period of lane closure	21	24
Third period of lane closure	0	0
Outbound	Start	End
First period of lane closure	0	0
Second period of lane closure	0	0
Third period of lane closure	0	0

<b>Rehabilitation #3</b>	Mill and Fill with 2 inch HMA	
Agency Construction Cost (\$1000)	\$2,777.00	
	<b>LCCANORMAL(2777,277.7)</b>	
User Work Zone Costs (\$1000)	\$20.00	
Work Zone Duration (days)	25	
No of Lanes Open in Each Direction During Work Zone	4	
Activity Service Life (years)	9.3	
	<b>LCCATRIANG(6,10,12)</b>	
Maintenance Frequency (years)	0	
Agency Maintenance Cost (\$1000)	0	
Work Zone Length (miles)	1.00	
Work Zone Speed Limit (mph)	35	
Work Zone Capacity (vphpl)	1500	
Time of Day of Lane Closures (use whole numbers based on a 24-hour clock)		
Inbound	Start	End
First period of lane closure	0	5
Second period of lane closure	21	24
Third period of lane closure	0	0
Outbound	Start	End
First period of lane closure	0	0
Second period of lane closure	0	0
Third period of lane closure	0	0

WSDOT Pavement Policy

<b>Rehabilitation #4</b>	2 inch HMA Overlay	
Agency Construction Cost (\$1000)	\$3,409.00	
	<b>LCCANORMAL(3409,340.9)</b>	
User Work Zone Costs (\$1000)	\$30.00	
Work Zone Duration (days)	35	
No of Lanes Open in Each Direction During Work Zone	4	
Activity Service Life (years)	9.3	
	<b>LCCATRIANG(6,10,12)</b>	
Maintenance Frequency (years)	0	
Agency Maintenance Cost (\$1000)	0	
Work Zone Length (miles)	1.00	
Work Zone Speed Limit (mph)	35	
Work Zone Capacity (vphpl)	1500	
Time of Day of Lane Closures (use whole numbers based on a 24-hour clock)		
Inbound	Start	End
First period of lane closure	0	5
Second period of lane closure	21	24
Third period of lane closure	0	0
Outbound	Start	End
First period of lane closure	0	0
Second period of lane closure	0	0
Third period of lane closure	0	0

<b>Rehabilitation #5</b>	Mill and Fill with 2 inch HMA	
Agency Construction Cost (\$1000)	\$2,777.00	
	<b>LCCANORMAL(2777,277.7)</b>	
User Work Zone Costs (\$1000)	\$20.00	
Work Zone Duration (days)	25	
No of Lanes Open in Each Direction During Work Zone	4	
Activity Service Life (years)	9.3	
	<b>LCCATRIANG(6,10,12)</b>	
Maintenance Frequency (years)	0	
Agency Maintenance Cost (\$1000)	0	
Work Zone Length (miles)	1.00	
Work Zone Speed Limit (mph)	35	
Work Zone Capacity (vphpl)	1500	
Time of Day of Lane Closures (use whole numbers based on a 24-hour clock)		
Inbound	Start	End
First period of lane closure	0	5
Second period of lane closure	21	24
Third period of lane closure	0	0
Outbound	Start	End
First period of lane closure	0	0
Second period of lane closure	0	0
Third period of lane closure	0	0

WSDOT Pavement Policy

<b>Rehabilitation #6</b>	2 inch HMA Overlay	
Agency Construction Cost (\$1000)	\$3,409.00	
	<b>LCCANORMAL(3409,340.9)</b>	
User Work Zone Costs (\$1000)	\$30.00	
Work Zone Duration (days)	35	
No of Lanes Open in Each Direction During Work Zone	4	
Activity Service Life (years)	9.3	
	<b>LCCATRIANG(6,10,12)</b>	
Maintenance Frequency (years)	0	
Agency Maintenance Cost (\$1000)	0	
Work Zone Length (miles)	1.00	
Work Zone Speed Limit (mph)	35	
Work Zone Capacity (vphpl)	1500	
Time of Day of Lane Closures (use whole numbers based on a 24-hour clock)		
Inbound	Start	End
First period of lane closure	0	5
Second period of lane closure	21	24
Third period of lane closure	0	0
Outbound	Start	End
First period of lane closure	0	0
Second period of lane closure	0	0
Third period of lane closure	0	0

**Alternative 2**

<b>Initial Construction</b>	Remove and Replace Existing PCC with PCC	
Agency Construction Cost (\$1000)	\$18,249.00	
User Work Zone Costs (\$1000)	\$300.00	
Work Zone Duration (days)	165	
No of Lanes Open in Each Direction During Work Zone	3	
Activity Service Life (years)	35.0	
	<b>LCCATRIANG(25,35,45)</b>	
Maintenance Frequency (years)	0	
Agency Maintenance Cost (\$1000)	0	
Work Zone Length (miles)	5.00	
Work Zone Speed Limit (mph)	35	
Work Zone Capacity (vphpl)	1500	
Time of Day of Lane Closures (use whole numbers based on a 24-hour clock)		
Inbound	Start	End
First period of lane closure	0	24
Second period of lane closure	0	0
Third period of lane closure	0	0
Outbound	Start	End
First period of lane closure	0	0
Second period of lane closure	0	0
Third period of lane closure	0	0

<b>Rehabilitation #1</b>	Diamond Grinding and Joint Resealing	
Agency Construction Cost (\$1000)	\$2,441.00	
	<b>LCCANORMAL(2441,244.1)</b>	
User Work Zone Costs (\$1000)	\$50.00	
Work Zone Duration (days)	50	
No of Lanes Open in Each Direction During Work Zone	4	
Activity Service Life (years)	15.0	
	<b>LCCATRIANG(10,15,20)</b>	
Maintenance Frequency (years)	0	
Agency Maintenance Cost (\$1000)	0	
Work Zone Length (miles)	1.00	
Work Zone Speed Limit (mph)	35	
Work Zone Capacity (vphpl)	1500	
Time of Day of Lane Closures (use whole numbers based on a 24-hour clock)		
Inbound	Start	End
First period of lane closure	0	5
Second period of lane closure	21	24
Third period of lane closure	0	0
Outbound	Start	End
First period of lane closure	0	0
Second period of lane closure	0	0
Third period of lane closure	0	0

WSDOT Pavement Policy

<b>Rehabilitation #2</b>	Diamond Grinding and Joint Resealing	
Agency Construction Cost (\$1000)	\$2,441.00	
	<b>LCCANORMAL(2441,244.1)</b>	
User Work Zone Costs (\$1000)	\$50.00	
Work Zone Duration (days)	50	
No of Lanes Open in Each Direction During Work Zone	4	
Activity Service Life (years)	15.0	
	<b>LCCATRIANG(10,15,20)</b>	
Maintenance Frequency (years)	0	
Agency Maintenance Cost (\$1000)	0	
Work Zone Length (miles)	1.00	
Work Zone Speed Limit (mph)	35	
Work Zone Capacity (vphpl)	1500	
Time of Day of Lane Closures (use whole numbers based on a 24-hour clock)		
Inbound	Start	End
First period of lane closure	0	5
Second period of lane closure	21	24
Third period of lane closure	0	0
Outbound	Start	End
First period of lane closure	0	0
Second period of lane closure	0	0
Third period of lane closure	0	0

<b>Rehabilitation #3</b>		
Agency Construction Cost (\$1000)		
User Work Zone Costs (\$1000)	\$50.00	
Work Zone Duration (days)		
No of Lanes Open in Each Direction During Work Zone	4	
Activity Service Life (years)	15.0	
Maintenance Frequency (years)	0	
Agency Maintenance Cost (\$1000)	0	
Work Zone Length (miles)	1.00	
Work Zone Speed Limit (mph)	35	
Work Zone Capacity (vphpl)	1500	
Time of Day of Lane Closures (use whole numbers based on a 24-hour clock)		
Inbound	Start	End
First period of lane closure		
Second period of lane closure		
Third period of lane closure		
Outbound	Start	End
First period of lane closure		
Second period of lane closure		
Third period of lane closure		

WSDOT Pavement Policy

<b>Rehabilitation #4</b>		
Agency Construction Cost (\$1000)		
User Work Zone Costs (\$1000)	\$50.00	
Work Zone Duration (days)		
No of Lanes Open in Each Direction During Work Zone	4	
Activity Service Life (years)	15.0	
	<b>LCCATRIANG(10,15,20)</b>	
Maintenance Frequency (years)		
Agency Maintenance Cost (\$1000)		
Work Zone Length (miles)	1.00	
Work Zone Speed Limit (mph)	35	
Work Zone Capacity (vphpl)	1500	
Time of Day of Lane Closures (use whole numbers based on a 24-hour clock)		
Inbound	Start	End
First period of lane closure		
Second period of lane closure		
Third period of lane closure		
Outbound	Start	End
First period of lane closure		
Second period of lane closure		
Third period of lane closure		



<b>Rehabilitation #5</b>		
Agency Construction Cost (\$1000)		
User Work Zone Costs (\$1000)	\$50.00	
Work Zone Duration (days)		
No of Lanes Open in Each Direction During Work Zone	4	
Activity Service Life (years)	15.0	
	<b>LCCATRIANG(10,15,20)</b>	
Maintenance Frequency (years)		
Agency Maintenance Cost (\$1000)		
Work Zone Length (miles)	1.00	
Work Zone Speed Limit (mph)	35	
Work Zone Capacity (vphpl)	1500	
Time of Day of Lane Closures (use whole numbers based on a 24-hour clock)		
Inbound	Start	End
First period of lane closure		
Second period of lane closure		
Third period of lane closure		
Outbound	Start	End
First period of lane closure		
Second period of lane closure		
Third period of lane closure		

WSDOT Pavement Policy

<b>Rehabilitation #6</b>		
Agency Construction Cost (\$1000)		
User Work Zone Costs (\$1000)	\$50.00	
Work Zone Duration (days)		
No of Lanes Open in Each Direction During Work Zone	4	
Activity Service Life (years)	15.0	
	<b>LCCATRIANG(10,15,20)</b>	
Maintenance Frequency (years)		
Agency Maintenance Cost (\$1000)		
Work Zone Length (miles)	1.00	
Work Zone Speed Limit (mph)	35	
Work Zone Capacity (vphpl)	1500	
Time of Day of Lane Closures (use whole numbers based on a 24-hour clock)		
Inbound	Start	End
First period of lane closure		
Second period of lane closure		
Third period of lane closure		
Outbound	Start	End
First period of lane closure		
Second period of lane closure		
Third period of lane closure		

**Deterministic Results**

Total Cost	Alternative 1: HMA		Alternative 2: PCC	
	Agency Cost (\$1000)	User Cost (\$1000)	Agency Cost (\$1000)	User Cost (\$1000)
Nominal \$	\$30,107.67	\$270,356.78	\$22,317.33	\$261,385.30
Present Value	\$18,891.08	\$240,884.78	\$19,133.72	\$238,485.30
EUAC	\$835.02	\$10,647.55	\$845.75	\$10,541.49
Lowest Present Value Agency Cost			Alternative 1: HMA	
Lowest Present Value User Cost			Alternative 2: PCC	

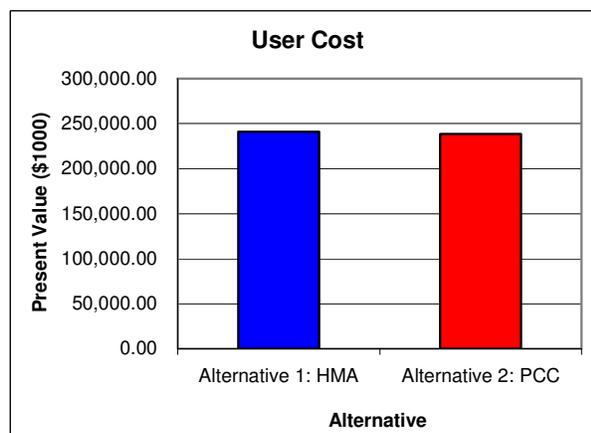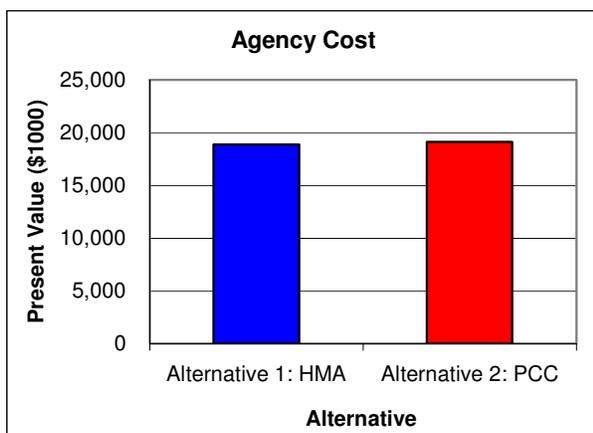



## WSDOT Pavement Policy

Based on the deterministic analysis, the PCC alternative is slightly higher for the present value of agency costs (approximately 1.3 percent higher) than the HMA alternative. For the present value of user costs, the PCC alternative is slightly lower (approximately 1.00 percent lower) than the HMA alternative. Based on total present value costs, these two alternatives would be considered equivalent (PCC is approximately 0.8 percent lower than HMA).

## Probabilistic Results

Total Cost (Present Value)	Alternative 1: HMA		Alternative 2: PCC	
	Agency Cost (\$1000)	User Cost (\$1000)	Agency Cost (\$1000)	User Cost (\$1000)
Mean	\$18,365.23	\$239,105.37	\$19,153.28	\$236,004.03
Standard Deviation	\$1,511.70	\$11,478.88	\$271.21	\$10,363.83
Minimum	\$13,083.68	\$209,885.91	\$18,553.22	\$209,779.17
Maximum	\$24,641.06	\$275,664.34	\$20,249.69	\$265,385.41

Total Cost (Present Value)	Alternative 1: HMA		Alternative 2: PCC	
	Agency Cost (\$1000)	User Cost (\$1000)	Agency Cost (\$1000)	User Cost (\$1000)
Mean	\$18,365.23	\$239,105.37	\$19,153.28	\$236,004.03
Standard Deviation	\$1,511.70	\$11,478.88	\$271.21	\$10,363.83
Minimum	\$13,083.68	\$209,885.91	\$18,553.22	\$209,779.17
Maximum	\$24,641.06	\$275,664.34	\$20,249.69	\$265,385.41

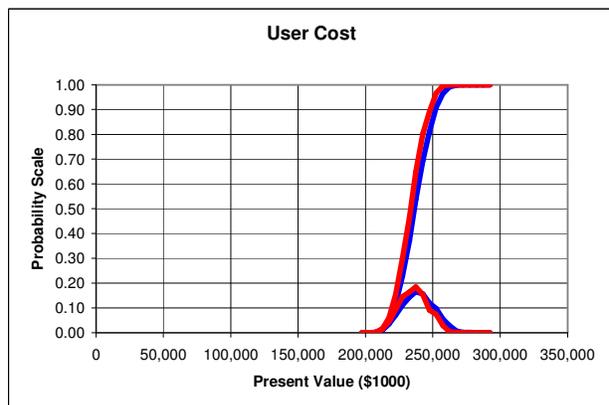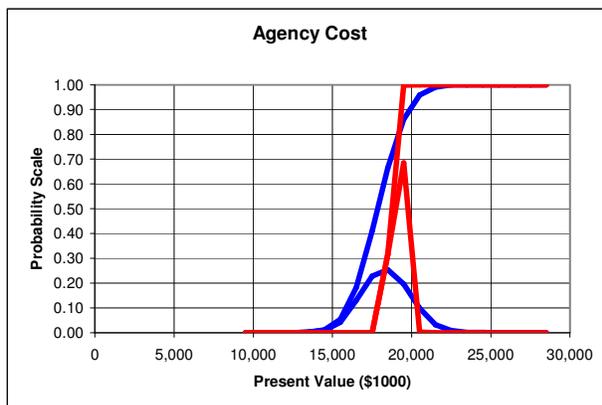

Based on the cumulative probability distributions shown above, there is an 80 percent probability that the agency costs for the HMA alternative will be less than the PCC alternative as demonstrated by the narrowness of the spread in the probabilistic analysis. The above graph also shows that there is a lower risk of cost variation with the PCC alternative. The slopes of the cumulative risk profiles shown above are similar for the user costs and only a slight difference for the agency costs. The alternative with the steeper slope would have less variability and the means being similar, would also be the preferred alternative. Therefore, in this analysis the preferred option would be the PCC alternative.

## APPENDIX 6 – PROJECT SPECIFIC DETAILS ITEMS FOR CONSIDERATION

- Air pollution impacts. Consider if either effects on traffic or effects during production affect the project or future preservation efforts
- Non-user impacts. How are surrounding neighborhoods affected by the project? How do these impacts vary depending on the type of pavement selected? What are the impacts at the point of production?
- Haul routes through neighborhoods. Consider the impacts both during initial construction and future preservation projects.
- Future ability of plants to operate at night in urban areas and associated cost increases. Where are typical production plants located? Will night work continue to be feasible in the area of plant production or will urban growth affect this? What possible effect will urban growth have on making production plants move further away from the corridor?
- Neighborhood impacts due to trip diversion during preservation projects. When a highway closure impacts the traveling public, many will divert to other routes to avoid delays. These diversions have associated costs, in and of themselves. Some of the costs come from backups and delays (user impacts) on these diversion routes; some of the costs come from impacts to neighborhoods, through increased traffic, noise, congestion, air pollution, safety and accident risks. Consider the level of user delays and the likelihood that diversions will occur and the level of impact these diversions could have on non-highway users.
- Business impacts due to reduced or restricted access. This impact happens both due to direct impacts to users and to impacts due to diversion. The magnitude grows as an area urbanizes and increases the number of businesses that stay open for extended (mostly nighttime) hours of operation. Diversion through a neighborhood with extensive commercial business can greatly impact those businesses.
- Effect of nighttime noise variances and risk of approval of noise variances. These two items tie in with the item noted above. As urban areas grow, nighttime noise variances become more difficult to obtain and more restrictive in their limitations. Review the corridor in question and the expected growth projections, to develop an idea of the risk associated with this non-user impact. Noise restrictions can limit hours of operations to the point of preventing work, or they can restrict noise levels below that achievable by state of the practice construction equipment. Noise restrictions apply also to vibration and noise generated by vibratory equipment and these restrictions can prevent the use of particular equipment within selected urban corridors. A single resident affected by nighttime noise can and has effectively shut down projects, forcing a move to day work and created huge impacts on highway users through delay and impacts.
- Noise
  - Pavement noise. Pavement surface texture can have an effect on noise through a corridor with some pavement surfaces being measurably quieter than others
  - Noise walls. Evaluate whether the corridor already has noise walls or is expected to have noise walls by the time of the project, and the impacts having or not having the walls might have on non-users/residents, both for construction noise and pavement noise
  - Haul through neighborhoods, at night. Haul through neighborhoods at night (and if you are hauling, you are traveling through *someone's* neighborhood) should be considered as an impact.

## WSDOT Pavement Policy

- Sparsely populated areas will obviously have a smaller impact due to the noise of hauling vehicles than will densely packed urban areas.
- Noise from diverted traffic and other impacts. Diverted traffic must drive through someone's neighborhood to get to where they are going. At night, diverted traffic, especially involving large trucks, can have a significant noise impact on neighborhoods.
  - Noise generation during preservation projects. When preservation projects are performed on any pavement, noise is generated and its impacts on the local community must also be considered, in addition to the impact of the noise from the initial construction.
- Safety.
    - Public exposure to traffic control during lane closures.
    - Work exposure to traffic during lane closures.
    - Lane closures are a safety risk factor for both workers and the traveling public. Limited vision, nighttime lighting, temporary traffic control and other factors increase the risk of accidents to both motorists and to workers within the work zone. Evaluate the risk to both, given the nature of the corridor, the ADT, the degree of urbanization and the complexity of the facility.
    - Safety risks associated with maintenance by state forces between preservation projects.
  - Pavement type continuity within a corridor (similar to architectural choices for structures and wall-types within a corridor and landscape architectural choices for continuity within a corridor). It is generally not desirable to switch pavement types over relatively short stretches of highway. Maintenance needs change for each given pavement type, as do preservation needs. Further, the change in pavement type impacts the public in various ways, including aesthetics.
  - Environmental effects.
    - Runoff temperature due to heating effects depending on pavement type. Evaluate in conjunction with design of the storm sewer system.

## **APPENDIX 7 – WSDOT PAVEMENT TYPE SELECTION COMMITTEE**

The Pavement-Type Selection Committee (Committee) is composed of:

1. Chief Engineer, Assistant Secretary of Engineering and Regional Operations
2. State Materials Engineer
3. State Design Engineer
4. Director of Project Control and Reporting
5. Region Administrator of the region in which the project under consideration is located



## Memorandum

April 16, 2009

TO: J. C. Lenzi, 47315

FROM: Tom Baker, 47365

SUBJECT: Pavement Type Selection Process

When the pavement type selection has been completed and forwarded to the State Materials Laboratory Pavement Division will formulate the Pavement Type Selection Committee (referred to as the Committee) Approval Letter and request that each member of the Committee sign and forward the letter on to the next member. The Committee is not required to convene if the life cycle cost analysis between the alternatives is greater than 15 percent and the recommendations are acceptable to both the Region and the State Materials Laboratory Pavements Division. The Approval Letter shall provide the necessary documentation that supports the Committee's selection of the pavement type.

Projects to be reviewed shall be distributed to the Committee members for approval (see attached example of Approval Letter). Based on this review and obtaining consensus from the Committee, the Pavement Division will either process the Approval Letter, take appropriate action to obtain consensus, or convene the Committee.

In order to expedite the required time and expended level of effort for the review of pavement type selection projects, the following procedure is recommended:

1. The Committee should convene if the pavement type recommended by the Region is contrary to pavement design and project specific detail recommendations. The pavement design and project specific detail recommendations shall be subject to the review of the Pavement Division or any member of the Committee. Under these circumstances it shall be the responsibility of the Pavements Division or the Committee member to formulate, in writing, why the selected pavement type is not appropriate and distribute his/her rationale to all members. If all members agree with the recommendations a meeting will not be necessary, otherwise, the Committee should convene.
2. The Committee should convene at the request of any member.

TEB: jsu



# Memorandum

## PAVEMENT TYPE SELECTION

SR-3  
Luoto Road to SR-305  
MP 48.90 to MP 53.00

The Pavement Type Selection Committee has completed its review of the pavement type selection for the project SR-3 Luoto Road to SR-305, MP 48.90 to MP 53.00.

The project consists of constructing the final two lanes of the ultimate four-lane facility from Luoto Road to SR-305.

The pavement design analysis resulted in both pavement types (HMA and PCC) being viable. In the life cycle cost analysis, one PCC alternative was compared to one HMA alternative. In the life cycle cost analysis of the two alternatives, there is a cost advantage in the use of HMA over PCC of greater than 15 percent. The Committee approves the use of HMA on this project.

### **The Pavement Type Selection Committee**

\_\_\_\_\_  
Chief Engineer  
Assistant Secretary of Engineering and  
Regional Operations

\_\_\_\_\_  
State Design Engineer

\_\_\_\_\_  
State Materials Engineer

\_\_\_\_\_  
Director of Project Control and Reporting

\_\_\_\_\_  
Olympic Region Administrator

JU:ck