


**GIRDER ELEVATION  
MID-SEGMENT**

\* OMIT HOLES AND PLACE INSERTS ON THE INTERIOR FACE OF EXTERIOR GIRDERS. PLACE HOLES AND INSERTS PARALLEL TO SKEW. INSERTS SHALL BE 1"Ø MEADOWBURKE MX-3 HI-TENSILE, 1"Ø MEADOWBURKE FX-19 FERRULE INSERT, 1"Ø x 5 1/2" WILLIAMS F22 OPEN FERRULE INSERT, 1"Ø x 4 5/8" DAYTON-SUPERIOR F-62 FLARED THIN SLAB FERRULE INSERT OR APPROVED EQUAL. (TYP.)

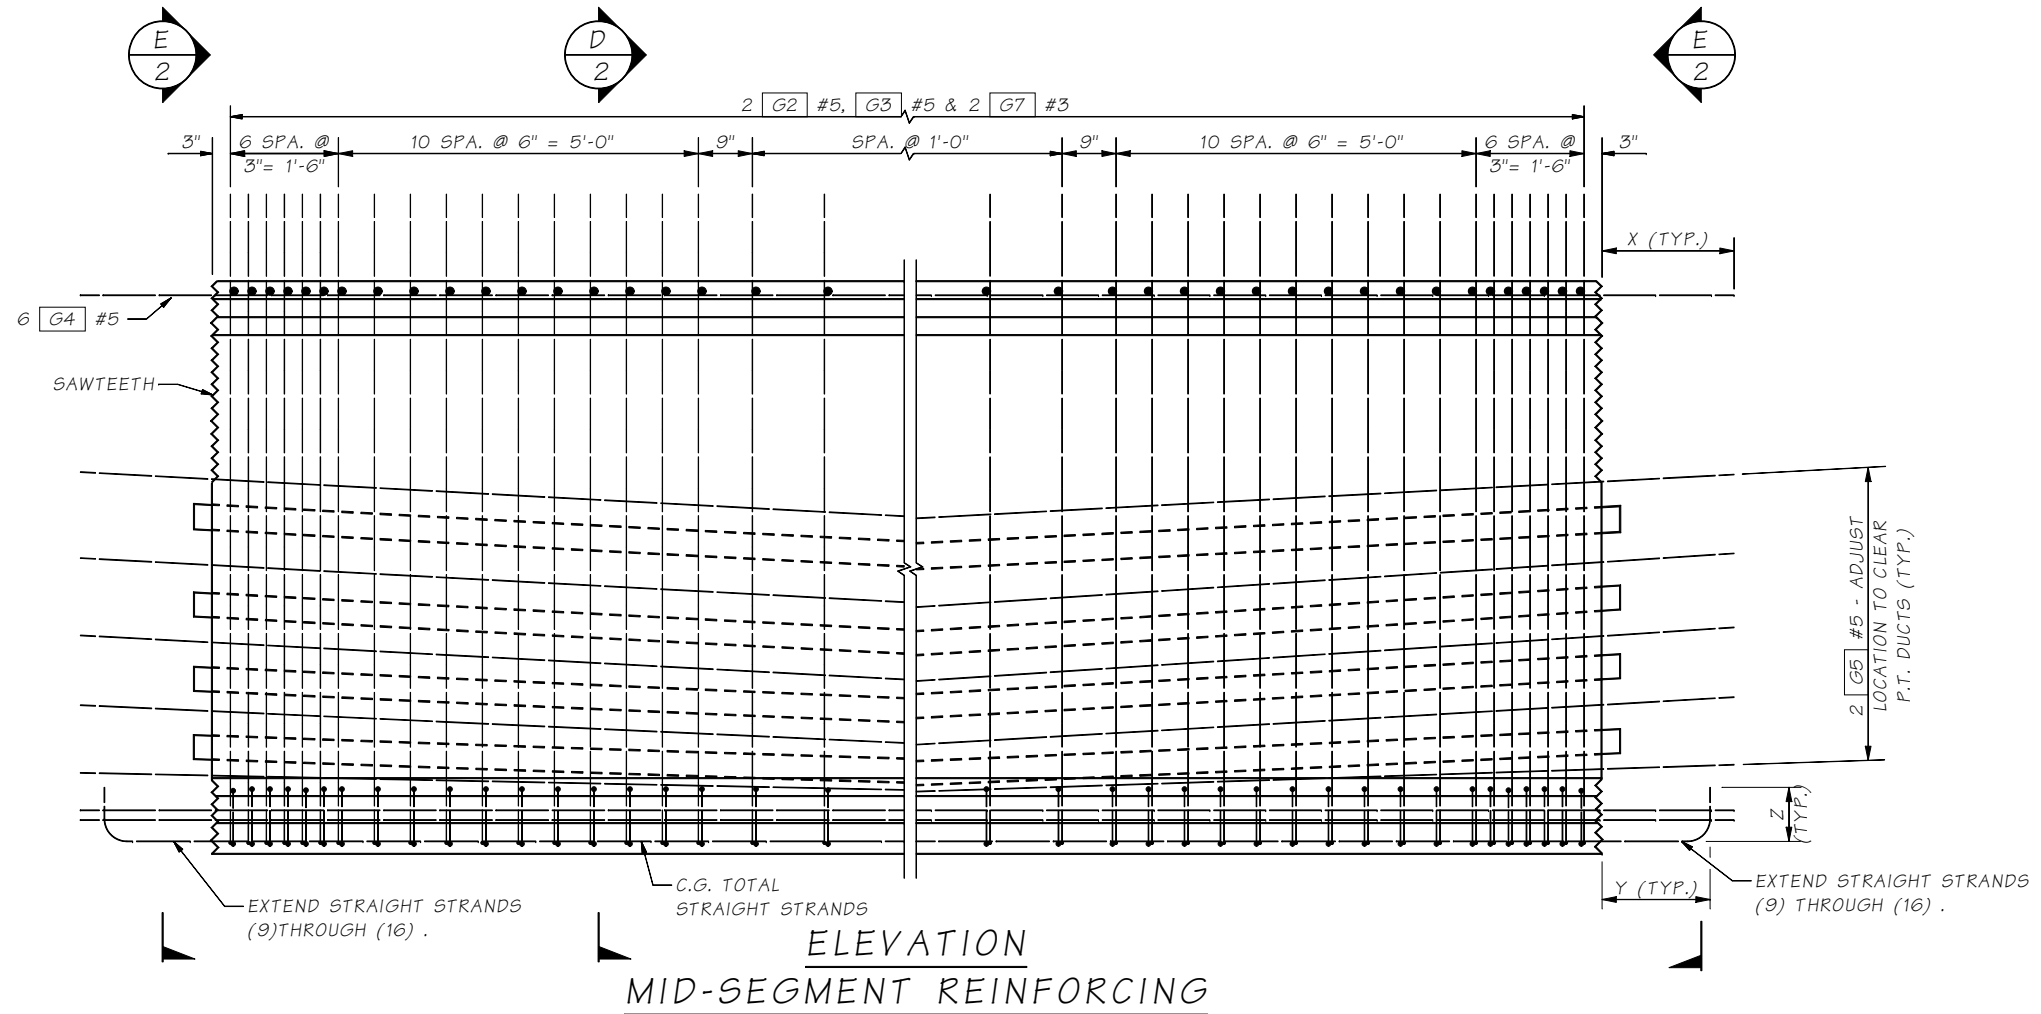

**ELEVATION  
MID-SEGMENT REINFORCING**

Last revised: 5/23/16

JOB NO. 5.9-A3-4  
SHEET

Bridge Design Engr.	M:\STANDARDS\Girders\PT Wide Flange\WF95PTG4.MAN				
Supervisor					
Designed By					
Checked By					
Detailed By					
Bridge Projects Engr.					
Prelim. Plan By					
Architect/Specialist	DATE	REVISION	BY	APPD	

**BRIDGE  
AND  
STRUCTURES  
OFFICE**



**STANDARD  
PRESTRESSED CONCRETE GIRDERS**

WF95PTG SPLICED GIRDER  
DETAILS 4 OF 5

BRIDGE SHEET NO.  
SHEET  
OF  
SHEETS