



DRAWN BY: ADAM COCHRAN

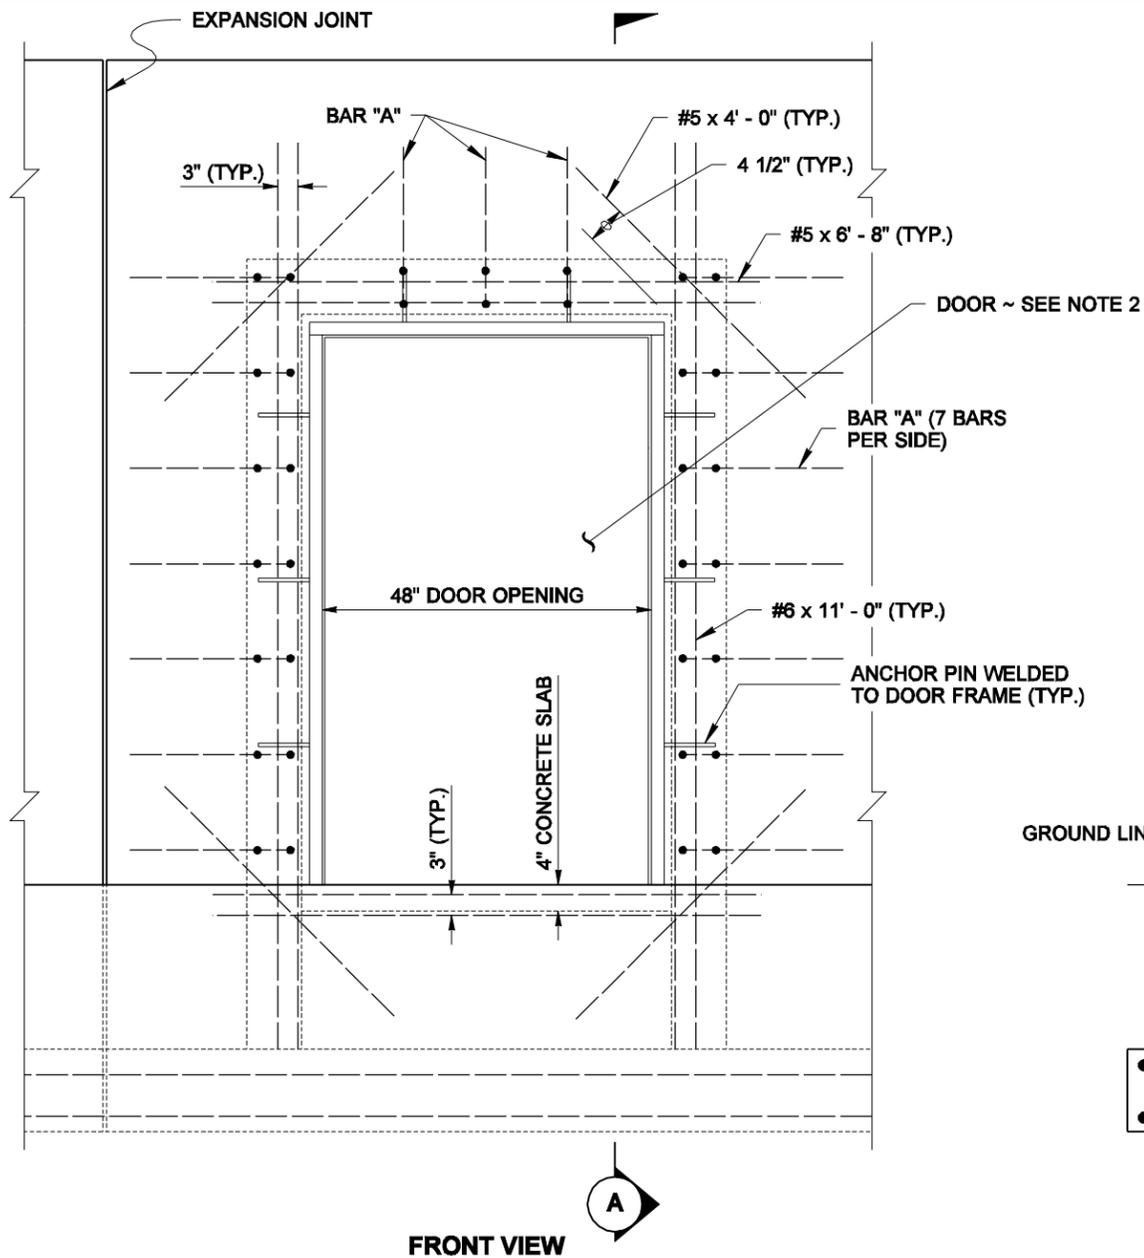


FRONT VIEW

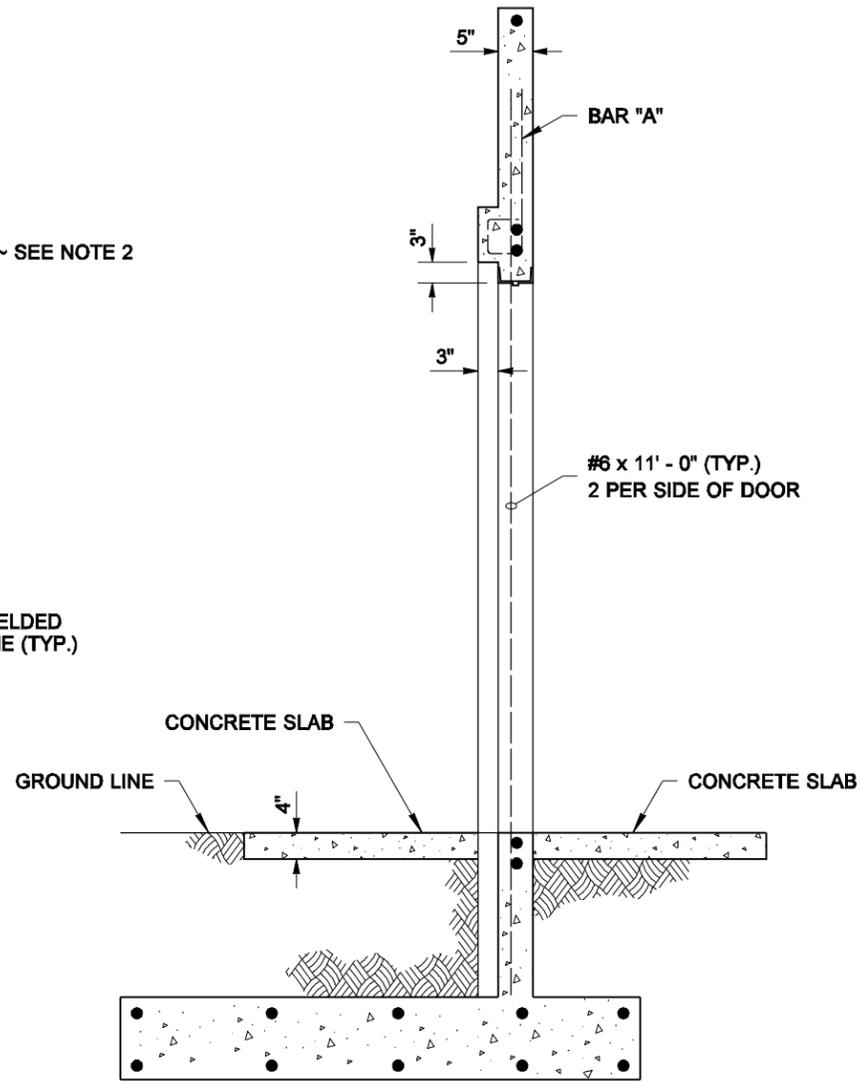


A SECTION

- NOTES**
1. All rebar shall have a minimum 1 1/2" cover.
 2. See Standard Plan D-2.92 for door and frame details.
 3. See Standard Plan D-2.06 for wall reinforcement not shown.

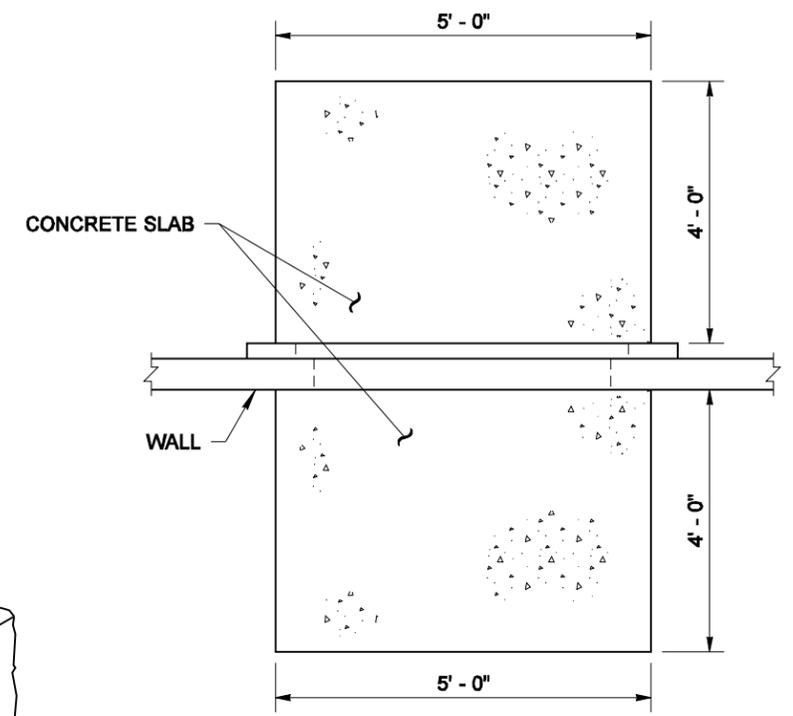


PLAN VIEW
CONCRETE SLAB DETAIL

**FOR CAST-IN-PLACE WALL
ON OFFSET SPREAD FOOTING**

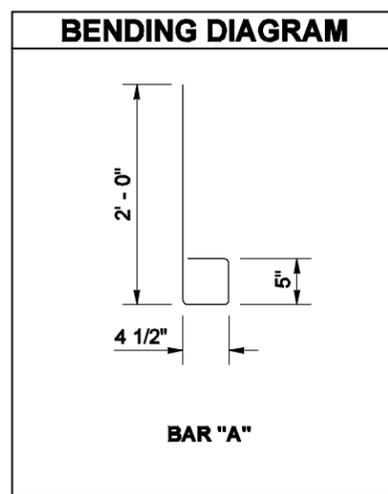

BAR "A"

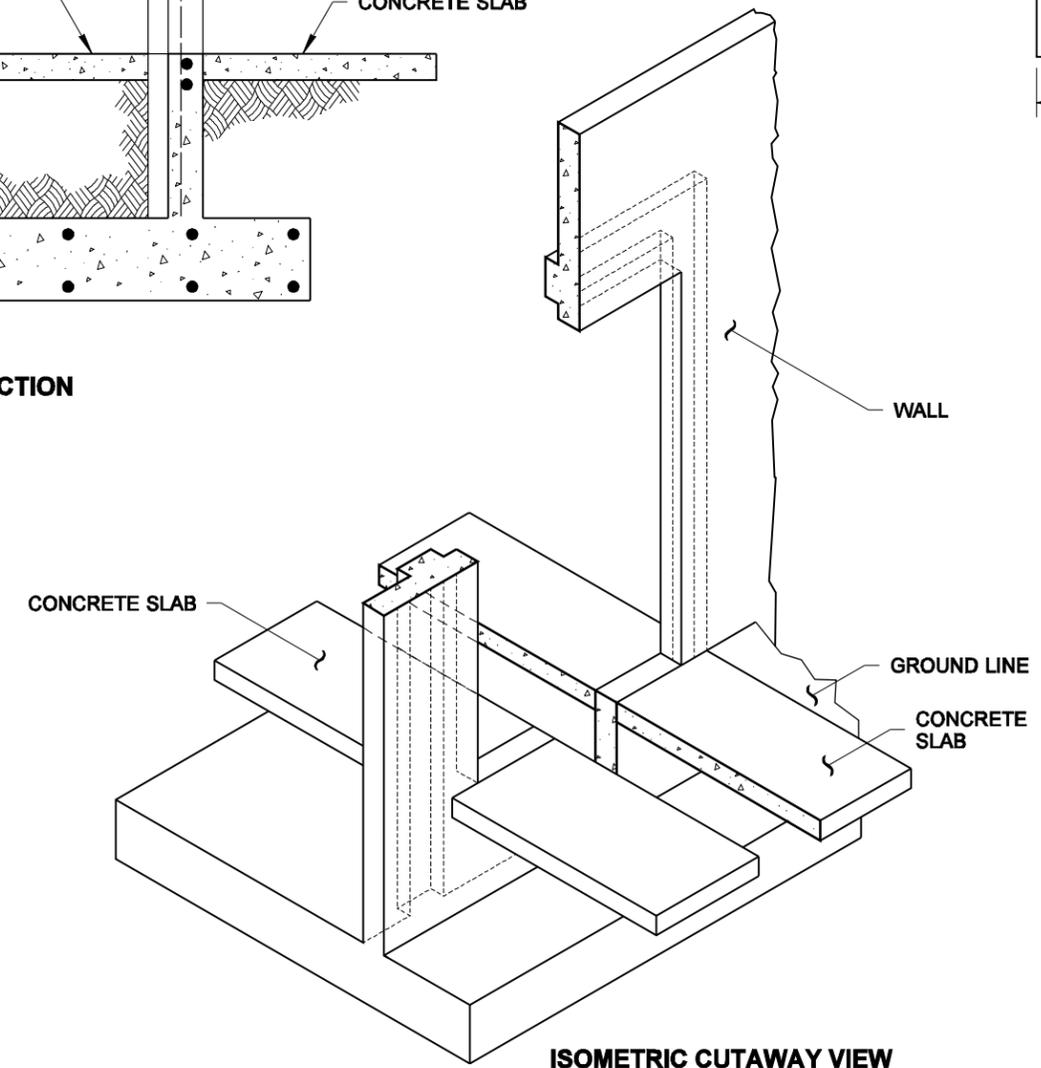

ISOMETRIC CUTAWAY VIEW



NOTE: THIS PLAN IS NOT A LEGAL ENGINEERING DOCUMENT UNLESS IT IS SIGNED BY THE ENGINEER AND APPROVED FOR PUBLICATION IS KEPT ON FILE AT THE WASHINGTON STATE DEPARTMENT OF TRANSPORTATION. A COPY MAY BE OBTAINED UPON REQUEST.

**NOISE BARRIER WALL
ACCESS DOOR TYPE 1
STANDARD PLAN D-2.80-00**

SHEET 1 OF 1 SHEET

APPROVED FOR PUBLICATION

Harold J. Peterfeso 11-10-05
STATE DESIGN ENGINEER DATE

