




LIVE FASCINE BUNDLE ISOMETRIC

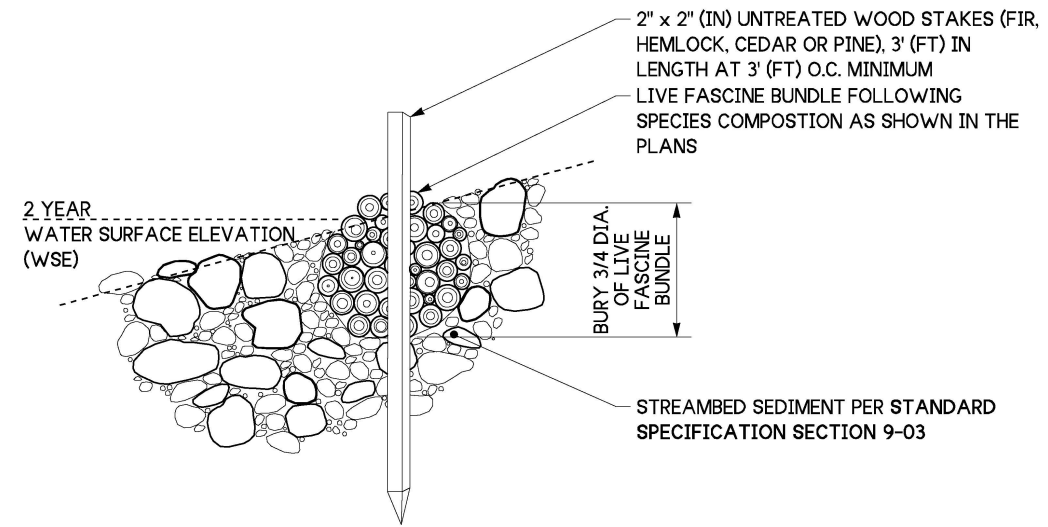

LIVE FASCINE BUNDLE IN STREAMBED SEDIMENT

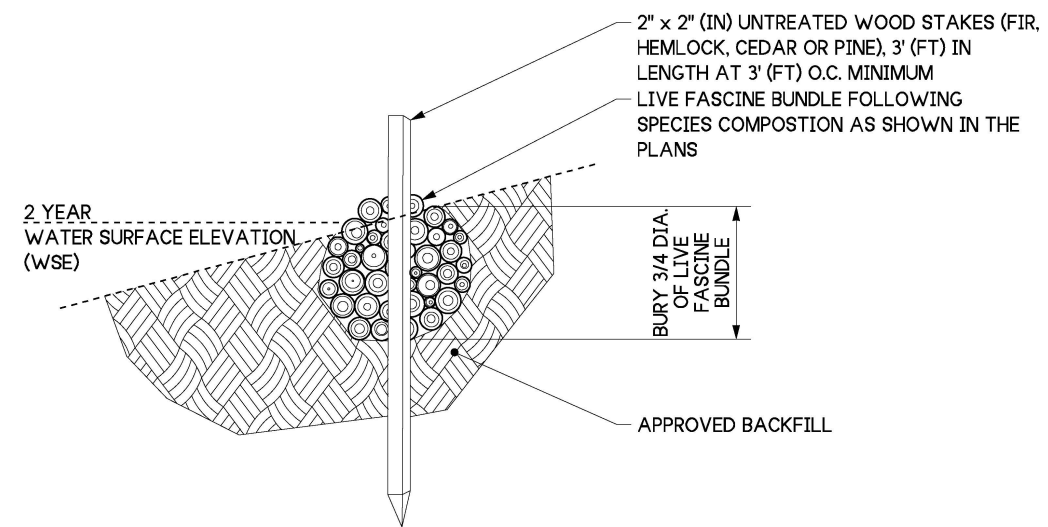


LIVE FASCINE BUNDLE TYPICAL

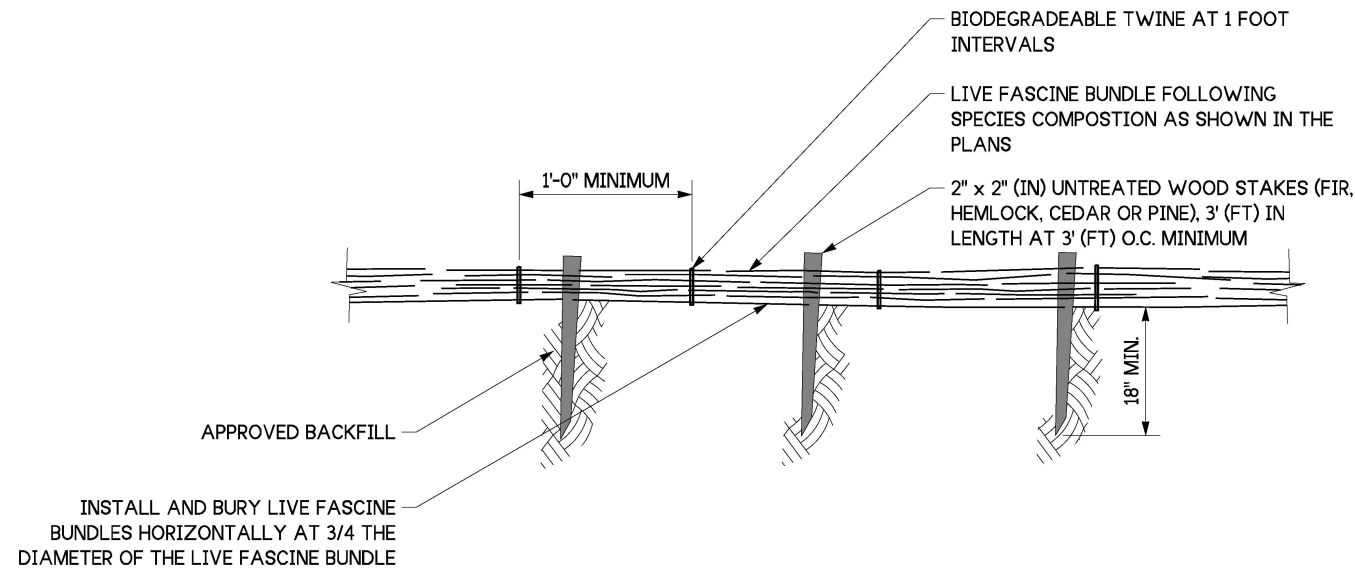

LIVE FASCINE BUNDLE SECTION

NOTES:

1. See plant material list for species.
2. Live fascines shall be constructed of live and dead cuttings at 3/4" (in) diameter bundled together with an overall diameter of 8 to 18 inches. Dead cuttings shall constitute no more than 40 percent of the total fascine bundle.
3. The total length of each live fascine shall be a minimum of 5 feet. Branches shall be bundled into log-like forms and bound with biodegradable coir twine spaced at 1 foot intervals along the entire length of the live fascine.
4. Live fascines shall be installed horizontally in a trench whose depth shall be 3/4 the diameter of the live fascine. Secure the live fascine with wood stakes at 3 intervals.
5. The ends of live fascine bundles shall be woven together so that no gap remains between the two sections of the live fascine.
6. See Standard Specification Section 8-02.3(15(A)), for additional requirements.

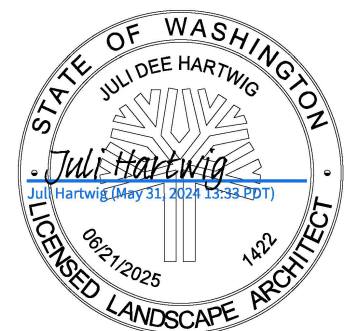

May 31, 2024

LIVE FASCINE BUNDLE INSTALLATION

STANDARD PLAN H-10.16-00

SHEET 1 OF 1 SHEET

APPROVED FOR PUBLICATION

*Mark A. Davis*

Jun 2, 2024

STATE DESIGN ENGINEER

