



**ONE SIGN LIGHTING LUMINAIRE
BRACE PLACEMENT**

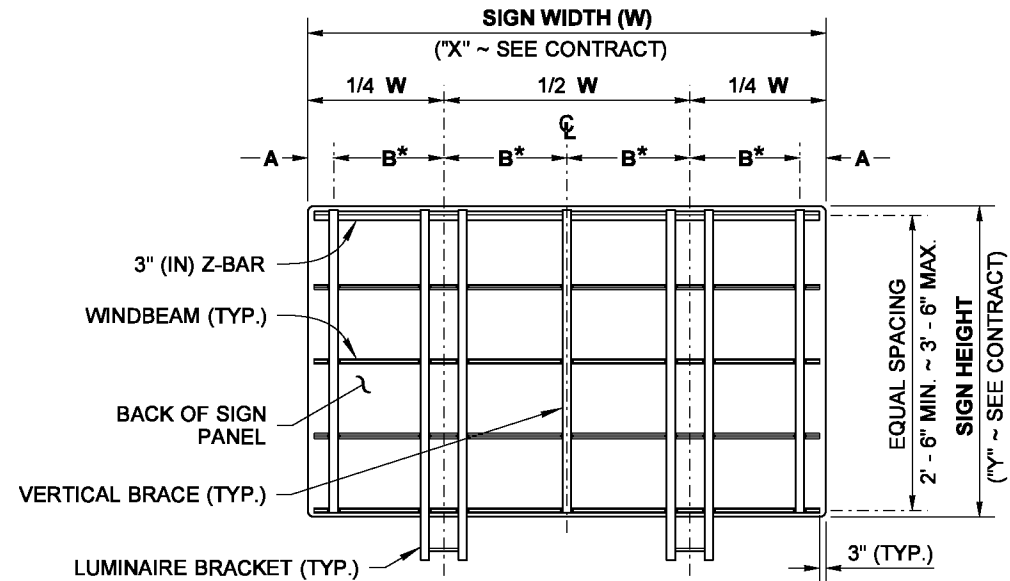


**TWO SIGN LIGHTING LUMINAIRE
BRACE PLACEMENT**

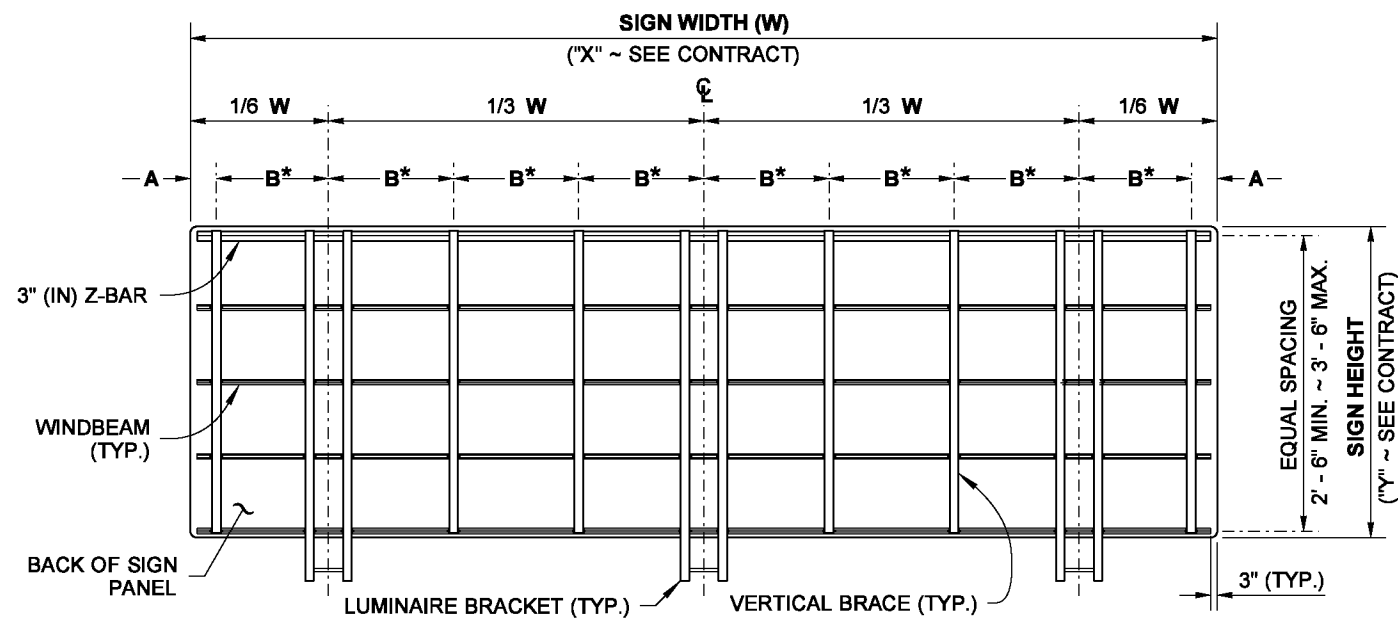

**THREE SIGN LIGHTING LUMINAIRE
BRACE PLACEMENT**

VERTICAL BRACE SPACING WITH SIGN LIGHTING		
SIGN WIDTH	A	B*
ONE SIGN LIGHTING LUMINAIRE		
8' - 0"	6"	3' - 6"
10' - 0"	6"	4' - 6"
12' - 0"	6"	5' - 6"
14' - 0"	1' - 0"	6' - 0"
16' - 0"	2' - 0"	6' - 0"
TWO SIGN LIGHTING LUMINAIRE		
18' - 0"	6"	4' - 3"
20' - 0"	6"	4' - 9"
22' - 0"	6"	5' - 3"
24' - 0"	6"	5' - 9"
26' - 0"	6"	6' - 3"
28' - 0"	6"	6' - 9"
30' - 0"	1' - 0"	7' - 0"
32' - 0"	2' - 0"	7' - 0"
THREE SIGN LIGHTING LUMINAIRE		
34' - 0"	6"	4' - 1 1/2"
36' - 0"	6"	4' - 4 1/2"


* IF "B" EXCEEDS THE SPACING LISTED ON THE VERTICAL BRACE SPACING TABLE, ADD AN ADDITIONAL VERTICAL BRACE

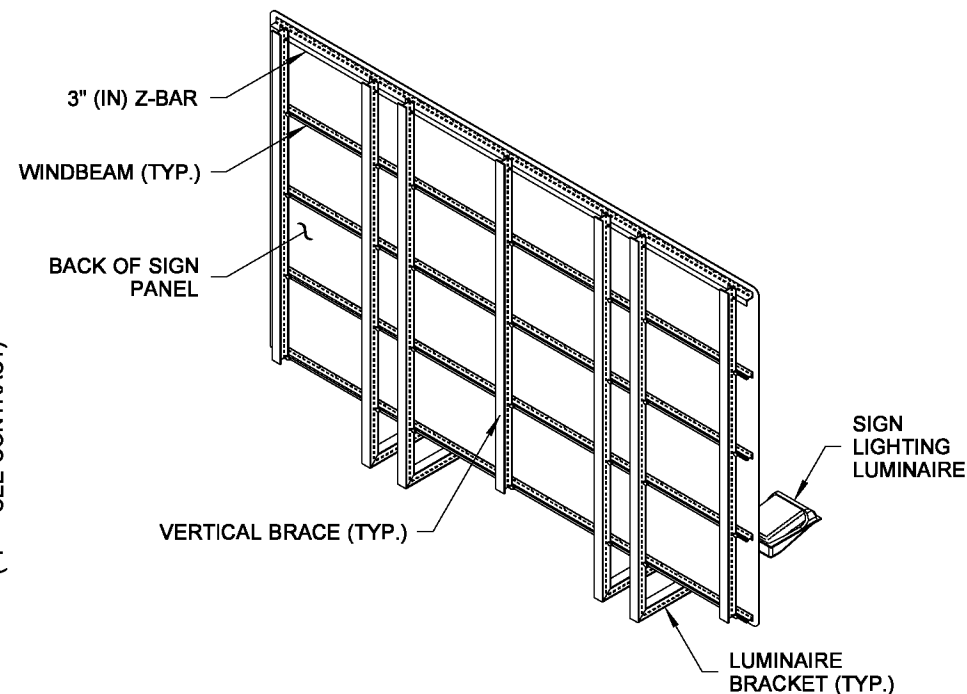

ISOMETRIC VIEW

NOTES

1. Install Sign Lighting Luminaires (and Brackets) only when required in the Contract.
2. All nuts, bolts, washers, and other hardware shall be stainless steel per **Standard Specification Section 9-28.11**, except as noted. Galvanize all non-stainless steel parts.
3. See **Standard Plan G-90.20** (Monotube), or **G-90.30** (Truss) for additional Overhead Sign Lighting details.

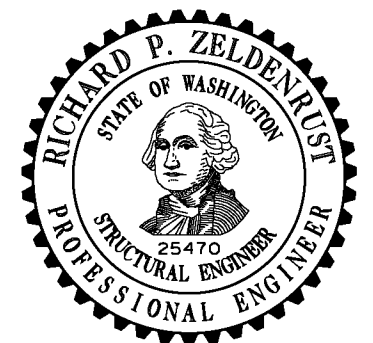

**OVERHEAD SIGN LIGHTING
BRACING**

STANDARD PLAN G-90.11-00

SHEET 1 OF 1 SHEET

APPROVED FOR PUBLICATION