

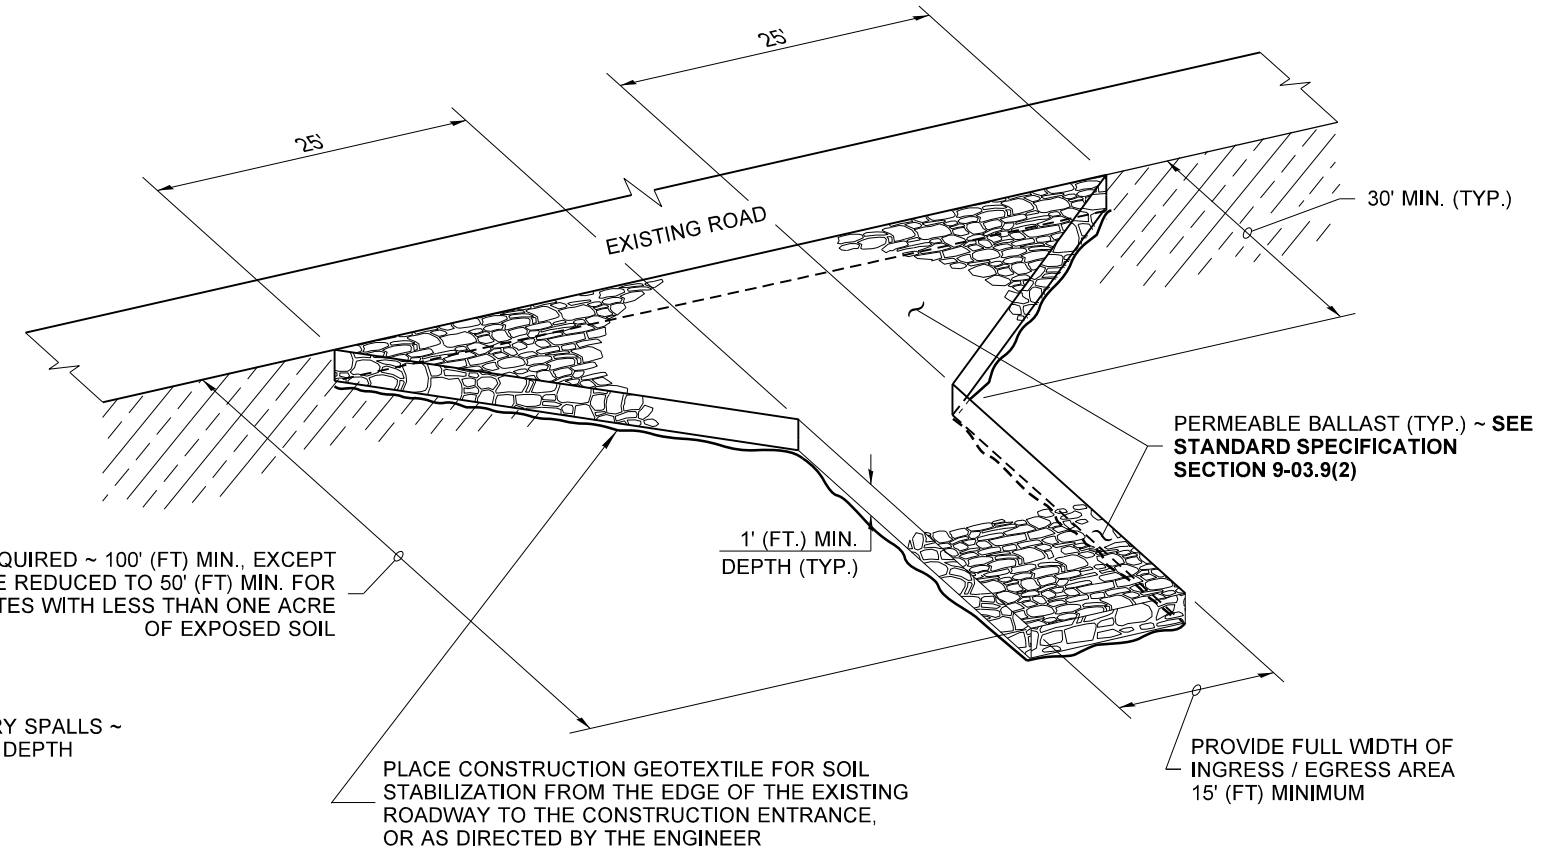
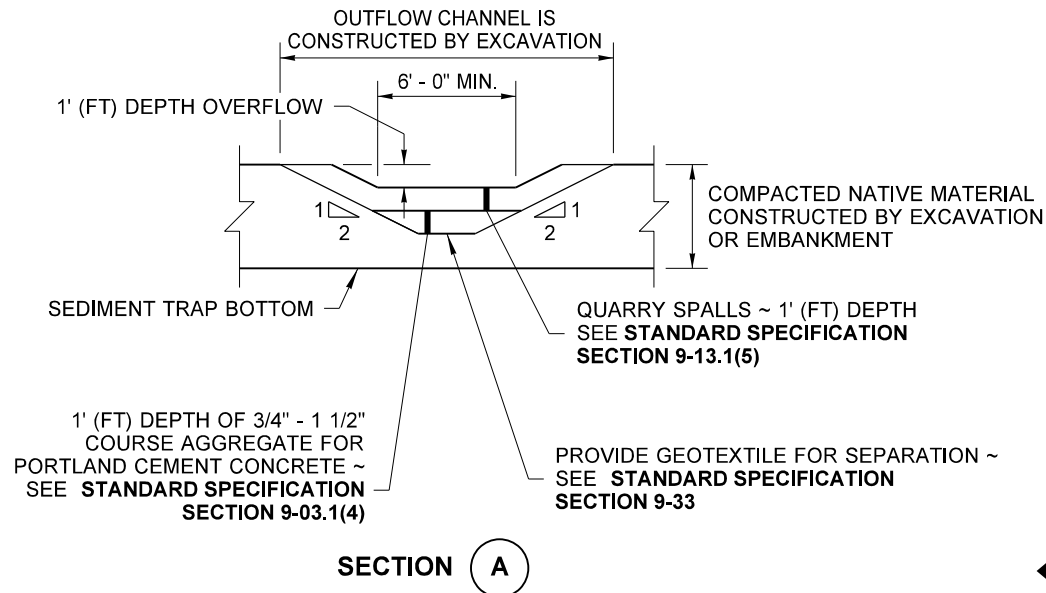


DRAWN BY: FERN LIDDELL

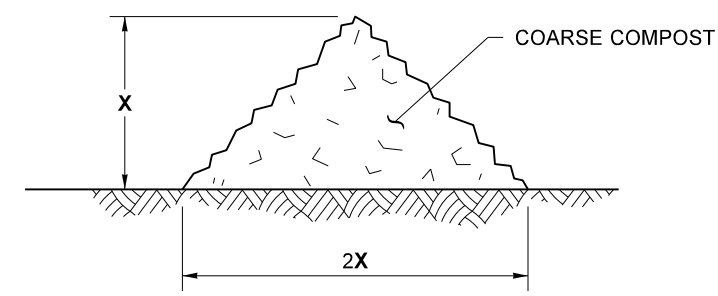


ISOMETRIC VIEW
STABILIZED CONSTRUCTION ENTRANCE
 STABILIZED CONSTRUCTION ENTRANCE SHALL MEET THE REQUIREMENTS OF STANDARD SPECIFICATION SECTION 8-01.3(7).

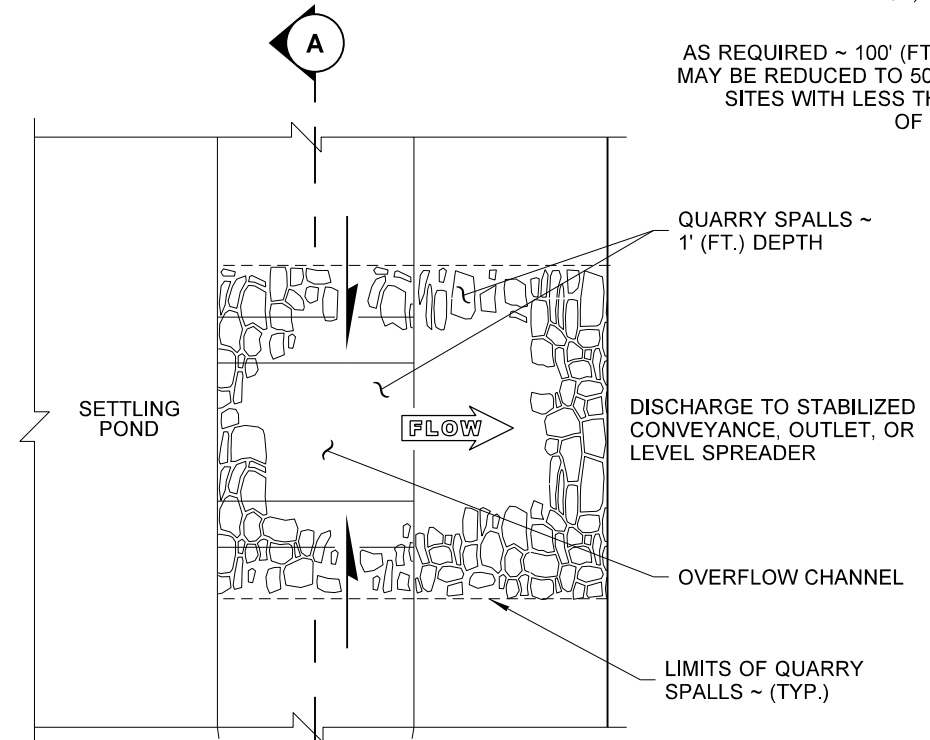

X = 1' - 0" FOR SLOPES 4H:1V OR FLATTER
 X = 1' - 6" FOR SLOPES STEEPER THAN 4H:1V

TYPICAL SECTION
COMPOST BERM DETAIL

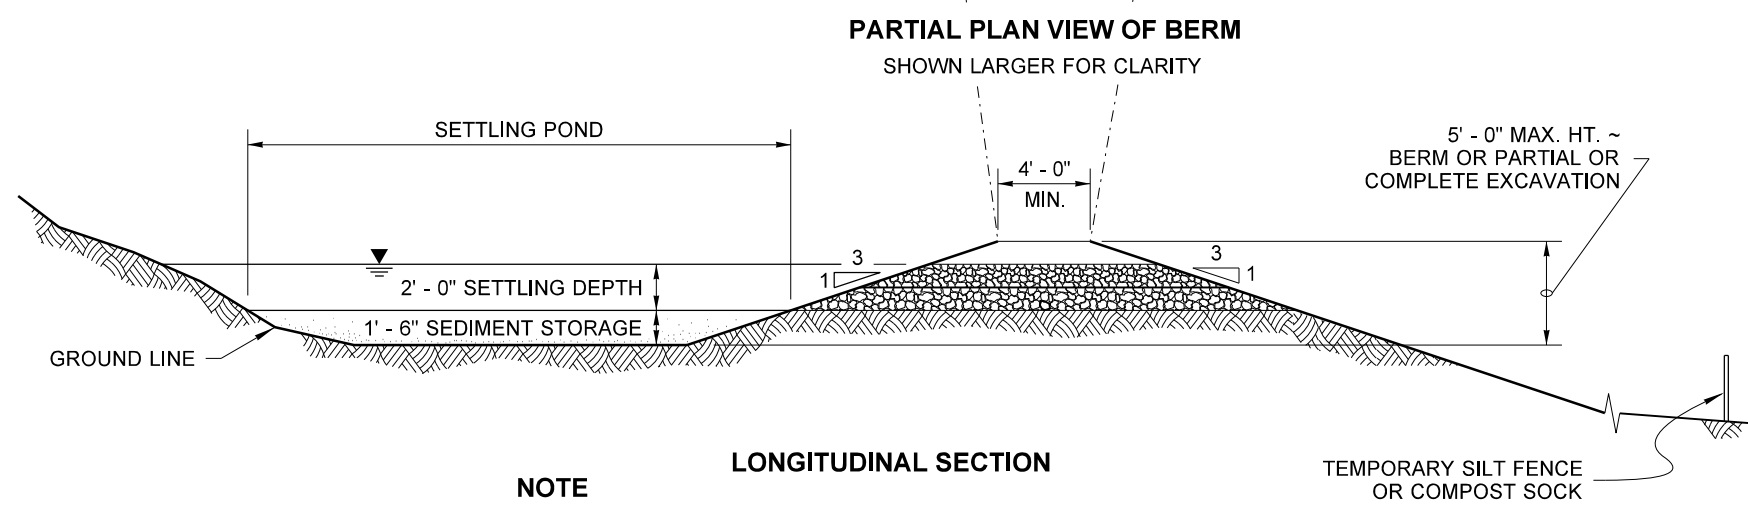

LONGITUDINAL SECTION

NOTE
 PLACE GEOTEXTILE UNDER THE SPILLWAY AND SIDE SLOPES. PROVIDE A CONTINUOUS LAYER BETWEEN THE GRAVEL/ROCK AND THE NATIVE EARTHEN MATERIAL.

TEMPORARY SEDIMENT TRAP



STATE OF WASHINGTON
 REGISTERED
 LANDSCAPE ARCHITECT
 JULI DEE HARTWIG
 LICENSE NO. 1422
 DATE: 06-21-17

MISCELLANEOUS
EROSION CONTROL DETAILS
STANDARD PLAN I-80.10-02

SHEET 1 OF 1 SHEET

APPROVED FOR PUBLICATION

STATE DESIGN ENGINEER
 Washington State Department of Transportation