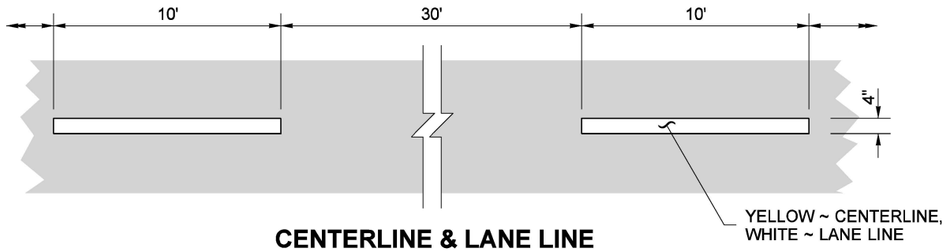

CENTERLINE & LANE LINE

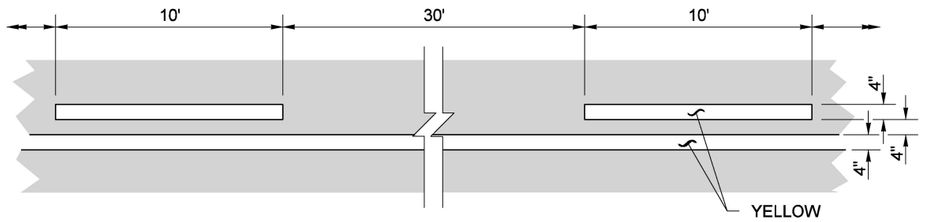

NO-PASS LINE & TWO-WAY LEFT-TURN CENTERLINE

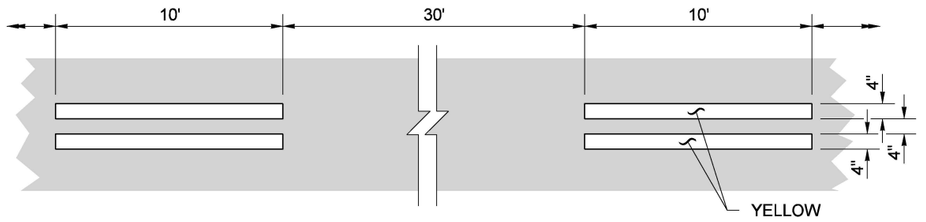

REVERSIBLE LANE LINE

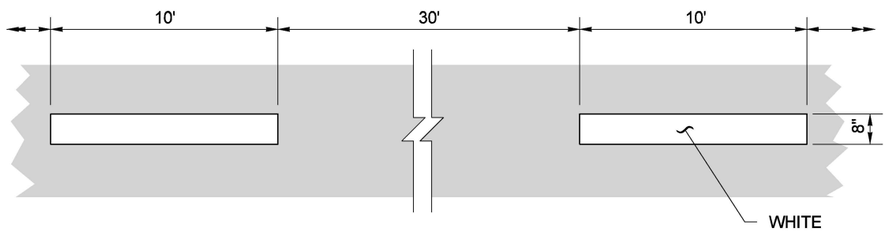

WIDE BROKEN LANE LINE

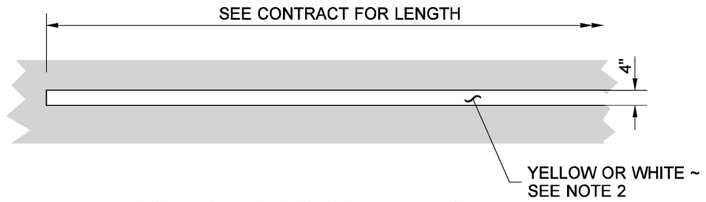

EDGE LINE & SOLID LANE LINE

NOTES

1. Dotted Extension Line shall be the same color as the line it is extending.
2. Edge Line shall be white on the right edge of traveled way, and yellow on the left edge of traveled way (on one-way roadways). Solid Lane Line shall be white.
3. The distance between the lines of the Double Centerline shall be 12" everywhere, except 4" for left-turn channelization and narrow roadways with lane widths of 10 feet or less. Local Agencies (on non-state routes) may specify a 4" distance for all locations.

   The distance between the lines of the Double Lane Line shall be 4".

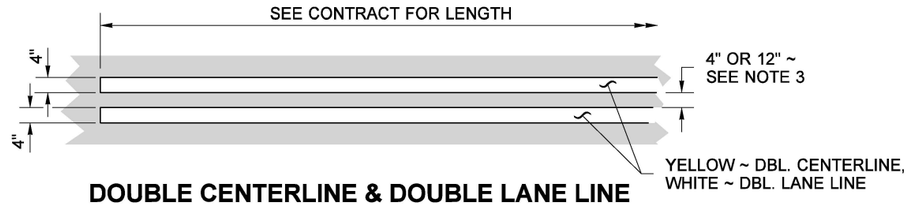

DOUBLE CENTERLINE & DOUBLE LANE LINE

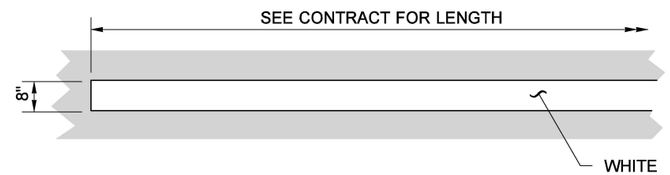

WIDE EDGE LINE & WIDE SOLID LANE LINE

OPTION TO USE AS CIRCULATORY ON ROUNDABOUT APPLICATIONS

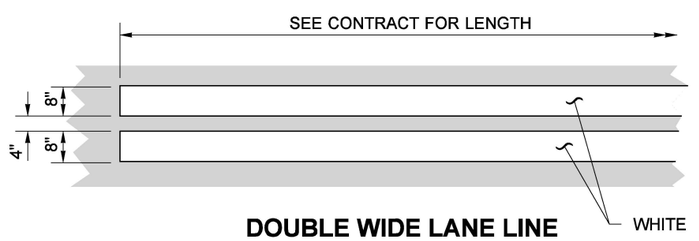

DOUBLE WIDE LANE LINE

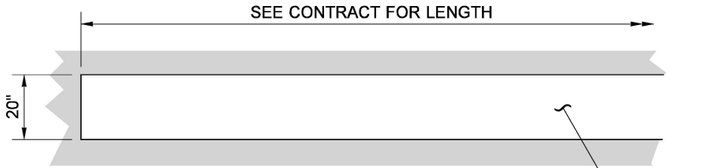

BARRIER CENTERLINE

DRAWN BY: FERN LIDDELL

BRIAN J. WALSH
STATE OF WASHINGTON
36103
REGISTERED
PROFESSIONAL ENGINEER

Walsh, Brian
Sep 23 2020 3:46 PM

cosign

LONGITUDINAL MARKING PATTERNS

STANDARD PLAN M-20.10-03

SHEET 1 OF 2 SHEETS

APPROVED FOR PUBLICATION

Date: 2020.09.25 14:58:51 -07'00'

STATE DESIGN ENGINEER

Washington State Department of Transportation

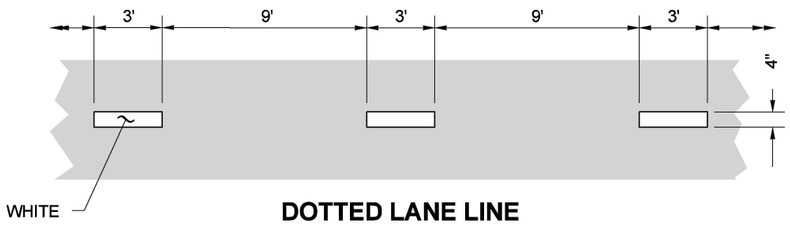

DOTTED LANE LINE

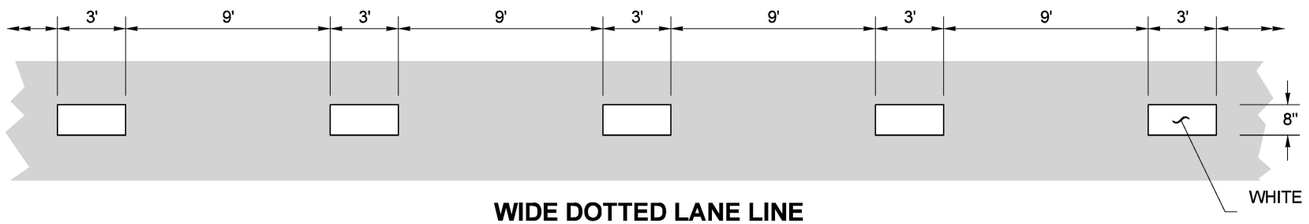

WIDE DOTTED LANE LINE

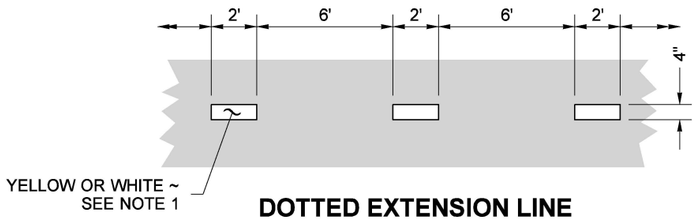

DOTTED EXTENSION LINE

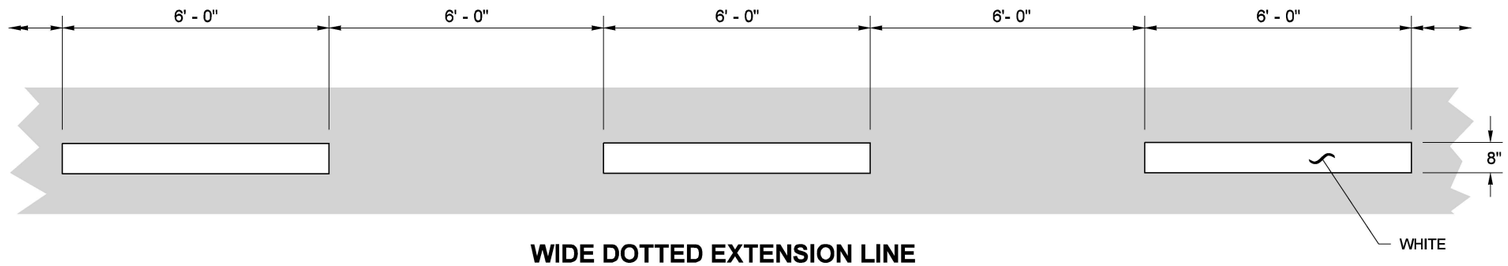

WIDE DOTTED EXTENSION LINE

DRAWN BY: FERN LIDDELL

Roundabout Specific Lines

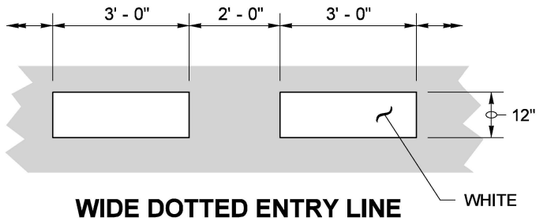

WIDE DOTTED ENTRY LINE

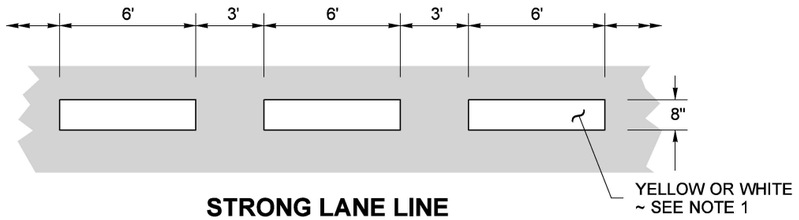

STRONG LANE LINE

OPTION TO USE AS CIRCULATORY ON ROUNDABOUT APPLICATIONS

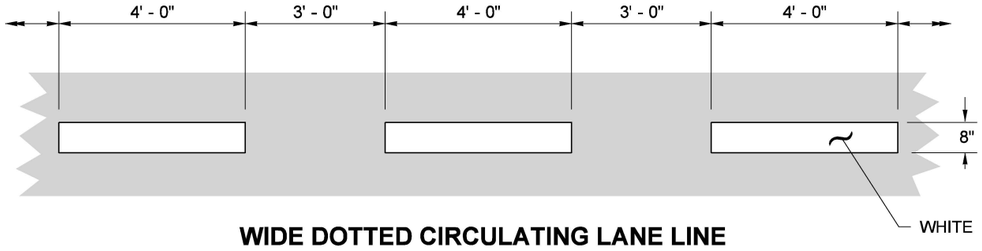

WIDE DOTTED CIRCULATING LANE LINE

BRIAN J. WALSH
STATE OF WASHINGTON
36103
REGISTERED
PROFESSIONAL ENGINEER

Walsh, Brian
Sep 23 2020 3:50 PM

cosign

LONGITUDINAL MARKING PATTERNS

STANDARD PLAN M-20.10-03

SHEET 2 OF 2 SHEETS

APPROVED FOR PUBLICATION
Date: 2020.09.25 14:59:30 -07'00'
STATE DESIGN ENGINEER
Washington State Department of Transportation