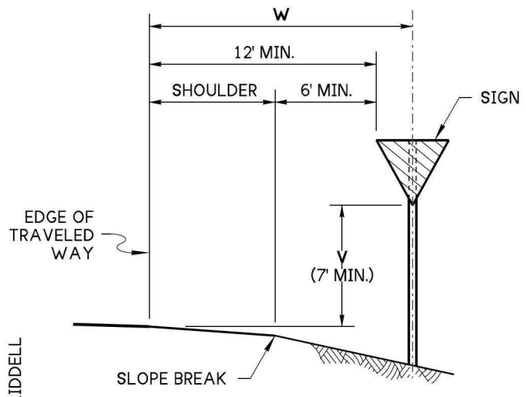

SIGN INSTALLATION IN FILL SECTION

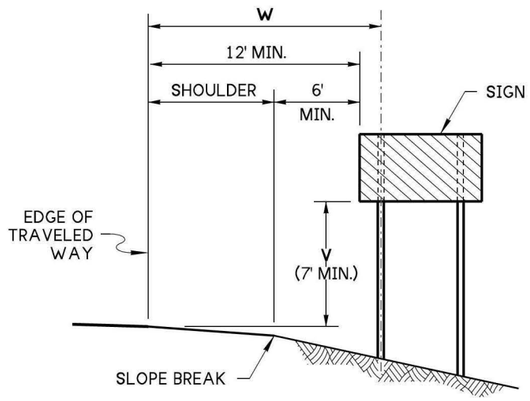

MULTIPLE SIGN POST INSTALLATION IN FILL SECTION

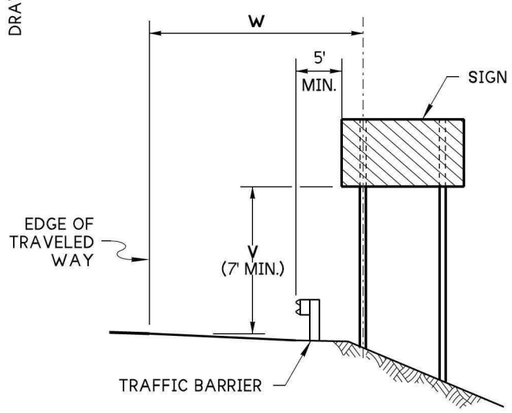

SIGN INSTALLATION BEHIND TRAFFIC BARRIER

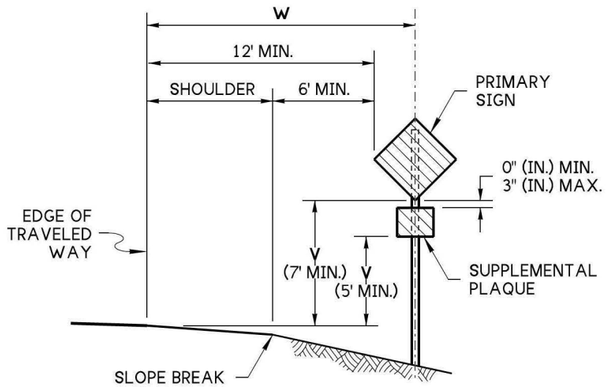

SIGN WITH SUPPLEMENTAL PLAQUE INSTALLATION IN FILL SECTION

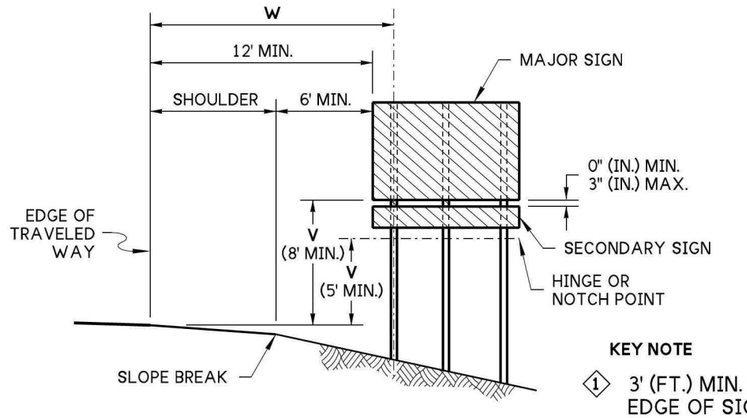

KEY NOTE

1. 3' (FT.) MIN. FROM ANY POINT ALONG BOTTOM EDGE OF SIGN PANEL TO THE GROUND.

GUIDE OR DIRECTIONAL SIGN WITH SECONDARY SIGN INSTALLATION ON EXPRESSWAYS AND FREEWAYS

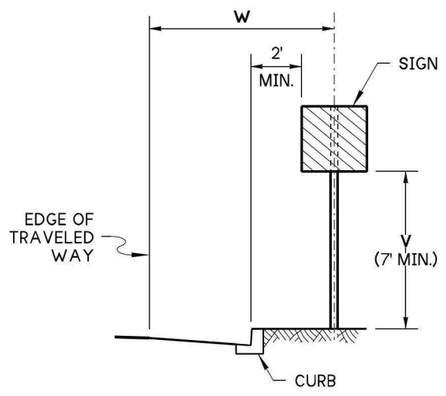

SIGN INSTALLATION IN CURB SECTION

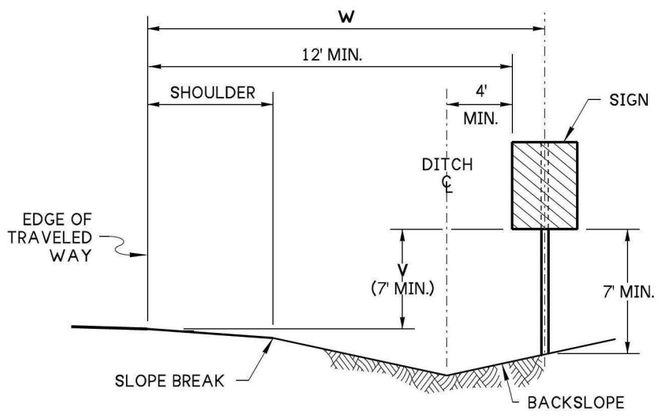

SIGN INSTALLATION IN DITCH SECTION

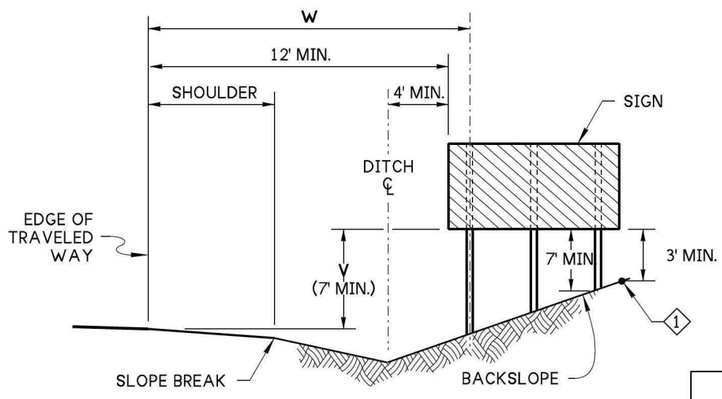

MULTIPLE SIGN POST INSTALLATION IN DITCH SECTION

NOTES

1. Refer to the Sign Specification Sheet of the Contract for the 'V' and 'W' distances.
2. The minimum vertical distance from the bottom of the sign to the ground shall not be less than 7' (ft.) for signs located within the Design Clear Zone.
3. Signs shall be installed so the bottom of the sign is no more than 1' (ft) above the minimum shown on this plan, unless specified in Contract Plans or approved by the Engineer.

DRAWN BY: FERN LIDDELL

DINA MARIA SWIRES
STATE OF WASHINGTON
33815
REGISTERED
PROFESSIONAL ENGINEER

Aug 24, 2026

GROUND MOUNTED SIGN PLACEMENT

STANDARD PLAN G-20.10-04

SHEET 1 OF 1 SHEET

APPROVED FOR PUBLICATION

Mark A Swires Aug 24, 2026

STATE DESIGN ENGINEER

Washington State Department of Transportation