

PCMS - ALT 1		
1	2	3
ROADWAY NARROWS 12' WIDE	SHOULDER DRIVING AHEAD	WATCH FOR SLOW TRAFFIC
1.5 SEC	1.5 SEC	1.5 SEC

USE IF TRAFFIC BACKUPS EXPECTED,
BUT NOT VERIFIED HOURLY BY TCS.

ONLY USED IF TCS VERIFIES HOURLY
THAT TRAFFIC BACKUPS ARE PRESENT

OPTIONAL DURING DAYLIGHT HOURS.
MAY REMAIN IN PLACE AFTER WORKING HOURS.

Diagram illustrating a lane shift work area during daylight hours. The diagram shows a cross-section of a road with the following dimensions and components:

- 10' EXISTING SHOULDER**: The leftmost section of the road.
- 12' MIN TEMP OPEN LANE**: The temporary open lane created by the shift.
- 2'**: The width of the existing lane being shifted.
- 9' MAX LANE SHIFT**: The maximum distance the lane is shifted from its original position.
- EXISTING LANE**: The original lane being shifted.
- EXISTING LANE**: The lane immediately to the right of the shifted lane.
- EXISTING SHOULDER**: The rightmost section of the road.
- WORK AREA**: The total area where the lane shift is taking place, encompassing the shifted lane and the adjacent existing lane.

The diagram also shows a traffic cone at the start of the work area and a yellow flag marking the edge of the temporary open lane.

SECTION (A-A)

STATIONARY TRANSPORTABLE ATTENUATOR ROLL AHEAD DISTANCE = R	
HOST VEHICLE WEIGHT	R
LESS THAN 22,000 lbs.	123'
22,000+ lbs.	100'

MAXIMUM CHANNELIZATION DEVICE SPACING (feet)		
MPH	TAPER	TANGENT
45	40	80



1. miniPCMS PERMITTED ON 2-LANE FREEWAYS.
2. ON 2-LANE FREEWAYS, LEFT SHOULDER SIGNAGE OPTIONAL IF PAVED SHOULDER WIDTH IS LESS THAN 6 FEET.
3. IF FEASIBLE, AVOID PLACING LANE CLOSURE OR LANE SHIFT TAPERS WITHIN OR IMMEDIATELY FOLLOWING HORIZONTAL CURVES.
4. BUFFER SPACE MAY BE ADJUSTED (±) BASED ON FIELD CONDITIONS. DISTANCE INCREASES AS WORK AREA MOVES DOWNSTREAM.
5. RELOCATE W23-6 & RSDS AS WORK ZONE MOVES DOWNSTREAM. IF ENGINEER ACCEPTS, ADDITIONAL W23-6 & RSDS MAY BE ADDED PRIOR TO EACH WORK CREW.
6. RED/WHITE OR BLACK/YELLOW CHEVRON PATTERN OK. SECOND TRANSPORTABLE ATTENUATOR IN RIGHT LANE IS OPTIONAL. ADDITIONAL TRANSPORTABLE ATTENUATORS MAY BE ADDED BEHIND EACH WORK CREW.
7. IF USED, PLACE DEVICES TRANSVERSELY ACROSS CLOSED LANES AT 45°± AND 5' SPACING AT STRATEGIC LOCATIONS.
8. CONTACT WSDOT COMMERCIAL VEHICLE SERVICES (360-704-6340) AT LEAST 7 DAYS IN ADVANCE OF ROADWAY WIDTH RESTRICTIONS.
9. WHEN SHOULDER NARROWS, USE LANE SHIFT (40:1 SHIFT TAPER @ 16' MIN WIDTH) WITH W1-4 SIGN (5' MIN) 500'± PRIOR TO SHIFT AND W1-6 SIGN AT SHIFT TAPER.
10. COVER ALL CONFLICTING SIGNAGE PER STD. SPEC. 1-10.3(3)A. BLACK 1/8" ABS OR 1/4" PLYWOOD TEMP. SIGN COVER PERMITTED.
11. DOWNSTREAM TAPER OPTIONAL ACROSS RIGHT LANE, BUT FIRST 80' REQUIRED. DOWNSTREAM TAPER DEVICE SPACING IS 20'.
12. SIGNS ARE BLACK ON ORANGE UNLESS OTHERWISE INDICATED.

13. PLAN IS APPLICABLE TO LANE CLOSURES OF 7 DAYS OR LESS.
14. NOTIFY PUBLIC OF SPEED REDUCTION AT LEAST 3 DAYS PRIOR VIA PCMS:
45 MPH WZ SPEED LIMIT / BEGINS DAYOFWEEK MM/DD/YY @ 2.0 SEC.
15. ADD W21-30-SERIES SIGNS (48"x48", 5' HEIGHT) 500'± PRIOR TO FREQUENT
CONSTRUCTION VEHICLES INGRESS/EGRESS INTO THE OPEN LANE(S).
16. BICYCLIST ACCOMMODATIONS, WHERE FACILITY OPEN TO BICYCLES:
(A) BICYCLES PROHIBITED VIA R5-601 & R5-6 SIGNS. PROVIDE SIGNED DETOUR
OR ALTERNATIVE ROUTE.
(B) BICYCLES PROHIBITED VIA R5-601 & R5-6 SIGNS. PROVIDE FREE SHUTTLE
(WORK TRUCK, VAN, OR BUS OK) + CONTACT INFORMATION OR PHONE BO
(C) ENGINEER TO ACCEPT ANY ALTERNATIVE STRATEGIES.



**FREEWAY (2 LANES): SINGLE RIGHT LANE CLOSURE, 9' MAX LEFT SHOULDER SHIFT
(45 MPH WORK ZONE SPEED LIMIT, 40 MPH ADVISORY SPEED)**

NOT TO SCALE

FILE NAME C:\Users\LintzF\OneDrive - Washington State Department of Transportation\Desktop\Work Zone TCPS\1258Fwy1RtLanes9MaxLtShift60to45WZSL40Adv.dgn										Plot 1
TIME 7:56:11 AM						REGION NO. STATE		FED.AID PROJ.NO.		PLAN REF NO.
DATE 1/8/2024						10 WASH				TC258
PLOTTED BY LintzF						JOB NUMBER				
DESIGNED BY										
ENTERED BY										
CHECKED BY						CONTRACT NO.		LOCATION NO.		SHEET 1A OF 3 SHEETS
PROJ. ENGR.										TYPICAL TRAFFIC CONTROL PLANS
REGIONAL ADM.		REVISION		DATE BY		DATE		DATE		
								P.E. STAMP BOX		
								P.E. STAMP BOX		


3-MILE QUEUE WARNING SYSTEM MESSAGES					
TRAFFIC SENSORS		PCMS 2		PCMS 1	
B	A	1	2	1	2
TRIGGER	SPEED	2.0 SEC	2.0 SEC	2.0 SEC	2.0 SEC
35+ MPH	35+ MPH	RIGHT LANE CLOSURE	3 MILES AHEAD	ROADWAY NARROWS 12' WIDE	SHOULDER DRIVING AHEAD
35+ MPH	< 35 MPH	LANE CLOSURE 3 MILES	ROADWAY NARROWS 12' WIDE	SLOW OR STOPPED TRAFFIC	NEXT 1.5 MILES
< 35 MPH	< 35 MPH	SLOW OR STOPPED TRAFFIC	NEXT 3 MILES	USE ALL LANES	TAKE TURNS AT MERGE

SEE QUEUE WARNING SYSTEM SPECIAL PROVISION OR RFP FOR DETAILS.

LOCATE PCMSs PER STD. SPEC. 1-10.3(3)C. PCMS MAY BE PLACED ON OPPOSITE SHOULDER WHEN NEEDED, BUT AVOID RAMP GORES. WHEN PCMSs OR TRAFFIC SENSORS PLACED BEHIND BARRIER/GUARDRAIL OR WITHIN CLOSED LANE, TRANSVERSE TRAFFIC DRUMS ARE NOT REQUIRED.

ADJUST QWS COMPONENTS AS NEEDED TO AVOID CONFLICTS WITH TRAFFIC CONTROL DEVICES, NARROW SHOULDERS, RAMPS, OR TO MAINTAIN VISIBILITY OF SEQUENTIAL ARROW SIGN.


IN THE EVENT OF A SYSTEM FAILURE, SEE SPECIAL PROVISIONS OR RFP "QUEUE WARNING SYSTEM FAILURE PROTOCOL".

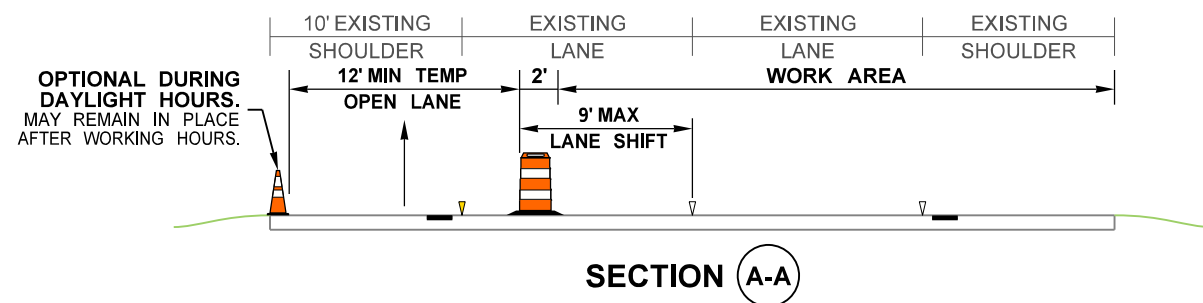

SHOULDER CLOSURE TAPER LENGTH = L/3	
SHOULDER WIDTH	L/3
< 6'	80'
6'	120'
10'	200'

STATIONARY TRANSPORTABLE ATTENUATOR ROLL AHEAD DISTANCE = R	
HOST VEHICLE WEIGHT	R
LESS THAN 22,000 lbs.	123'
22,000+ lbs.	100'

MAXIMUM CHANNELIZATION DEVICE SPACING (feet)		
MPH	TAPER	TANGENT
45	40	80

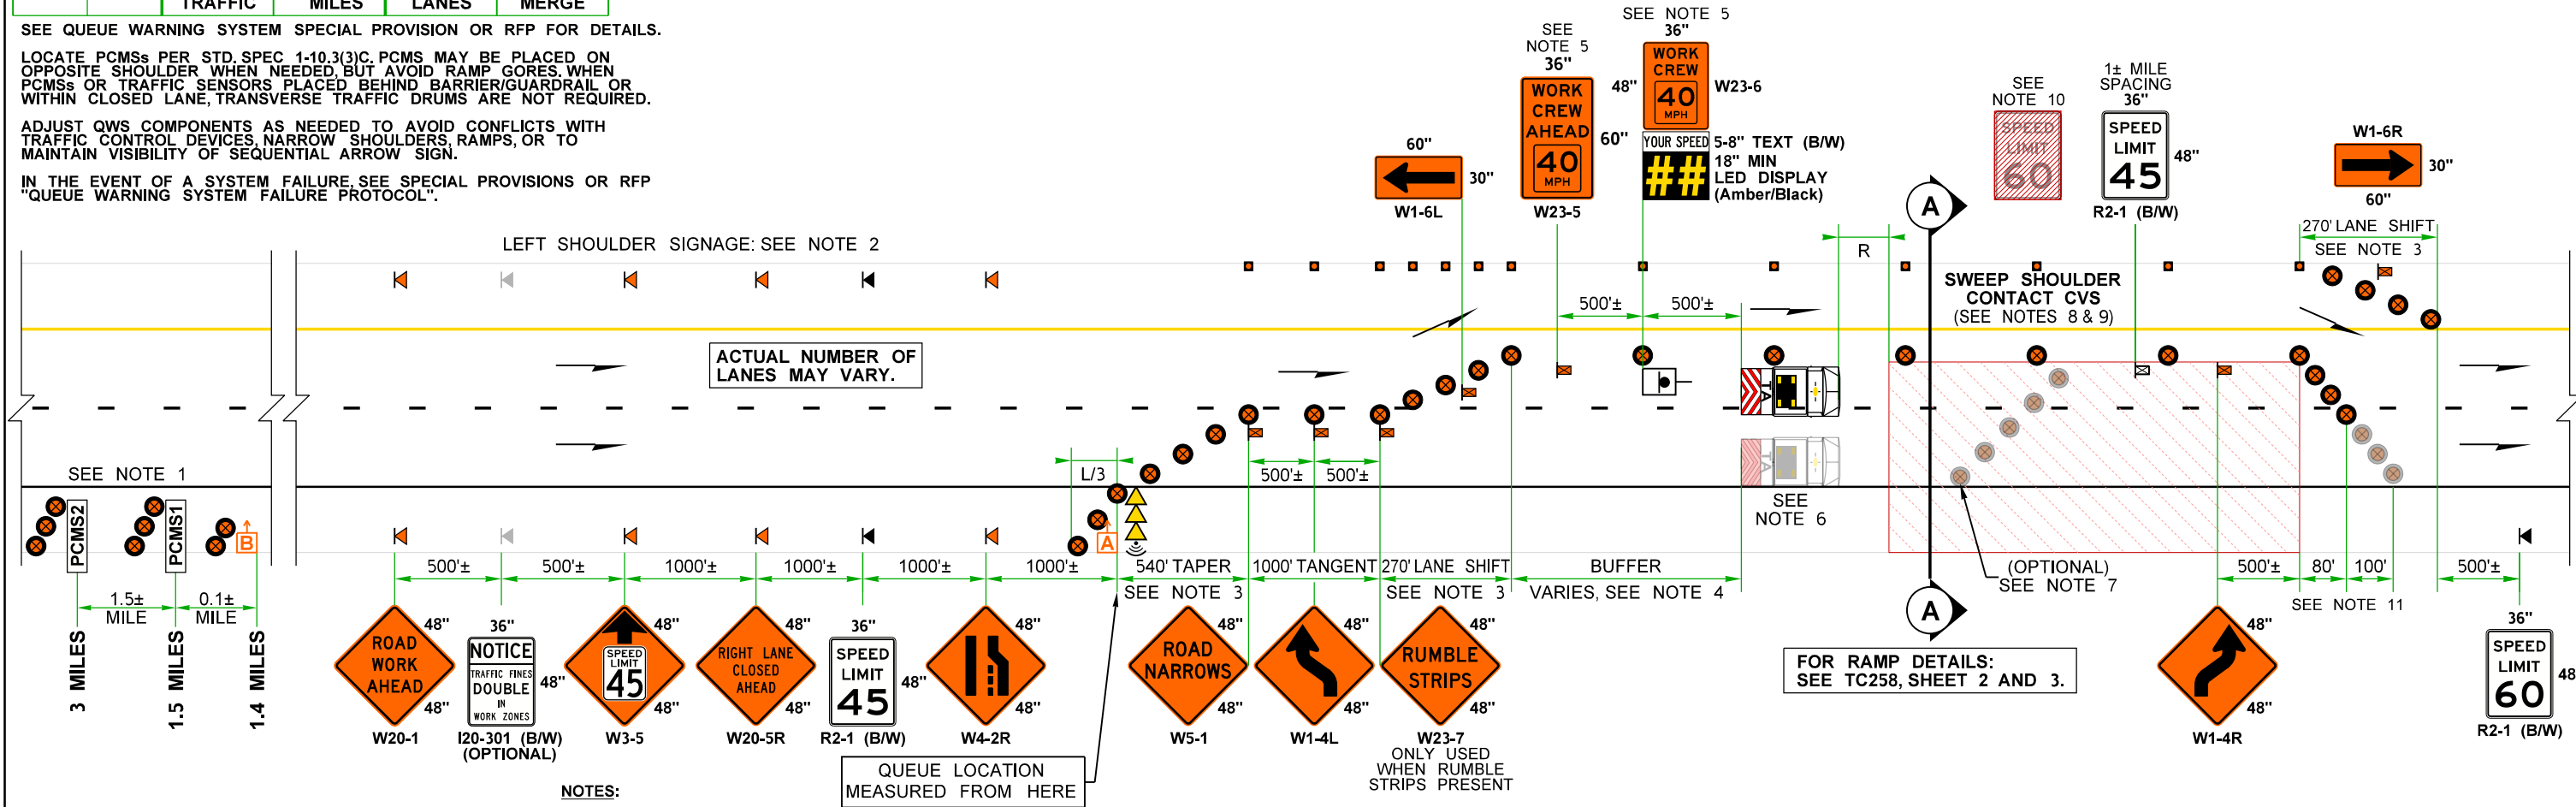

NOTES:

- miniPCMS PERMITTED ON 2-LANE FREEWAYS.
- ON 2-LANE FREEWAYS, LEFT SHOULDER SIGNAGE OPTIONAL IF PAVED SHOULDER WIDTH IS LESS THAN 6 FEET.
- IF FEASIBLE, AVOID PLACING LANE CLOSURE OR LANE SHIFT TAPERS WITHIN OR IMMEDIATELY FOLLOWING HORIZONTAL CURVES.
- BUFFER SPACE MAY BE ADJUSTED (±) BASED ON FIELD CONDITIONS. DISTANCE INCREASES AS WORK AREA MOVES DOWNSTREAM.
- RELOCATE W23-6 & RSDS AS WORK ZONE MOVES DOWNSTREAM. IF ENGINEER ACCEPTS, ADDITIONAL W23-6 & RSDS MAY BE ADDED PRIOR TO EACH WORK CREW.
- RED/WHITE OR BLACK/YELLOW CHEVRON PATTERN OK. SECOND TRANSPORTABLE ATTENUATOR IN RIGHT LANE IS OPTIONAL. ADDITIONAL TRANSPORTABLE ATTENUATORS MAY BE ADDED BEHIND EACH WORK CREW.

- IF USED, PLACE DEVICES TRANSVERSELY ACROSS CLOSED LANES AT 45°± AND 5' SPACING AT STRATEGIC LOCATIONS.
- CONTACT WSDOT COMMERCIAL VEHICLE SERVICES (360-704-6340) AT LEAST 7 DAYS IN ADVANCE OF ROADWAY WIDTH RESTRICTIONS.
- WHEN SHOULDER NARROWS, USE LANE SHIFT (40:1 SHIFT TAPER @ 16' MIN WIDTH) WITH W1-4 SIGN (5' MIN) 500'± PRIOR TO SHIFT AND W1-6 SIGN AT SHIFT TAPER.
- COVER ALL CONFLICTING SIGNAGE PER STD. SPEC. 1-10.3(3)A. BLACK 1/8" ABS OR 1/4" PLYWOOD TEMP. SIGN COVER PERMITTED.
- DOWNSTREAM TAPER OPTIONAL ACROSS RIGHT LANE, BUT FIRST 80' REQUIRED. DOWNSTREAM TAPER DEVICE SPACING IS 20'.
- SIGNS ARE BLACK ON ORANGE UNLESS OTHERWISE INDICATED.

- PLAN IS APPLICABLE TO LANE CLOSURES OF 7 DAYS OR LESS.

- NOTIFY PUBLIC OF SPEED REDUCTION AT LEAST 3 DAYS PRIOR VIA PCMS: 45 MPH WZ SPEED LIMIT / BEGINS DAYOFWEEK MM/DD/YY @ 2.0 SEC.

- ADD W21-30-SERIES SIGNS (48"x48", 5' HEIGHT) 500'± PRIOR TO FREQUENT CONSTRUCTION VEHICLES INGRESS/EGRESS INTO THE OPEN LANE(S).

- BICYCLIST ACCOMMODATIONS, WHERE FACILITY OPEN TO BICYCLES:
(A) BICYCLES PROHIBITED VIA R5-601 & R5-6 SIGNS. PROVIDE SIGNED DETOUR OR ALTERNATIVE ROUTE.
(B) BICYCLES PROHIBITED VIA R5-601 & R5-6 SIGNS. PROVIDE FREE SHUTTLE (WORK TRUCK, VAN, OR BUS OK) + CONTACT INFORMATION OR PHONE BOX.
(C) ENGINEER TO ACCEPT ANY ALTERNATIVE STRATEGIES.

LEGEND:	
	TEMPORARY SIGN LOCATION (1' MIN HEIGHT)
	TEMPORARY SIGN LOCATION (5' MIN HEIGHT)
	28" TRAFFIC CONE
	TRAFFIC SAFETY DRUM
	QWS TRAFFIC SENSOR
	RADAR SPEED DISPLAY SIGN (RSDS)
	SMART SEQUENTIAL ARROW SIGN (CONNECTED)
	TRANSPORTABLE ATTENUATOR
	PORTABLE CHANGEABLE MESSAGE SIGN


FREEWAY (2 LANES): SINGLE RIGHT LANE CLOSURE, 9' MAX LEFT SHOULDER SHIFT (45 MPH WORK ZONE SPEED LIMIT, 40 MPH ADVISORY SPEED)

NOT TO SCALE



FILE NAME C:\Users\LintzF\OneDrive - Washington State Department of Transportation\Desktop\Work Zone TCPs\1258Fwy1RtLanes9MaxLtShift60to45WZSL40Adv.dgn		REGION NO. 10 STATE WASH		FED.AID PROJ.NO.		DATE		DATE		Wash State Department of Transportation		Plot 2	
TIME 7:56:12 AM		JOB NUMBER		LOCATION NO.		P.E. STAMP BOX		P.E. STAMP BOX		TYPICAL TRAFFIC CONTROL PLANS		SHEET 1B OF 3 SHEETS	
DATE 1/8/2024		CONTRACT NO.											
DESIGNED BY LintzF													
ENTERED BY													
CHECKED BY													
PROJ. ENGR.													
REGIONAL ADM.		REVISION		DATE		BY							

FILE NAME C:\Users\LintzF\OneDrive - Washington State Department of Transportation\Desktop\Work Zone TCPS\258Fwy1RtLanes9MaxLtShlft60to45WZSL40Adv.dgn										Plot 3	
TIME 7:56:12 AM						REGION NO.		STATE		FED.AID PROJ.NO.	
DATE 1/8/2024						10		WASH			
PLOTTED BY LintzF						JOB NUMBER					
DESIGNED BY										LOCATION NO.	
ENTERED BY											
CHECKED BY											
PROJ. ENGR.						CONTRACT NO.					
REGIONAL ADM.		REVISION		DATE		BY					



Washington State
Department of Transportation



TYPICAL TRAFFIC CONTROL PLANS

P.E. STAMP BOX DATE

P.E. STAMP BOX DATE


SHEET
2A
OF
3
SHEETS

- NOTES:**
17. FOR LEGEND, TABLES, AND ADDITIONAL NOTES: SEE TC258, SHEET 1A OR 1B.
18. FOR RIGHT RAMP DETAILS FOR A SINGLE RIGHT LANE CLOSURE (WITHOUT SHOULDER SHIFT) SEE TC107, SHEET 2B. ADD R2-1 (45) SIGN AFTER ON-RAMP MERGES NEAR COVERED EXISTING SPEED LIMIT SIGN.
19. SEE DETOUR PLAN FOR ADDITIONAL RAMP CLOSURE DETOUR SIGNAGE.

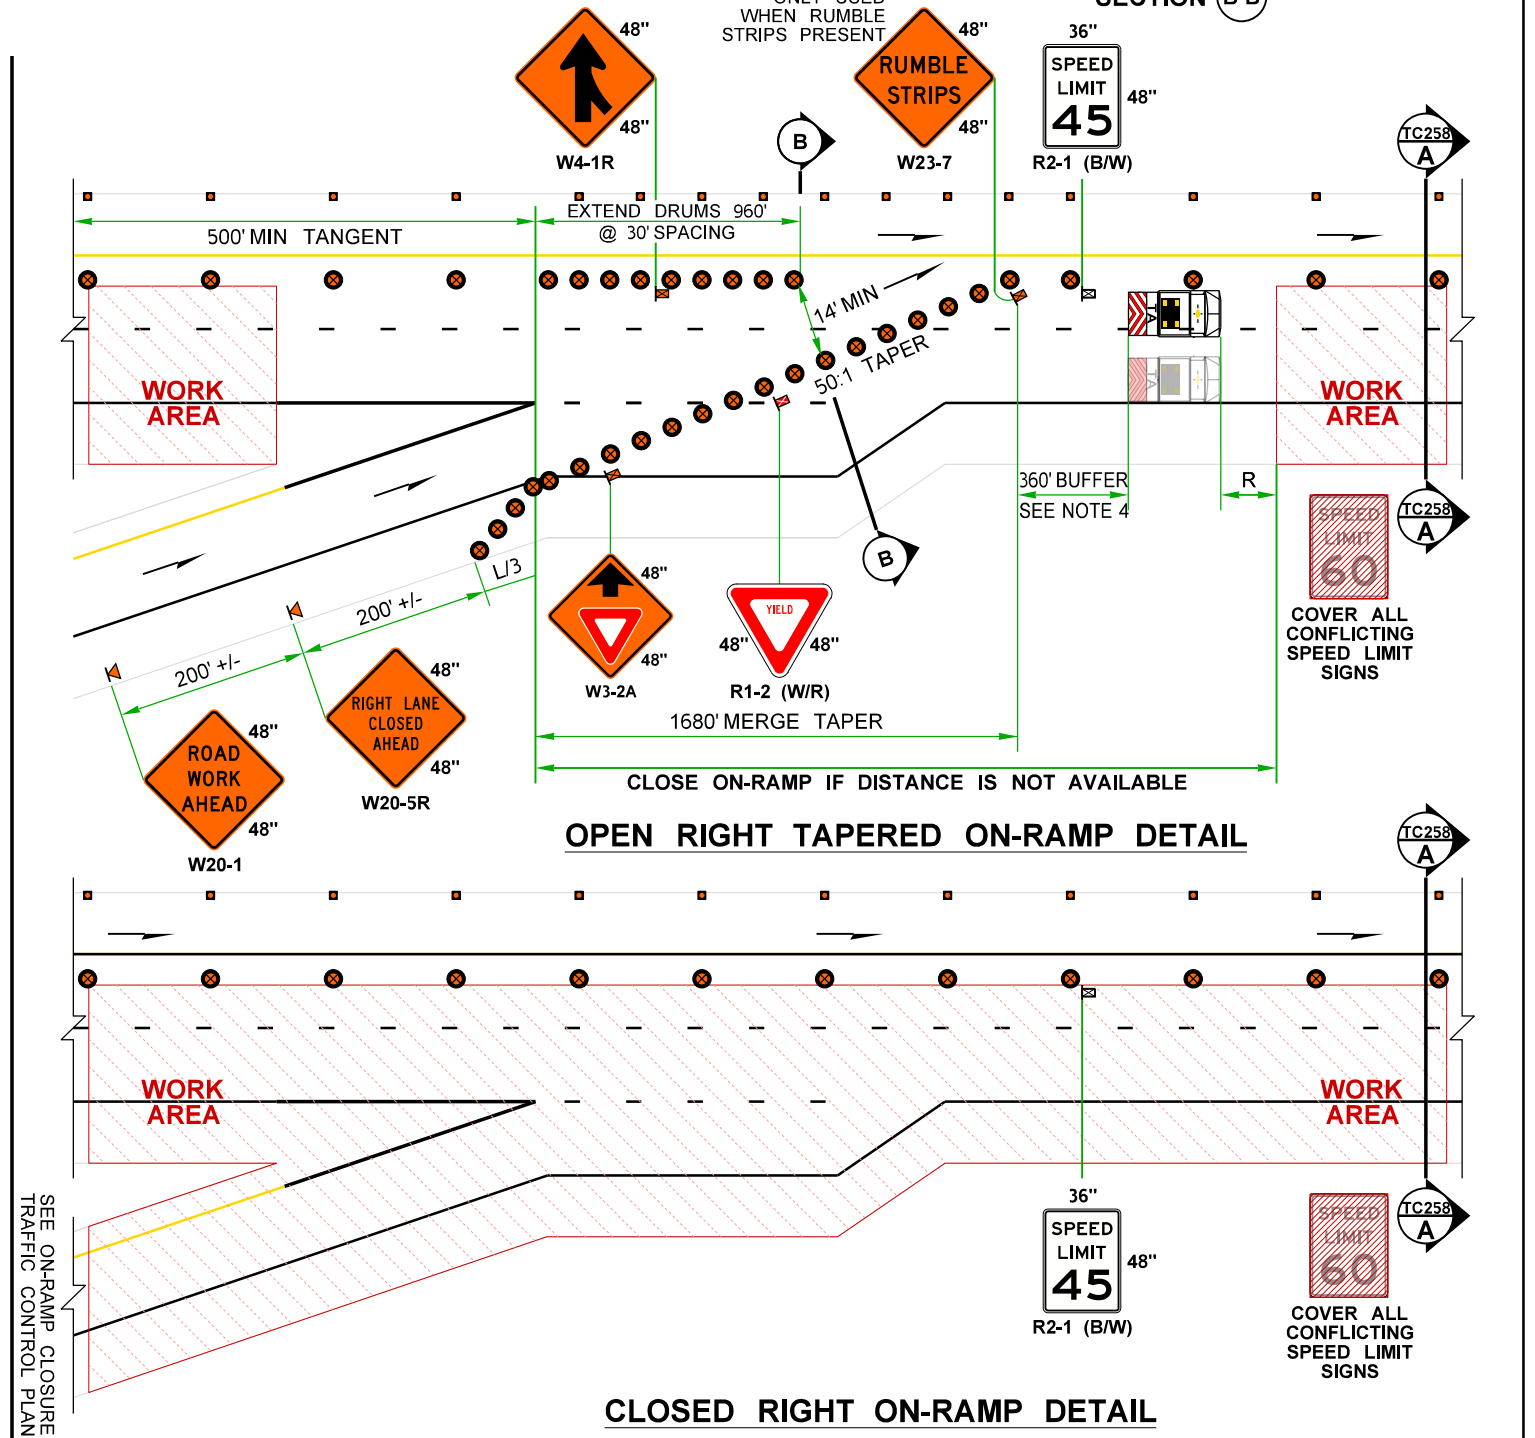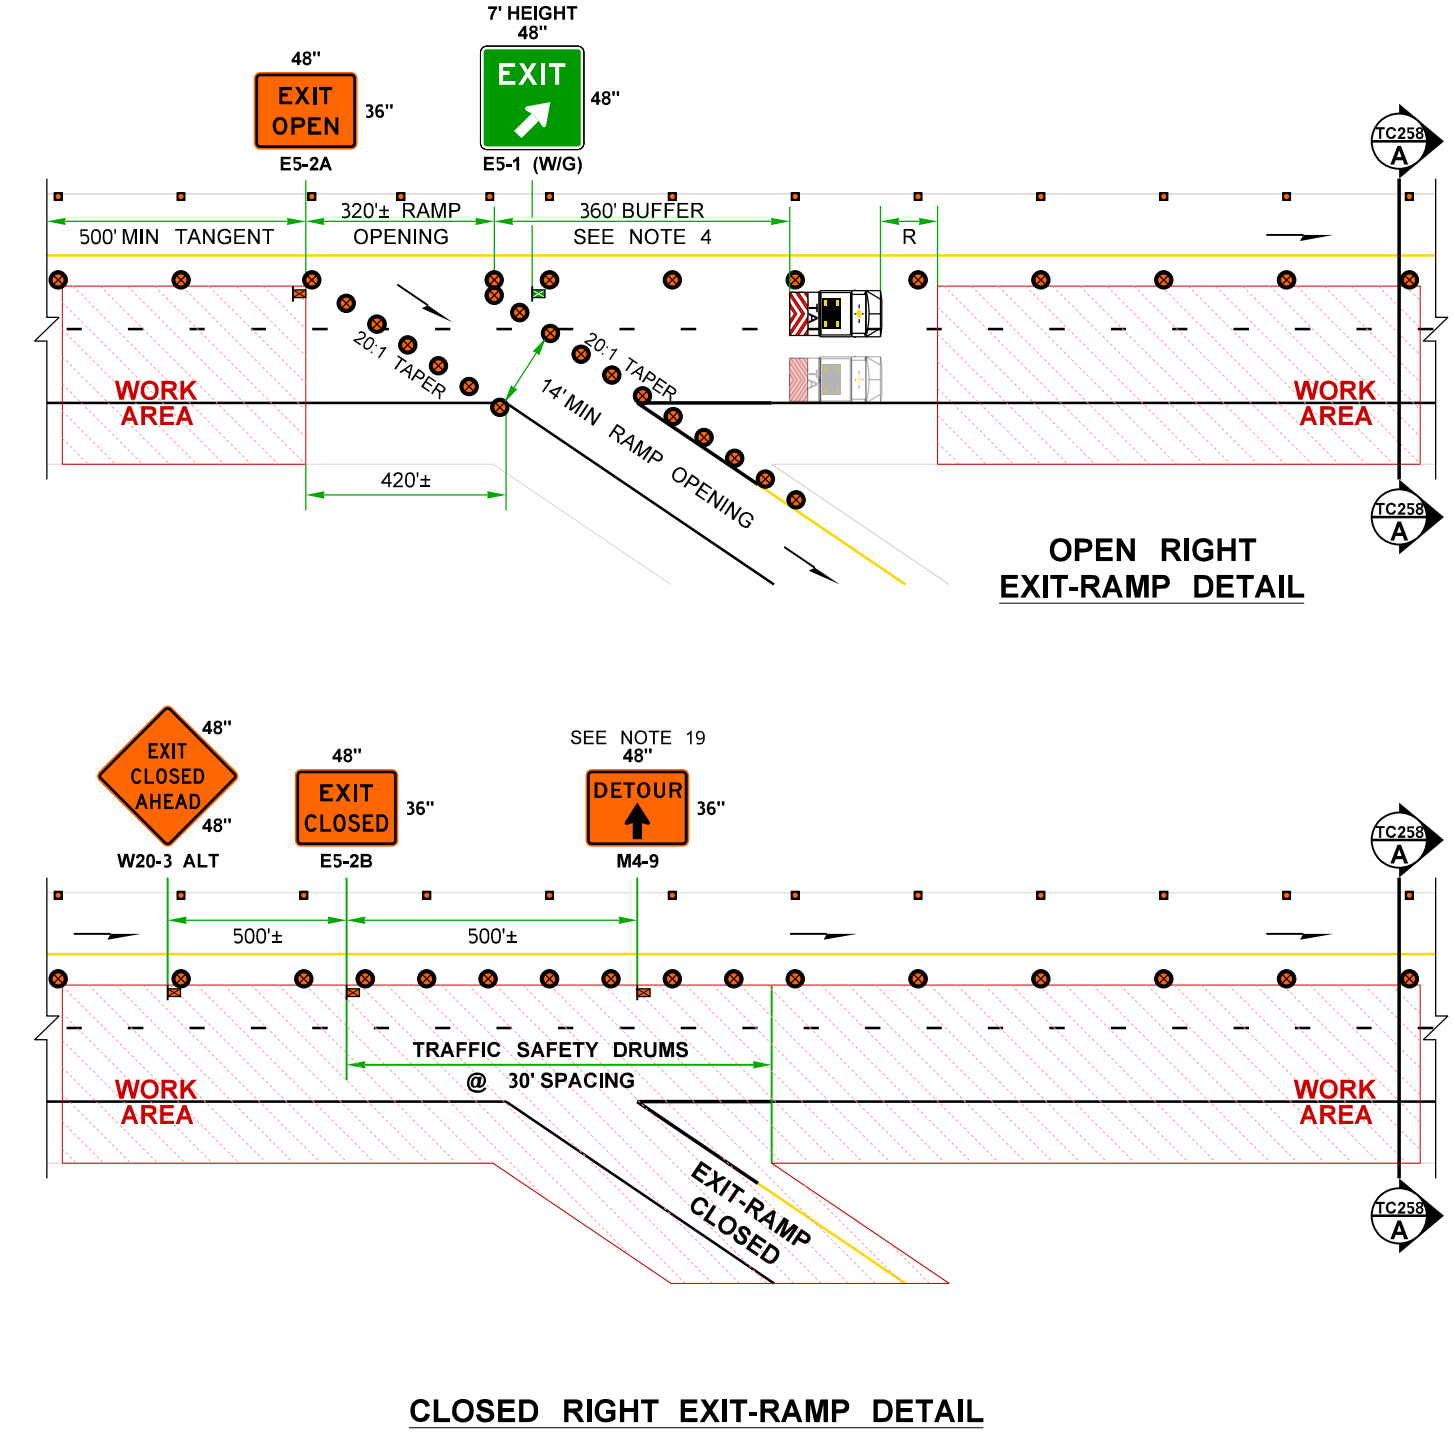

FREEWAY (2 LANES): SINGLE RIGHT LANE CLOSURE, 9' MAX LEFT SHOULDER SHIFT (45 MPH WORK ZONE SPEED LIMIT, 40 MPH ADVISORY SPEED)

FILE NAME		C:\Users\LintzF\OneDrive - Washington State Department of Transportation\Desktop\Work Zone TCPs\258Fwy1RtLanes9MaxLtShift60to45WZSL40Adv.dgn		REGION NO.		STATE		FED.AID PROJ.NO.		Plot 4	
TIME		7:56:13 AM		10		WASH				TC258	
DATE		1/8/2024									
PLOTTED BY		LintzF									
DESIGNED BY											
ENTERED BY											
CHECKED BY											
PROJ. ENGR.											
REGIONAL ADM.											
		REVISION		DATE		BY		LOCATION NO.		SHEET 2B OF 3 SHEETS	
										TYPICAL TRAFFIC CONTROL PLANS	

FILE NAME C:\Users\LintzF\OneDrive - Washington State Department of Transportation\Desktop\Work Zone TCPS\258Fwy1RtLanes9MaxLtShlft60to45WZSL40Adv.dgn										Plot 5	
TIME 7:56:13 AM						REGION NO.		STATE		FED.AID PROJ.NO.	
DATE 1/8/2024						10		WASH			
PLOTTED BY LintzF						JOB NUMBER					
DESIGNED BY										 Washington State Department of Transportation	
ENTERED BY											
CHECKED BY											
PROJ. ENGR.						CONTRACT NO.		LOCATION NO.		TYPICAL TRAFFIC CONTROL PLANS	
REGIONAL ADM.		REVISION		DATE		BY					
										P.E. STAMP BOX _____ DATE _____ P.E. STAMP BOX _____ DATE _____	

PCMS - ALT 1		
1	2	3
ROADWAY NARROWS 12' WIDE	SHOULDER DRIVING AHEAD	WATCH FOR SLOW TRAFFIC
1.5 SEC	1.5 SEC	1.5 SEC

USE IF TRAFFIC BACKUPS EXPECTED,
BUT NOT VERIFIED HOURLY BY TCS.


ONLY USED IF TCS VERIFIES HOURLY
THAT TRAFFIC BACKUPS ARE PRESENT.

[illegible]

1. miniPCMS PERMITTED ON 2-LANE FREEWAYS.
2. ON 2-LANE FREEWAYS, LEFT SHOULDER SIGNAGE OPTIONAL IF PAVED SHOULDER WIDTH IS LESS THAN 6 FEET.
3. IF FEASIBLE, AVOID PLACING LANE CLOSURE OR LANE SHIFT TAPERS WITHIN OR IMMEDIATELY FOLLOWING HORIZONTAL CURVES.
4. BUFFER SPACE MAY BE ADJUSTED (\pm) BASED ON FIELD CONDITIONS. DISTANCE INCREASES AS WORK AREA MOVES DOWNSTREAM.
5. RELOCATE W23-6 & RSDS AS WORK ZONE MOVES DOWNSTREAM. IF ENGINEER ACCEPTS, ADDITIONAL W23-6 & RSDS MAY BE ADDED PRIOR TO EACH WORK CREW.
6. RED/WHITE OR BLACK/YELLOW CHEVRON PATTERN OK. SECOND TRANSPORTABLE ATTENUATOR IN RIGHT LANE IS OPTIONAL. ADDITIONAL TRANSPORTABLE ATTENUATORS MAY BE ADDED BEHIND EACH WORK CREW.

7. IF USED, PLACE DEVICES TRANSVERSELY ACROSS CLOSED LANES AT 45°± AND 5' SPACING AT STRATEGIC LOCATIONS.
8. CONTACT WSDOT COMMERCIAL VEHICLE SERVICES (360-704-6340) AT LEAST 7 DAYS IN ADVANCE OF ROADWAY WIDTH RESTRICTIONS.
9. WHEN SHOULDER NARROWS, USE LANE SHIFT (40:1 SHIFT TAPER @ 16' MIN WIDTH) WITH W1-4 SIGN (5' MIN) 500'± PRIOR TO SHIFT AND W1-6 SIGN AT SHIFT TAPER.
10. COVER ALL CONFLICTING SIGNAGE PER STD. SPEC. 1-10.3(3)A. BLACK 1/8" ABS OR 1/4" PLYWOOD TEMP. SIGN COVER PERMITTED.
11. DOWNSTREAM TAPER OPTIONAL ACROSS RIGHT LANE, BUT FIRST 80' REQUIRED. DOWNSTREAM TAPER DEVICE SPACING IS 20'.
12. SIGNS ARE BLACK ON ORANGE UNLESS OTHERWISE INDICATED.

13. PLAN IS APPLICABLE TO LANE CLOSURES OF 7 DAYS OR LESS.
14. NOTIFY PUBLIC OF SPEED REDUCTION AT LEAST 3 DAYS PRIOR VIA PCMS:
45 MPH WZ SPEED LIMIT / BEGINS DAYOFWEEK MM/DD/YY @ 2.0 SEC.
15. ADD W21-30-SERIES SIGNS (48"x48", 5' HEIGHT) 500± PRIOR TO FREQUENT
CONSTRUCTION VEHICLES INGRESS/EGRESS INTO THE OPEN LANE(S).
16. BICYCLIST ACCOMMODATIONS, WHERE FACILITY OPEN TO BICYCLES:
- (A) BICYCLES PROHIBITED VIA R5-601 & R5-6 SIGNS. PROVIDE SIGNED DETOUR
OR ALTERNATIVE ROUTE.
 - (B) BICYCLES PROHIBITED VIA R5-601 & R5-6 SIGNS. PROVIDE FREE SHUTTLE
(WORK TRUCK, VAN, OR BUS OK) + CONTACT INFORMATION OR PHONE BOX.
 - (C) ENGINEER TO ACCEPT ANY ALTERNATIVE STRATEGIES.

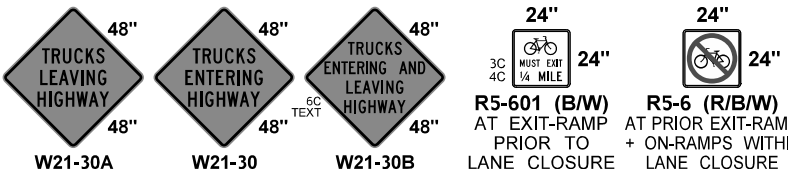

**FREEWAY (2 LANES): SINGLE RIGHT LANE CLOSURE, 9' MAX LEFT SHOULDER SHIFT
(45 MPH WORK ZONE SPEED LIMIT, 40 MPH ADVISORY SPEED)**

NOT TO SCALE

FILE NAME	C:\Users\LintzF\OneDrive - Washington State Department of Transportation\Desktop\Work Zone TCPS\258Fwy1Rt\Lanes9MaxLShft60to45WZSL40Adv.dg							
TIME	7:56:14 AM					REGION NO.	STATE	FED.AID PROJ.NO.
DATE	1/8/2024					10	WASH	
PLOTTED BY	LintzF					JOB NUMBER		
DESIGNED BY								LOCATION NO.
ENTERED BY								
CHECKED BY								
PROJ. ENGR.						CONTRACT NO.		
REGIONAL ADM.								
						REVISION	DATE	BY

PE STAMP BOX

P F STAMP BOX




**Washington State
Department of Transportation**


TYPICAL TRAFFIC CONTROL PLANS

Plot 1


TC258

SHEET
1A
OF
3
SHEETS


FILE NAME C:\Users\LintzF\OneDrive - Washington State Department of Transportation\Desktop\Work Zone TCPs\258Fwy1Rt\Lanes9MaxLtShlft60to45WZSL40Adv.dgn										Plot 3									
TIME 7:56:15 AM						REGION NO. STATE		FED.AID PROJ.NO.										PLAN REF NO	
DATE 1/8/2024						10 WASH												TC258	
PLOTTED BY LintzF						JOB NUMBER		 <p>Washington State Department of Transportation</p>										SHEET 2A OF 3 SHEETS	
DESIGNED BY																			
ENTERED BY						CONTRACT NO.		LOCATION NO.										TYPICAL TRAFFIC CONTROL PLANS	
CHECKED BY																			
PROJ. ENGR.																			
REGIONAL ADM.		REVISION		DATE		BY		<div> <div>P.E. STAMP BOX</div> <div>DATE</div> </div>										<div> <div>P.E. STAMP BOX</div> <div>DATE</div> </div>	

FILE NAME C:\Users\LintzF\OneDrive - Washington State Department of Transportation\Desktop\Work Zone TCPS\258Fwy1RtLanes9MaxLtShlft60to45WZSL40Adv.dgn										Plot 4	
TIME 7:56:16 AM						REGION NO.		STATE		FED.AID PROJ.NO.	
DATE 1/8/2024						10		WASH			
PLOTTED BY LintzF						JOB NUMBER					
DESIGNED BY										 Washington State Department of Transportation	
ENTERED BY											
CHECKED BY											
PROJ. ENGR.						CONTRACT NO.		LOCATION NO.		TYPICAL TRAFFIC CONTROL PLANS	
REGIONAL ADM.		REVISION		DATE		BY					
										P.E. STAMP BOX _____ DATE _____ P.E. STAMP BOX _____ DATE _____	
										SHEET 2B OF 3 SHEETS	


19. SEE DETOUR PLAN FOR ADDITIONAL RAMP CLOSURE DETOUR SIGNAGE.

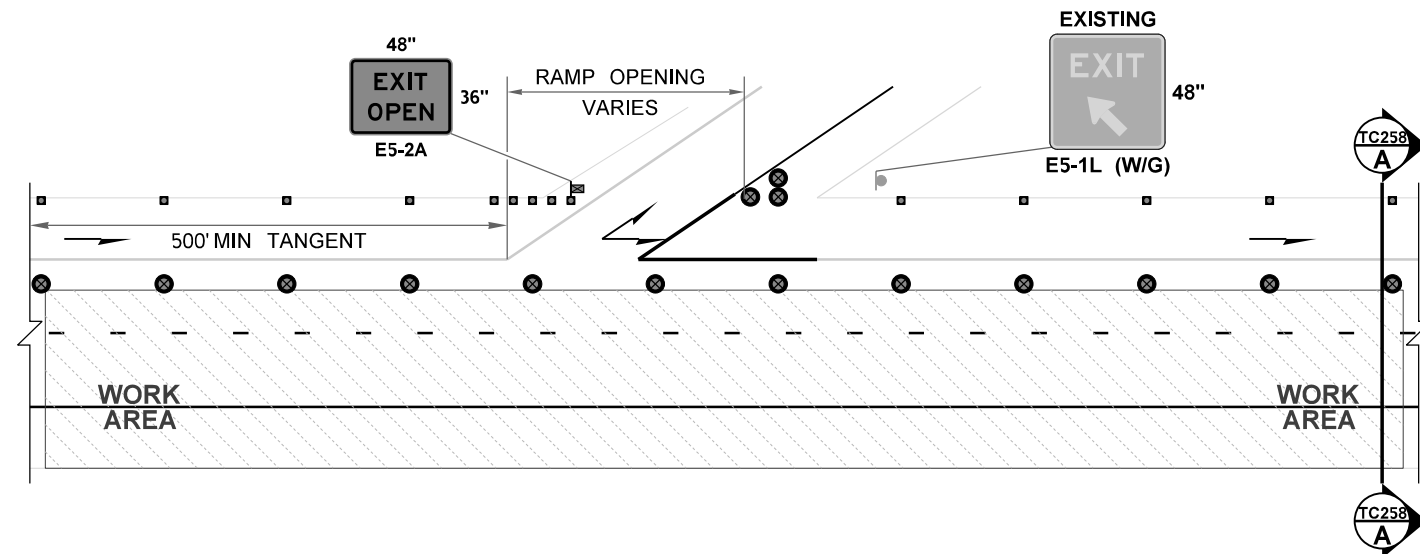

OPEN LEFT EXIT-RAMP DETAIL

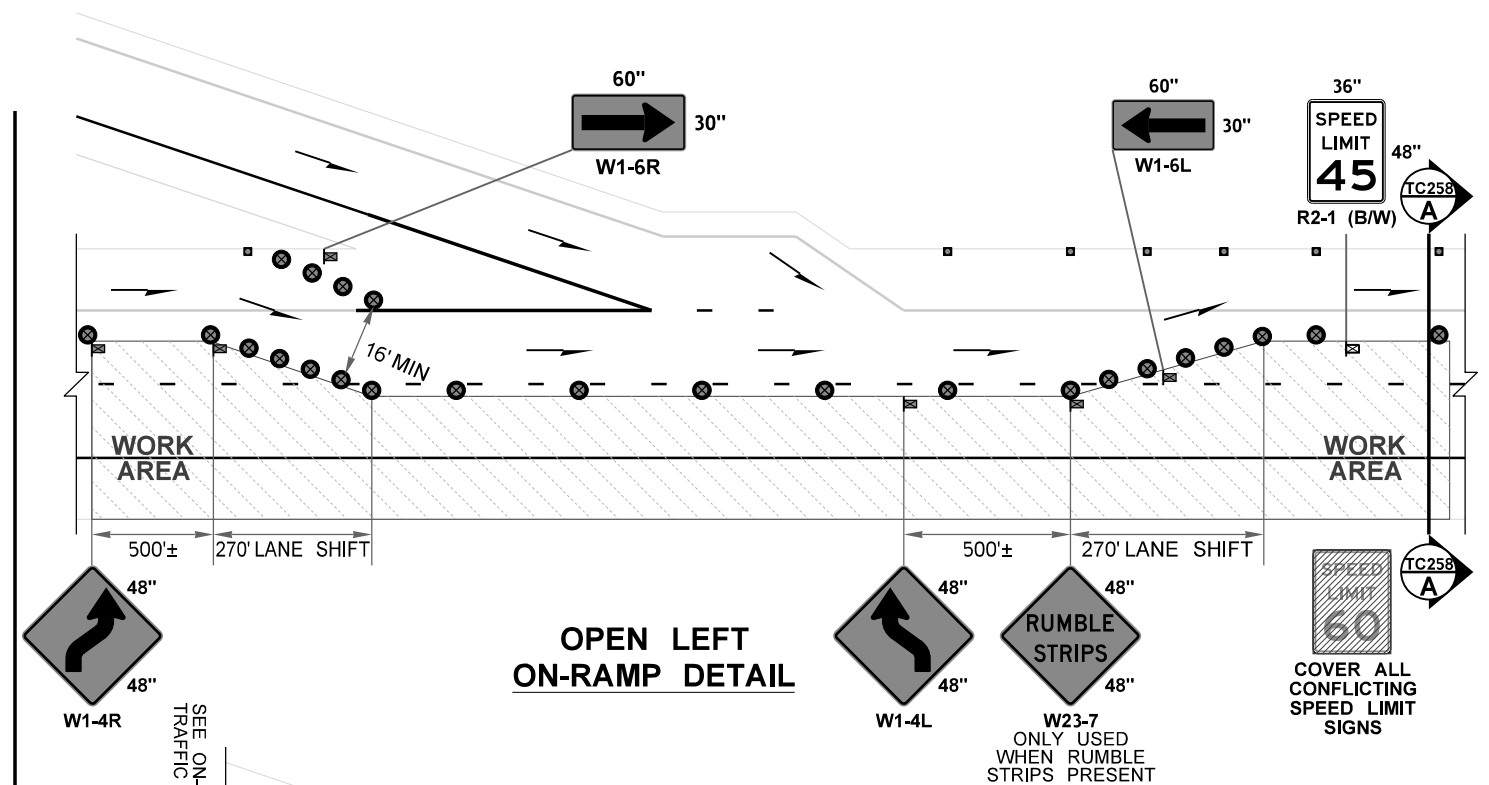

**OPEN LEFT
ON-RAMP DETAIL**

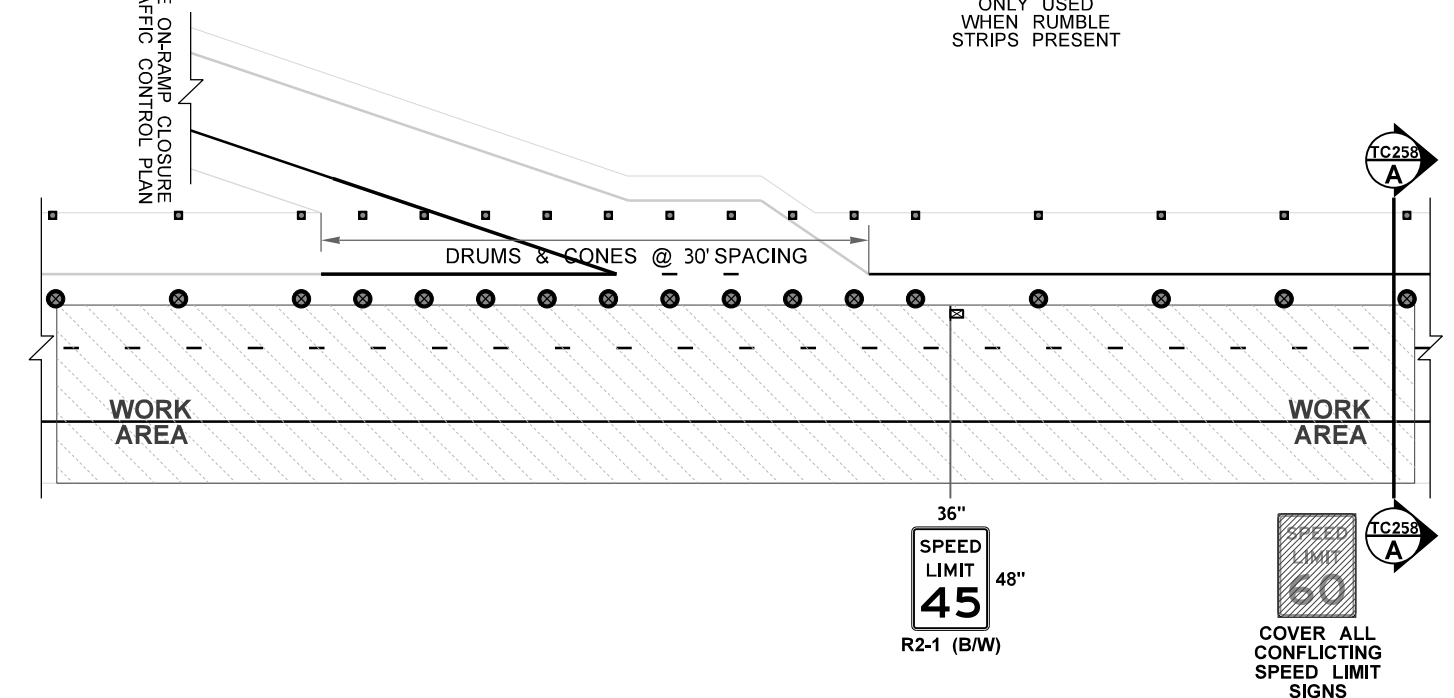

CLOSED LEFT ON-RAMP DETAIL

FREEWAY (2 LANES): SINGLE RIGHT LANE CLOSURE, 9' MAX LEFT SHOULDER SHIFT (45 MPH WORK ZONE SPEED LIMIT, 40 MPH ADVISORY SPEED)

NOT TO SCALE

FILE NAME C:\Users\LintzF\OneDrive - Washington State Department of Transportation\Desktop\Work Zone TCPS\258Fwy1RtLanes9MaxLtShlft60to45WZSL40Adv.dgn										Plot 5																													
TIME 7:56:16 AM							REGION NO. STATE		FED.AID PROJ.NO.																														
DATE 1/8/2024							10 WASH																																
PLOTTED BY LintzF							JOB NUMBER																																
DESIGNED BY									<div><div><div><div><div></div></div></div><div><div>Washington State Department of Transportation</div></div></div></div>																														
ENTERED BY																																							
CHECKED BY																																							
PROJ. ENGR.							CONTRACT NO.		LOCATION NO.																														
REGIONAL ADM.					REVISION		DATE BY		TYPICAL TRAFFIC CONTROL PLANS																														
										P.E. STAMP BOX DATE										P.E. STAMP BOX DATE										SHEET 3 OF 3 SHEETS									

WORK ZONE MICROSTATION CELLS: Updated work zone cells incorporated (January 2024).

WSDOT CAE automatically updates cell libraries on WSDOT and on-site consultant staff computers (no action needed); however, external users or off-site consultants must manually install them. For additional information e-mail HQCAEHlpDesk@wsdot.wa.gov.

Division 4 in WSDOT Plans Preparation Manual, Section 400.06(29), provides updated work zone cell library policy and information for PS&Es. See <https://wsdot.wa.gov/engineering-standards/all-manuals-and-standards/manuals/plans-preparation-manual>

OTHER TYPICAL TCP VERSION EXPLANATION:

TC256 provides 4' max shift alternative of this plan for a typical 2-lane rural freeway configuration with 4' left shoulder.

PLOT USAGE EXPLANATION:

- Plot 1:** Single open lane shifted onto left shoulder (9' max), via single right lane closure, with 45-mph work zone speed limit and 40-mph work crew advisory speed including a single PCMS in advance for queue mitigation.
- Plot 2:** 3-Mile Queue Warning System version of single open lane shifted onto left shoulder (9' max), via single right lane closure, with 45-mph work zone speed limit and 40-mph work crew advisory speed.
- Plot 3:** Right ramp details, including parallel on-ramp, within single open lane shifted onto left shoulder (9' max) with 45-mph work zone speed limit.
- Plot 4:** Right ramp details, including tapered on-ramp, within single open lane shifted onto left shoulder (9' max) 45-mph work zone speed limit.
- Plot 5:** Left ramp details within single open lane shifted onto left shoulder (9' max) with 45-mph work zone speed limit.

OTHER QUEUE MITIGATION PLANS: Available in Typical Traffic Control Plan Library
(<https://wsdot.wa.gov/engineering-standards/all-manuals-and-standards/plan-sheet-library/work-zone-typical-traffic-control-plans-tcp>)

- 6-Mile Queue Warning System:** Plan now separated; see TC157.
- 6-Mile Smart Work Zone System:** See TC167.
- 9-Mile Smart Work Zone System:** See TC177.

DESIGNER NOTES:

- A. Contact Region Transportation Operations to determine if a queuing mitigation system is needed; and if so, which one is appropriate.
- B. Contact Region Transportation Operations to determine if Parallel (Sheet 2A) and/or Tapered (Sheet 2B) temporary left on-ramps are used.
- C. This Typical TCP is not applicable when HOV-restricted or Express Toll Lane(s) are present. Contact Region Transportation Operations for additional guidance.
- D. Per WSDOT Executive Order E1060 (<https://wwwi.wsdot.wa.gov/publications/policies/fulltext/1060.pdf>); speed limit reductions and advisory speeds must be approved for work zones. Submit speed reduction reductions & advisory speed requests for work zones through WSDOT Region Transportation Operations. See Traffic Manual Section 5-18 for additional information for documentation and notification requirements.
- E. These typical traffic control plans (Typical TCPs) may be modified for project-specific, site-specific situations, and/or WSDOT Region Transportation Operations standard practices. Typical TCPs are not "Standard Plans".
- F. Portable Changeable Message Signs (PCMSs) are optional per MUTCD Section 6F.60 and Section 6H and are used to supplement signage and inform motorists of unexpected situations. Thus, if no work zone congestion or queuing is expected, the two PCMS-ALT messages can be deleted but keep the PCMS since traffic is shifted into paved shoulder. Modify all "ROADWAY NARROWS 12' WIDE" PCMS message to match the actual minimum travel width (shy + lane width + shoulder) available through the work zone.
- G. 48"x48" diamond-shaped work zone signs used on freeway mainlines and ramps. Per MUTCD 6H-33, gating temporary signs on both shoulders is Guidance on divided highways and Optional per MUTCD Section 6F.03 P02. Based on engineering judgement, signs on left shoulders is optional on 2-lane freeways with shoulders less than 6' because it is difficult for work crews to install/remove safely and is less critical to have signs gated than on 3-lane or more freeways. If signs are barrier-mounted separating 2-way traffic or on narrow shoulders, a special rectangular-shaped 24"x48" sign should be used. See MUTCD Table 6F-1 for additional temporary sign size information.

DESIGNER NOTES (continued):

- H. Freeway mainline sign spacing may be reduced down to 1000'+/- based on engineering judgement and down to 500'+/- if near interchanges. Along ramps, 200'+/- sign spacing typical but may be reduced farther.
- I. When positioned behind channelization devices, temporary signs should be mounted at 5' minimum. Per MUTCD 6H-42 Note 4 (Standard), a temporary "EXIT" sign shall be mounted 7' minimum when located in the temporary gore.
- J. Work zone traffic control layout for this Typical TCP is based on 45 mph regulatory work zone speed limit.
- K. Traffic safety drums required on freeway lane closure and lane shift tapers and recommended on tangents per Design Manual 1010.07. On tangents 42" tall channelization devices, 36" traffic cones, & 28" traffic cones allowable (vertical panel channelization devices prohibited). Edge of paved shoulder delineated with 28" cones at night--Oversized loads pass over cones without knocking them down, unlike with taller devices. Warning lights on channelization devices being phased out in Washington. Contact Region Transportation Operations for information regarding their standard practices.
- L. Maximum channelization device spacing table for tangents is based on WAC 468-95-301 and may ALWAYS be reduced.
- M. Sequential arrow signs (arrow boards) are required at each freeway lane closure taper per MUTCD Standard Note 6 on TA-33.
- N. Smart sequential arrow signs ("smart arrow boards") are now required on freeways in Washington on new Construction projects (existing projects can still use the conventional sequential arrow sign). Smart sequential arrow signs have communication capabilities--old arrow boards can be retrofitted--to broadcast the status of the arrow display with third-party vendors like Google Maps/Waze and Traffic Management Centers. Include the following General Special Provisions for Materials, Specification, Measurement, and Payment. <https://wsdot.wa.gov/publications/fulltext/projectdev/gspspdf/egsp1.pdf>
- * 1-10.3(3)B(9-35.4).GR1 (Smart Sequential Arrow Sign Materials GSP)
 - * 1-10.3(3)B(9-35.4).OPT1.2025.GR1 (Smart Sequential Arrow Sign Specifications GSP)
 - * Measurement and Payment are still hourly per "SEQUENTIAL ARROW SIGN". No new bid item developed.
- O. Radar speed display signs are typical practice for freeway lane closures with speed limit reductions. When used, include the following General Special Provisions for Materials, Specification, Measurement, and Payment. <https://wsdot.wa.gov/publications/fulltext/projectdev/gspspdf/egsp1.pdf>
- * 1-10.3(3).OPT2.GR1 (Radar Speed Display Sign Specification GSP)
 - * 1-10.3(3)(9-35.8).GR1 (Radar Speed Display Sign Materials GSP)
 - * 1-10.3(3)(9-35.8).OPT1.2025.GR1 (Radar Speed Display Sign Specifications GSP, will be placed in 2025 Standard Specifications)
 - * 1-10.4(2).OPT3.GR1 (Radar Speed Display Sign Measurement GSP, if not Lump Sum) "HOUR"
 - * 1-10.5(2).OPT2.GR1 (Radar Speed Display Sign Payment GSP, if not Lump Sum) "HOUR"
- P. Longitudinal buffer spaces (B) are optional per MUTCD Section 6C.06 but is desired when practical. Longitudinal buffers are the most adjustable component that may be increased/decreased to move lane closure tapers away from horizontal/vertical curves and from on-ramp merges.
- Q. The lateral buffer (transverse distance between open travel lanes and work area) is typically 2 feet on freeways. Actual work area limits may be modified.
- R. Per MUTCD Figure 6C-2, the downstream taper is optional. Eliminating it allows construction vehicles to accelerate out of work area into reopened lane to minimize traffic impacts and increase safety.
- S. A 20:1 tapered temporary exit-ramp is typical, but 15:1 is acceptable. The exit-ramp travel way width may range from 12 to 16 feet.
- T. The on-ramp shift may occur across the paved on-ramp gore at "L/2", but verify the gore's cross-slope is traversable, pavement thickness adequate, and catch basin & ITS boxes are traffic bearing types. This Typical TCP begins the ramp shift at the end of the marked gore for simplicity.
- U. Two types of temporary on-ramp configurations, parallel and tapered. Parallel on-ramp uses a L/2 per lane ramp shift, L/2 MIN acceleration pocket that may be extended when space allows, and L ramp merge taper based on MUTCD Guidance Figure 6H-44. However, a L/2 ramp merge taper is allowable based on engineering judgment, see WSDOT Design Manual Exhibit 1360-17 for guidance. Tapered on-ramp uses a single 50:1 taper (for all speeds) from the end of the marked gore to the end of the merge, see WSDOT Design Manual Exhibit 1360-16 for guidance.
- V. Ramp detour signage is recommended by MUTCD 6C.09, but using alternative routes is acceptable. Contact Region Transportation Operations for their standard practice. Recommended to use route-specific detour signage for significant ramp closures.

FREEWAY (2 LANES): SINGLE RIGHT LANE CLOSURE, 9' MAX LEFT SHOULDER SHIFT (45 MPH WORK ZONE SPEED LIMIT, 40 MPH ADVISORY SPEED)

	INFORMATIONAL USE ONLY	Plot 6
	DO NOT INCLUDE THIS SHEET IN CONTRACT PS&Es or TCP SUBMITTALS.	TC258
	DESIGNER GUIDANCE	