DRAWN BY: FERN LIDDELL



ALLOWABLE ALTERNATIVE
TIE-DOWN METHOD

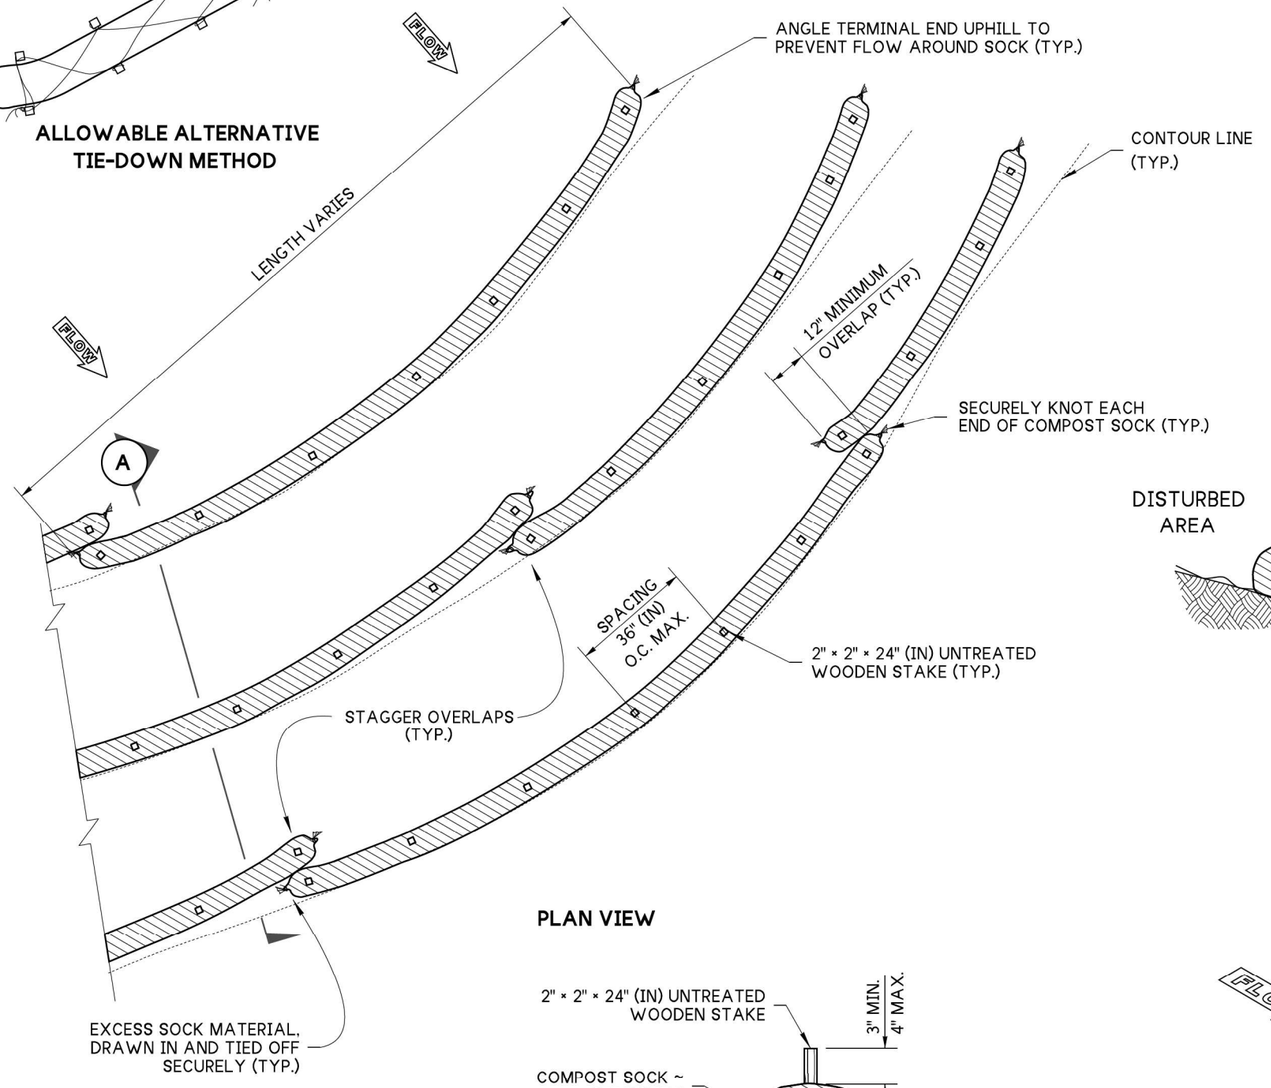

PLAN VIEW

8" DIAMETER MINIMUM COMPOST SOCK SPACING TABLE	
SLOPE	MAXIMUM SPACING
1H : 1V	5' - 0"
2H : 1V	10' - 0"
3H : 1V	15' - 0"
4H : 1V	20' - 0"

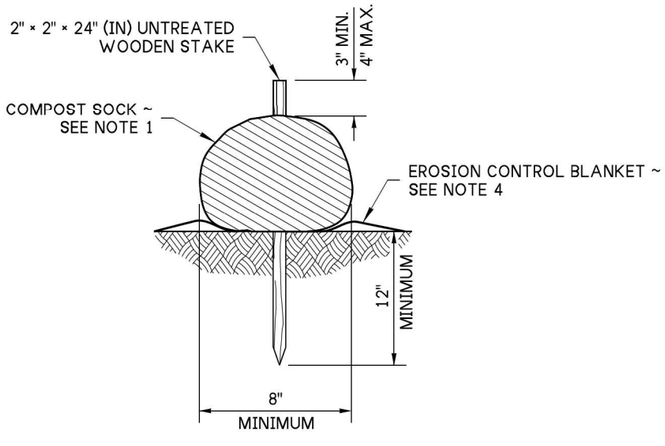

COMPOST SOCK DETAIL

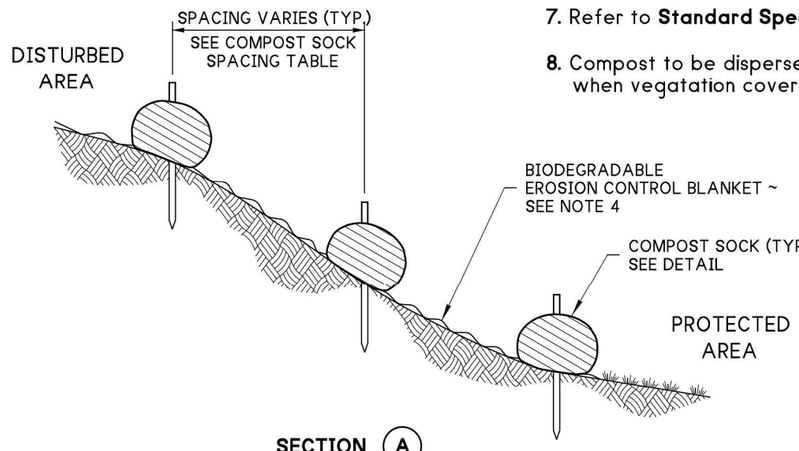

SECTION (A)

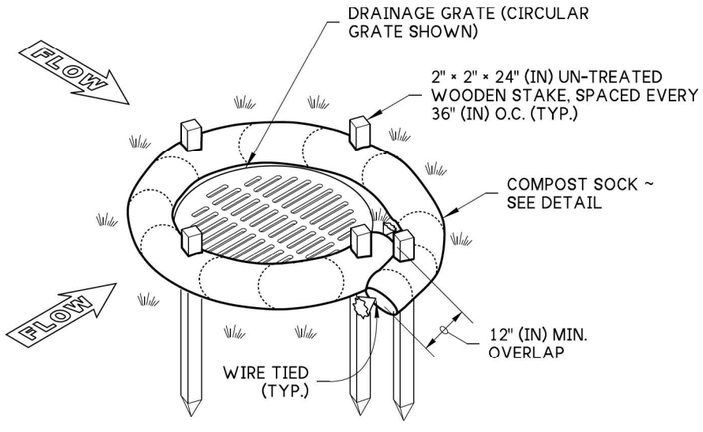

ISOMETRIC VIEW

CATCH BASIN INSTALLATION

NOTES

1. Compost Sock shall be in accordance with **Standard Specification Section 9-14.6(6)**.
2. Install Compost Sock perpendicular to flow along contours.
3. Securely knot each end of the Compost Sock. Overlap adjacent Compost Sock ends 12" (in) behind one another and securely tie together.
4. If Erosion Control Blanket is specified, place Compost Sock on top of blanket. See **Standard Plan I-60.10**.
5. Perform maintenance in accordance with **Standard Specification Section 8-01.3(15)**.
6. Remove sediment from the up slope side of the Compost Sock when accumulation has reached 1/2 of the effective height of the Compost Sock without compromising the intended function of the Compost Sock per **Standard Specification Section 8-01.3(12)** as determined by the Engineer.
7. Refer to **Standard Specification Section 8-01.3(16)** for removal.
8. Compost to be dispersed on site as determined by the Engineer, when vegatation covers the surface.

May 21, 2026

COMPOST SOCK

STANDARD PLAN I-30.40-03

SHEET 1 OF 1 SHEET

APPROVED FOR PUBLICATION
Mark A Hoines May 21, 2026
STATE DESIGN ENGINEER
Washington State Department of Transportation