

MINIMUM LANE CLOSURE TAPER LENGTH = L (feet)										
LANE WIDTH (feet)	Posted Speed (mph)									
	25	30	35	40	45	50	55	60	65	70
10	-	-	-	-	450	500	550	-	-	-
11	-	-	-	-	495	550	605	660	-	-
12	-	-	-	-	540	600	660	720	780	840

SIGN SPACING = X (1)		
FREEWAYS & EXPRESSWAYS	55 / 70 MPH	1500' ±
RURAL HIGHWAYS	60 / 65 MPH	800' ±
RURAL ROADS	45 / 55 MPH	500' ±

(1) ALL SPACING MAY BE ADJUSTED TO ACCOMMODATE INTERCHANGE RAMP, AT-GRADE INTERSECTIONS AND DRIVEWAYS.

BUFFER DATA											
LONGITUDINAL BUFFER SPACE = B											
SPEED (MPH)	25	30	35	40	45	50	55	60	65	70	
LENGTH (feet)	155	200	250	305	360	425	495	570	645	730	
TRANSPORTABLE ATTENUATOR ROLL AHEAD DISTANCE = R											
HOST VEHICLE WEIGHT 9,900 TO 22,000 lbs.						HOST VEHICLE WEIGHT > 22,000 lbs.					
< 45 MPH	45-55 MPH	> 55 MPH	< 45 MPH	45-55 MPH	> 55 MPH	100'	123'	172'	74'	100'	150'


MINIMUM SHOULDER TAPER LENGTH = L/3 (feet)										
SHOULDER WIDTH (feet)	Posted Speed (mph)									
	25	30	35	40	45	50	55	60	65	70
8'	-	-	-	-	120	130	150	160	170	190
10'	-	-	-	-	150	170	190	200	220	240

USE A MINIMUM 3 DEVICES TAPER FOR SHOULDER LESS THEN 8'.

CHANNELIZATION DEVICE SPACING (feet)		
MPH	TAPER	TANGENT
50/70	40	80
40/45	30	60

PCMS	
1	2
RIGHT LANE CLOSURE	1 MILE AHEAD
2.0 SEC	2.0 SEC

FIELD LOCATE 1 MILE ± IN ADVANCE OF LANE CLOSURE SIGNING.

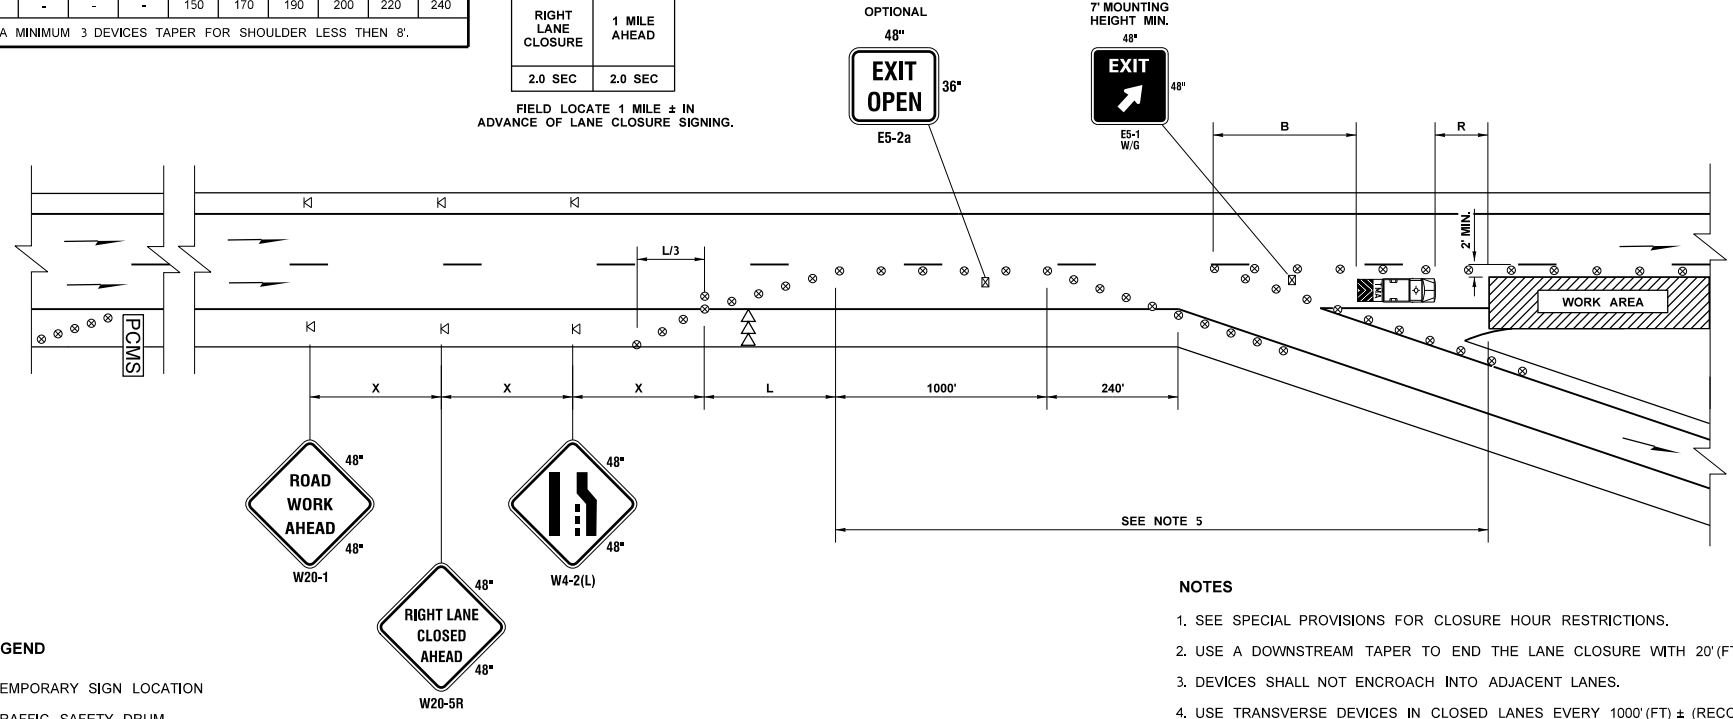

- NOTES**
- SEE SPECIAL PROVISIONS FOR CLOSURE HOUR RESTRICTIONS.
 - USE A DOWNSTREAM TAPER TO END THE LANE CLOSURE WITH 20'(FT) DEVICE SPACING.
 - DEVICES SHALL NOT ENCOACH INTO ADJACENT LANES.
 - USE TRANSVERSE DEVICES IN CLOSED LANES EVERY 1000'(FT) ± (RECOMMENDED).
 - SEE SHEET TCXX FOR A SHORT TERM OFF-RAMP CLOSURE WHEN THE WORK AREA LOCATION RESTRICTS RAMP ACCESS.
 - ALL SIGNS ARE BLACK ON ORANGE UNLESS OTHERWISE DESIGNATED.

TEMPORARY OFF-RAMP FOR MULTI-LANE ROADWAYS

NOT TO SCALE

- LEGEND**
- KI TEMPORARY SIGN LOCATION
 - ⊗ TRAFFIC SAFETY DRUM
 - ⇨ SEQUENTIAL ARROW SIGN
 - ⊠ TRANSPORTABLE ATTENUATOR
 - PCMS PORTABLE CHANGEABLE MESSAGE SIGN
 - ⊠ TEMPORARY SIGN LOCATION (5' MOUNTING HEIGHT)

FILE NAME	S:\Design R P& S\4-Standards\2-Plan Sheet Library\01-Published PSL(TC) Work Zone Traffic Control(TC-7) Temporary Off-Ramp for Multi-Lane Roadways\TC-7.dgn	REGION NO.	STATE	FED.AID PROJ.NO.	DATE	P.E. STAMP BOX	DATE	P.E. STAMP BOX	Plot 1
TIME	9:24:13 AM								PLAN REF NO
DATE	1/3/2018								TC7
PLOTTED BY	liddelf								SHEET
DESIGNED BY									OF
ENTERED BY									SHEETS
CHECKED BY									
PROJ. ENGR.									
REGIONAL ADM.		REVISION	DATE	BY					TRAFFIC CONTROL PLAN



TRAFFIC CONTROL PLAN