

Ultra-High-Speed Ground Transportation Feasibility Study

Joint Transportation Committee

Ron Pate, Director
WSDOT Rail, Freight and Ports Division
December 14, 2017

Scott Richman
CH2M HILL, INC

Roger Millar, Secretary of Transportation
Keith Metcalf, Deputy Secretary of Transportation

UHSGT study framework



Legislature funded \$300,000 feasibility study to:

- Identify conceptual corridors to study
- Describe UHSGT technology options and pre-planning-level analysis inputs
- Evaluation (CONNECT):
 - Ridership and revenue analysis
 - Cost recovery
- Institutional/cross-border framework
- Potential funding and financing model/mechanisms
- Recommendations

Microsoft contributed \$50,000 and the Trades contributed \$10,000 for additional economic analysis still in progress to be completed by December 31

Advisory Group



23-member non-voting advisory group assisted with study

Members represent economic, transportation and community interests

- Washington Governor's Office
- British Columbia Ministry of Transportation
- Oregon Department of Transportation
- Puget Sound Regional Council
- Utilities and Transportation Commission
- Washington Department of Commerce
- City of Seattle
- City of Portland
- Sound Transit
- Seattle Chamber of Commerce
- Snohomish County Executive
- Office of King County Executive
- Microsoft
- Alaska Airlines
- Fred Hutchinson Cancer Research Center
- Association of Washington Business
- Futurewise
- Prosper Portland
- Transportation Choices
- Washington CleanTech Alliance
- Portland Business Alliance
- Business Council of British Columbia
- FastTrackWa.org
- Washington Building Trades
- University of Washington
- Tourism Vancouver

Others interested in the topic signed up to receive email updates on the progress of the study

General criteria to evaluate:

- **In a mega-region** (*Cascadia*)
- **Cities/metro areas** - larger populations
(*Vancouver – Seattle – Portland*)
- **100-500 mi travel distance**
(*Vancouver to Portland ~350 miles*)
- Interconnected with **regional/local transit**
- Metropolitan **economic productivity**
- **Congested areas** (*autos and air*)



Technology options

Three technologies reviewed

- High-speed rail
- Maglev
- Hyperloop



Technology Option	Current Maximum Speed	Maximum Design Speed	Maximum Seating Capacity	Minimum Horizontal Curve	Maximum Gradient
High-speed Rail	220 mph	250 mph	1,500	4.7 miles	4%
Maglev	270 mph	375 mph	824	5.7 miles	10%
Hyperloop	200 mph*	760 mph	28 per capsule	3.0 miles	n/a

*Test track speed, which was limited by length of test track.

- FRA modeling tool for high level intercity passenger rail pre-planning
- All CONNECT results presented in ranges
- Area representation of a rail corridor or network (Core-based statistical areas – not cities)
- Seattle and Tacoma in same CBSA - no trips under 50 miles captured
- Provides the ability to:
 - Describe a potential high-performance rail network – coarse level
 - Estimate the financial and operational performance of the network
 - Develop high-level service plans
 - Generate operational data



Primary corridor

- Between Vancouver, British Columbia and Portland, Oregon

Connecting corridors

- East-West via the Stampede Pass (possibly Ellensburg, Moses Lake, Spokane)
- South connection to California High Speed Rail

Passengers

- Number of seats filled
- Passenger miles
- Shift to rail from other modes

Cost recovery

- Fare box recovery
- Capital and maintenance costs

Potential funding and financing model/mechanisms



- Base year – 2015
- Forecast year – 2035
- Horizon year – 2055


Conducted four rounds of analysis to determine most viable options

- Started with 5 conceptual corridors
- Narrowed to three primary corridor options (1A, 2 and 4)
- Determined 12 daily round trips appear to be optimal number before diminishing return
- Evaluated the effect of connecting to new east-west route to Spokane and viability of connecting to California High Speed rail in Sacramento

Corridor	Nearest Station Locations	
1	Pacific Central Station – Vancouver, B.C. Fairhaven Station – Bellingham, WA Everett Station (new station near Delta Yard) – Everett, WA Stadium Station – Seattle, WA Tacoma Dome Station – Tacoma, WA Centennial Station – Lacey, WA Rose Quarter Station (TriMet Max station) – Portland, OR	
1A	Vancouver International Airport – Vancouver, B.C. Fairhaven Station – Bellingham, WA Everett Station – Everett, WA Stadium Station – Seattle, WA Tacoma Dome Station – Tacoma, WA Centennial Station – Lacey, WA Rose Quarter Station – Portland, OR	All seven cities identified in legislation
2	Pacific Central Station – Vancouver, B.C. Stadium Station - Seattle, WA Tacoma Dome Station – Tacoma, WA Portland International Airport – Portland, OR	Four largest cities
3	Pacific Central Station – Vancouver, B.C. Stadium Station - Seattle, WA Rose Quarter Station – Portland, OR	
4	King George Station – Surrey, B.C. Tukwila Station – Seattle, WA Expo Center Station – Portland, OR	Outside city core of three largest cities

Key findings - ridership

- Corridor 1A with 7 stations has highest ridership (2 million with high-speed rail and 2.1 million with MagLev)
- Corridor 4 with three stations outside city cores has lowest capital costs, but also lowest ridership
- Between 13% and 17% of travelers might use high speed trains in 2035 (highest mode share under Corridor 2)
- In 2035, projected annual ridership ranges from 1.7 to 2.1 million for primary corridor options
- In 2055, projected annual ridership ranges from 2.8 to 3.2 million for primary corridor options

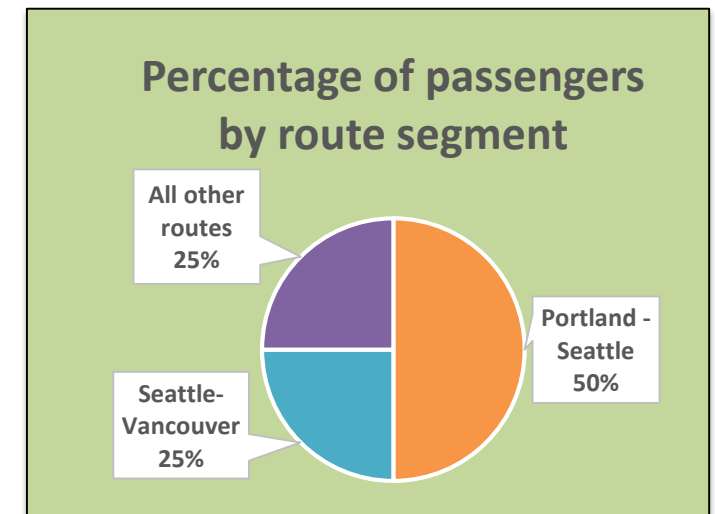

Capital costs

- Range from \$24 to \$42 billion* (assumptions include all three technologies and tunneling)
- Maglev has higher capital costs (need straighter route and more costly technology)
- High speed rail has wider range of capital costs (depending on alignment, tunnels, bridges, ROW)

Operating costs

- Maglev has potential to cover operating costs by 2035
- High-speed rail has potential to cover operating costs by 2055
- Hyperloop's operational model is still under development (data not readily available)

* Range of \$24-\$42 billion encompasses the needs of all three technologies, including some that require very straight routes with minimal curvature and/or subgrade development with tunneling. When these capital parameters are narrowed down following a more detailed analysis, cost range could be reduced by 25 percent or more.

Geography

- Seattle to Portland connection is critical to any future UHSGT options
- Additional service increases on existing Amtrak Cascades corridor as interim steps could build greater demand and market share
- New east-west corridor could add 15 to 25% to network ridership, but would require subsidies through at least 2035
- Connecting corridor from Portland to Sacramento should be planned beyond the 2055 time horizon



Technology differentiation

- In 2035, Mag-Lev has potential to cover O&M costs in most alternatives
- In 2035, costs may not be completely covered for HSR
- By 2055, all technologies cover O&M and to varying degrees cover further development costs

Demand shares

- For these technologies at 12 daily round trips, 12-17% of the travel market is diverted to UHSGT mode by 2035
- Preliminary data indicate maximum passenger loads might double between 2035 and 2055



Next steps – recommendations

- Perform a next phase **corridor planning/business case study**
- Enhance **ridership evaluation** to inform and support the corridor planning study
- Evaluate **governance and economic framework**
- Further evaluate **funding and financing mechanisms**
- Strengthen focused involvement of **key stakeholders in BC, WA and OR**
- Conduct further **rail planning** consistent with needs of a **UHS GT** program



Questions?



For more information, please
contact:

Ron Pate, Director

Rail, Freight, and Ports Division

PateRD@wsdot.wa.gov

360-705-6903